

A range of phono leads designed to enhance sound quality of interconnection of all type of professional audio equipment.

Low loss Gotham GAC-1 single core audio cable with stranded copper conductor, polyethelene insulation and double lapped copper shield.


Fully shielded professional phono plugs manufactured from machined brass with gold plated contacts and black finished cap.

Hand soldered and individually tested for reliability.

Available in pairs, colour coded red and black.


RATED VOLTAGE: 50V

Dimensions

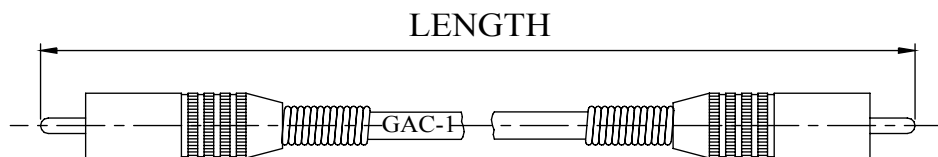

CABLE
JACKET PVC, Ø5.3mm
SHIELD 1 Lapped 0.1mm stranded copper.
SHIELD 2 Lapped 0.1mm stranded copper.
INNER SLEEVE Conductor PVC.
INSULATION Polyethelene 1.25mm
CONDUCTOR 48x0.07mm stranded copper

CONNECTOR
CONTACT Brass, 0.5 microns gold plated.
SHIELD Brass, 0.5 microns gold plated.
CAP Brass, black chrome plated.



Deltron Part No.	Description
061-0005	ONE PAIR RED AND BLACK (0,5 m)
061-0010	ONE PAIR RED AND BLACK (1,0 m)
061-0020	ONE PAIR RED AND BLACK (2,0 m)
061-0030	ONE PAIR RED AND BLACK (3,0 m)

Tel No. +44(0)1724 273200 Website www.dem-uk.com



PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF
ALPHA 3 MANUFACTURING.
ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF
ALPHA 3 MANUFACTURING IS PROHIBITED.

DEM Manufacturing, Deltron Emcon House
Hargreaves Way, Sawcliffe Ind. Park,
Scunthorpe, North Lincolnshire, DN15 8RF, UK

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETRES
LINEAR TOLERANCE:
NO DECIMAL PLACES $\pm 0.5\text{mm}$
1 DECIMAL PLACE $\pm 0.25\text{mm}$
2 DECIMAL PLACES $\pm 0.125\text{mm}$
ANGULAR TOLERANCE: $\pm 1^\circ$

FINISH HIGH DEFINITION
PHONO LEADS

IF IN DOUBT ASK
DO NOT SCALE DRAWING

MATERIAL SEE NOTE

DEBURR AND BREAK
SHARP EDGES

DRAWN BY
APPROVED BY

THIRD ANGLE PROJECTION



SPB

WC

SHEET 1 OF 1

SCALE 1:1

A4

TITLE GENERAL SPECIFICATION
061 SERIES
PHONO LEADS

DRAWING NO. 061 SERIES

ISSUE 04

Release