


An interconnection lead comprising of two, nickel plated phono plugs to two, nickel plated phono plugs, each with strain relief. The phono leads are colour coded and the assembly is manufactured from twin, screened, grey PVC cable.

Dimensions

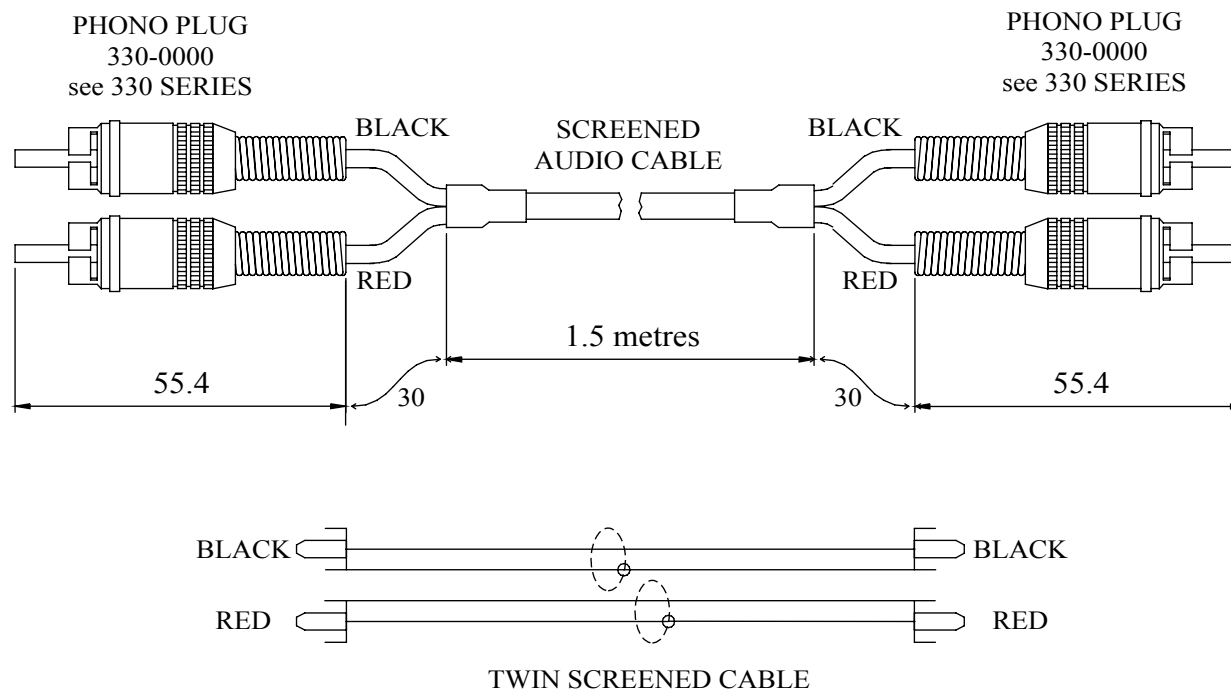

CABLE (MECHANICAL)

JACKET : Ø 2,7mm x 5.3mm PVC,
two parallel cores, grey

INSULATION : Ø 1,25mm PE

CONDUCTORS : 18 x Ø 0,1mm Copper

CABLE (ELECTRICAL)

COND. RESIST. : 148 Ohm/Km

CAPACITANCE : 150 nF/Km

INSUL. RESIST. : > 1 GigaOhm/Km

TEST VOLTAGE : 800 Vrms

RATED VOLTAGE : 50 V

TEMP. RANGE : -25°C to +70°C

Tel No. +44(0)1724 273200 Website www.dem-uk.com



PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF
ALPHA 3 MANUFACTURING.
ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF
ALPHA 3 MANUFACTURING IS PROHIBITED.

DEM Manufacturing, Deltron Emcon House
Hargreaves Way, Sawcliffe Ind. Park,
Scunthorpe, North Lincolnshire, DN15 8RF, UK

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETRES
LINEAR TOLERANCE:
NO DECIMAL PLACES $\pm 0.5\text{mm}$
1 DECIMAL PLACE $\pm 0.25\text{mm}$
2 DECIMAL PLACES $\pm 0.125\text{mm}$
ANGULAR TOLERANCE: $\pm 1^\circ$

FINISH PHONO PLUG TO PHONO PLUG LEADS
IF IN DOUBT ASK
DO NOT SCALE DRAWING

MATERIAL SEE NOTE

DEBURR AND BREAK
SHARP EDGES

DRAWN BY
APPROVED BY
THIRD ANGLE PROJECTION

SPB
WC
SHEET 1 OF 1
SCALE 1:1
A4

TITLE GENERAL SPECIFICATION
FOR
093-0600

DRAWING NO. 093-0600

ISSUE 02
Release