


Shrouded jaws make this product ideally suitable for instrumentation usage. The rear entry socket will accept 4mm plugs or wires clamped by an integral screw. The acetal moulding is available in two colours, red or black, and the internal metalwork is nickel plated steel.

Rated at 10 Amps
Operating Voltage 50 V

NOT FOR NEW DESIGNS

Dimensions

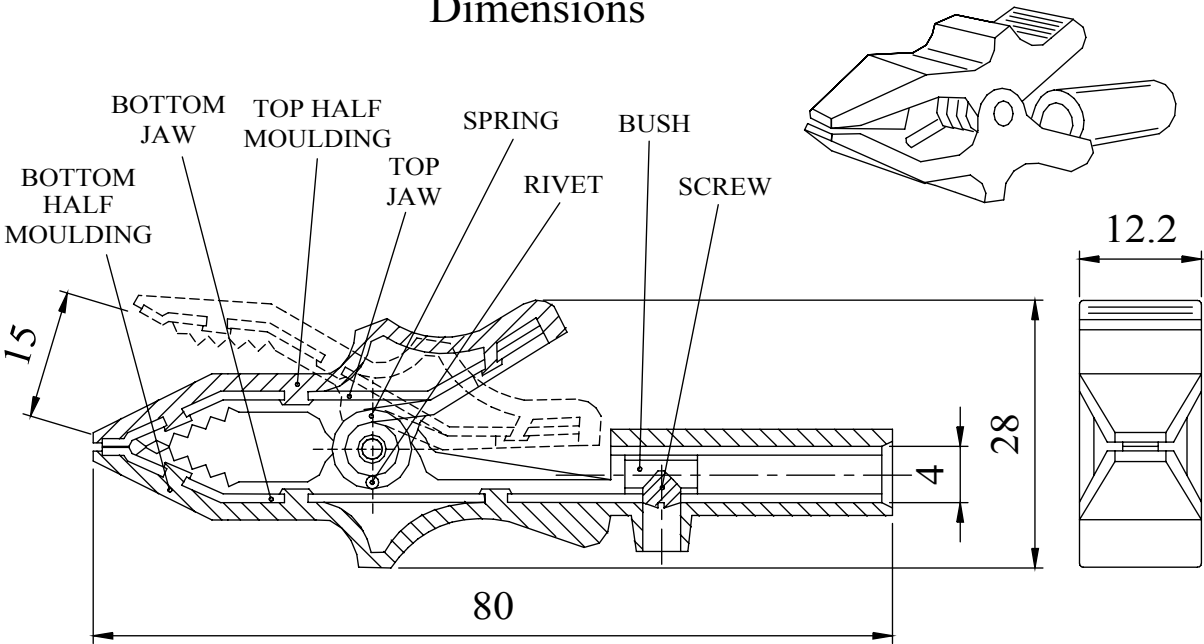

MATERIALS

TOP HALF MOULDING	Noryl SE1 604
TOP JAW	B.M.S., Nickel plated
BOTTOM HALF MOULDING	Noryl SE1 604
BOTTOM JAW	B.M.S., Nickel plated
SPRING	Spring Steel
RIVET	Brass
BUSH	Brass
SCREW	Brass

307-0100	BLACK
307-0500	RED

Tel No. +44(0)1724 273200 Website www.dem-uk.com



PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF
ALPHA 3 MANUFACTURING.
ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF
ALPHA 3 MANUFACTURING IS PROHIBITED.
DEM Manufacturing, Deltron Emcon House
Largreaves Way, Sawcliffe Ind. Park,
Scunthorpe, North Lincolnshire, DN15 8RF, UK

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETRES
LINEAR TOLERANCE:
NO DECIMAL PLACES $\pm 0.5\text{mm}$
1 DECIMAL PLACE $\pm 0.25\text{mm}$
2 DECIMAL PLACES $\pm 0.125\text{mm}$
ANGULAR TOLERANCE: $\pm 1^\circ$

FINISH LARGE INSULATED CROCODILE CLIP
IF IN DOUBT ASK
DO NOT SCALE DRAWING

MATERIAL SEE NOTE

DEBURR AND BREAK SHARP EDGES

DRAWN BY
APPROVED BY



SPB
WC
SHEET 1 OF 1
SCALE 1:1
A4

TITLE GENERAL SPECIFICATION
LARGE CROCODILE CLIP

DRAWING NO.
307 SERIES

ISSUE 06
Release