


A standard in-line 4mm banana plug with a stainless steel contact spring.  
The large rear diameter of this plug will accept cables with a conductor of up 5,5mm (10 awg). The lead wire is held by soldering in a large solder bucket,

The product is also supplied with a large diameter insulating cover that accepts cables with a maximum outside diameter of 7,1mm. Nickel plating Plug Body

Material	
Contact spring	Stainless steel, BS302
Plug body	Brass TR1 CZ 131
Plug housing	Acetal, C 27021 R
Body plating	Nickel plating
Rating	16 Amps
Voltage	50 Volts MAX

## Dimensions

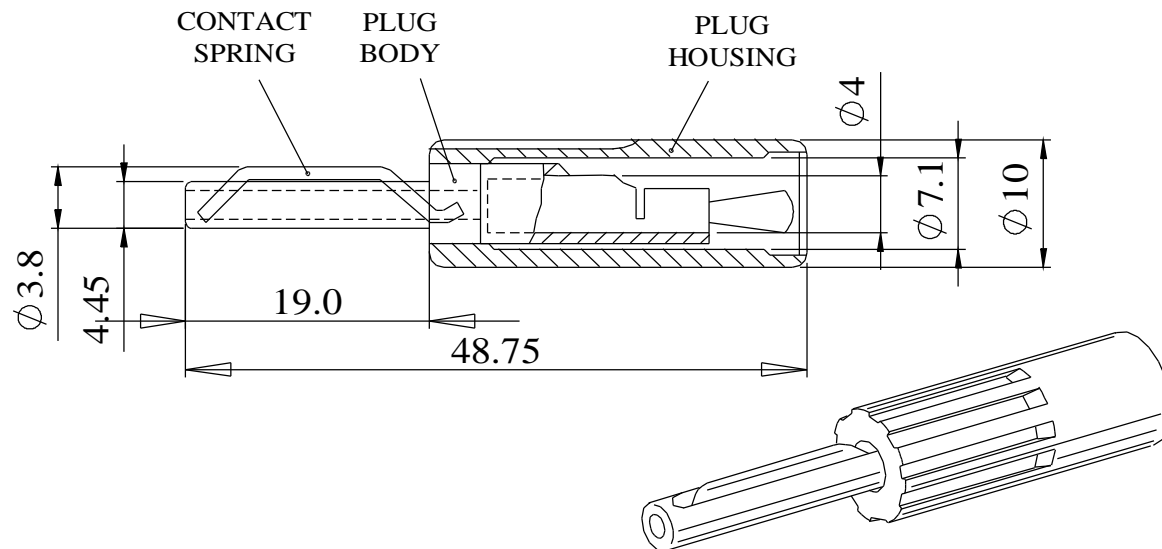

Part No.	Colour & Plug Plating	
579-0100	BLACK	(Nickel Plated)
579-0200	BLUE	(Nickel Plated)
579-0300	BROWN	(Nickel Plated)
579-0400	GREEN	(Nickel Plated)
579-0500	RED	(Nickel Plated)
579-0600	WHITE	(Nickel Plated)
579-0700	YELLOW	(Nickel Plated)

Tel No. +44(0)1724 273200 Website [www.dem-uk.com](http://www.dem-uk.com)



**PROPRIETARY AND CONFIDENTIAL**  
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF  
**ALPHA 3 MANUFACTURING**  
ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF  
**ALPHA 3 MANUFACTURING** IS PROHIBITED.

**DEM** DEM Manufacturing, Deltron Emcon House  
Hargreaves Way, Sawcliffe Ind. Park,  
Scunthorpe, North Lincolnshire, DN15 8RF, UK

UNLESS OTHERWISE SPECIFIED:  
DIMENSIONS ARE IN MILLIMETRES  
LINEAR TOLERANCE:  
**NO DECIMAL PLACES  $\pm 0.5\text{mm}$**   
**1 DECIMAL PLACE  $\pm 0.25\text{mm}$**   
**2 DECIMAL PLACES  $\pm 0.125\text{mm}$**   
ANGULAR TOLERANCE:  $\pm 1^\circ$

FINISH STANDARD 4MM PLUG SPB  
IF IN DOUBT ASK  
DO NOT SCALE DRAWING

MATERIAL -

DEBURR AND BREAK SHARP EDGES

DRAWN BY  
APPROVED BY  
THIRD ANGLE PROJECTION

WC  
SEE NOTE  
SHEET 1 OF 1  
SCALE 1:1  
A4

TITLE GENERAL SPECIFICATION  
579 SERIES  
PLUG

DRAWING NO. 579 SERIES

ISSUE **01**  
Release