



A RANGE OF CHASSIS MOUNTING DIN SOCKETS  
DESIGNED FOR PANEL MOUNTING VIA TWO FLANGES  
(DESIGNED FOR USE WITH M3 SCREW NOT SUPPLIED)  
THESE SOCKETS MATE WITH ALL STANDARD LOCKABLE DIN PLUGS  
AVAILABLE IN TWO FINISHES, BRIGHT NICKEL AND BLACK CHROME

MANUFACTURED TO DIN 41524, 45322, 45326, 45327 AND 45329

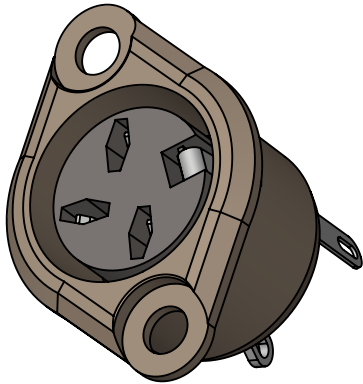


DIMENSIONS

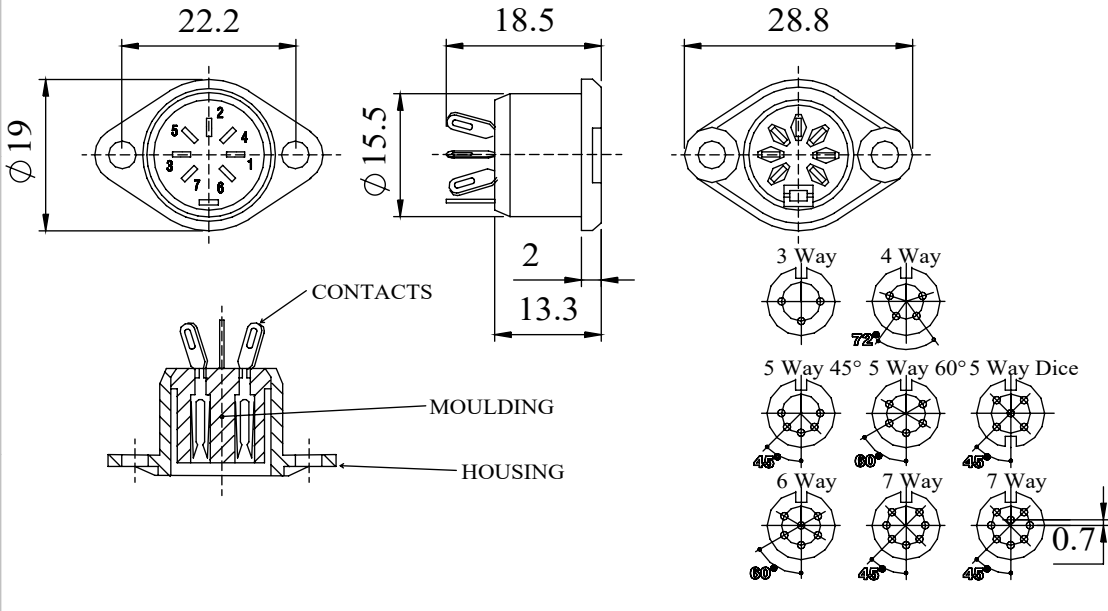


| MATERIALS               |                                     |
|-------------------------|-------------------------------------|
| HOUSING                 | MAZAK                               |
| HOUSING FINISH          | BRIGHT NICKEL PLATE OR BLACK CHROME |
| MOULDING                | LEXAN 500R                          |
| CONTACT MATERIAL        | BRASS                               |
| CONTACT FINISH          | SILVER ON COPPER & ANTI-TARNISH     |
| EARTH TAG MATERIAL      | PHOSPHER BRONZE                     |
| EARTH TAG FINISH        | SILVER ON COPPER & ANTI-TARNISH     |
| ELECTRICAL              |                                     |
| RATED VOLTAGE           | 34 V AC OR DC                       |
| CURRENT RATING          | 2 Amps                              |
| TEST VOLTAGE            | 500 V r.m.s                         |
| INSULATION RESISTANCE   | 103 MΩ MIN AT 100 V DC              |
| CONTACT RESISTANCE      | 10mΩ MAX                            |
| CAPACITANCE (MATED)     | 3pF                                 |
| CLIMATIC                |                                     |
| CLIMATIC CATEGORY       | 25/070/21                           |
| TEMPERATURE RANGE       | -25°C TO +70°C                      |
| DAMP HEAT, STEADY STATE | 21 DAYS                             |

| TYPE       | PART NUMBER   |          |
|------------|---------------|----------|
|            | BRIGHT NICKEL | BLACK    |
| 3 WAY      | 630-0300      | 631-0300 |
| 4 WAY      | 630-0400      | 631-0400 |
| 5 WAY 45°  | 630-0500      | 631-0500 |
| 5 WAY 60°  | 630-0510      | 631-0510 |
| 5 WAY DICE | 630-0520      | 631-0520 |
| 6 WAY      | 630-0600      | 631-0600 |
| 7 WAY      | 630-0700      | 631-0700 |
| 8 WAY      | 630-0800      | 631-0800 |


**PIN VARIATIONS USED IN: 593 / 630 / 631 / 650 / 651 / 690 / 691 - DIN SOCKET CONNECTORS**

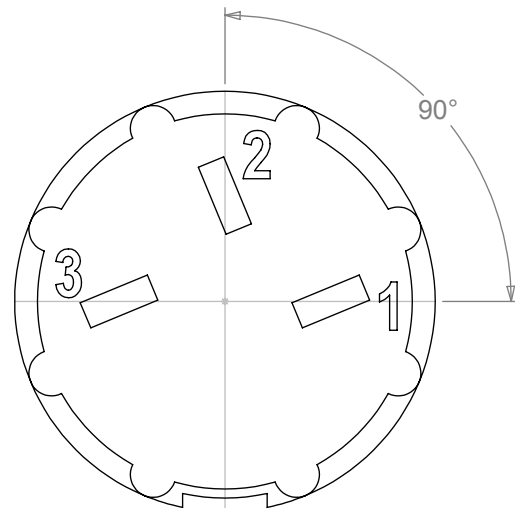


### 3 WAY

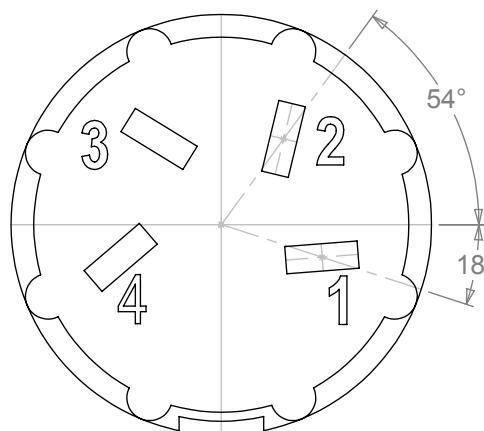


4 WAY

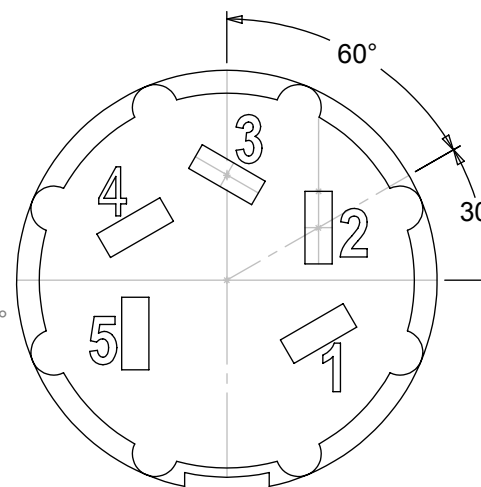


5 WAY 60°

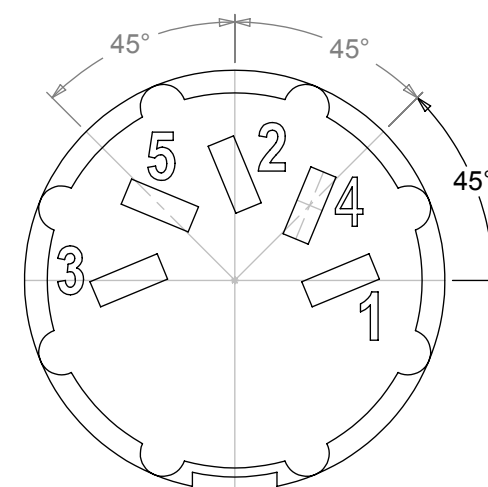


5 WAY 45°

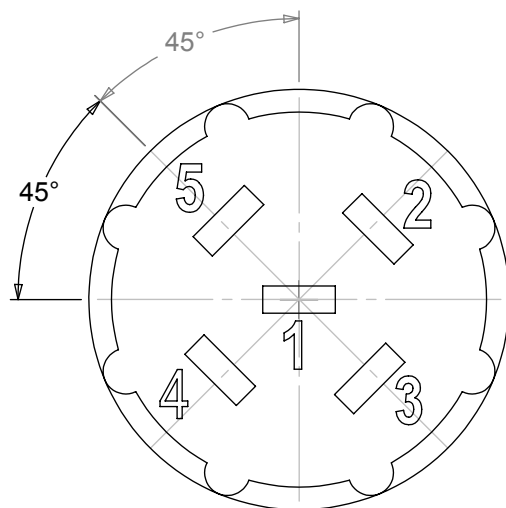


## 5 WAY DICE

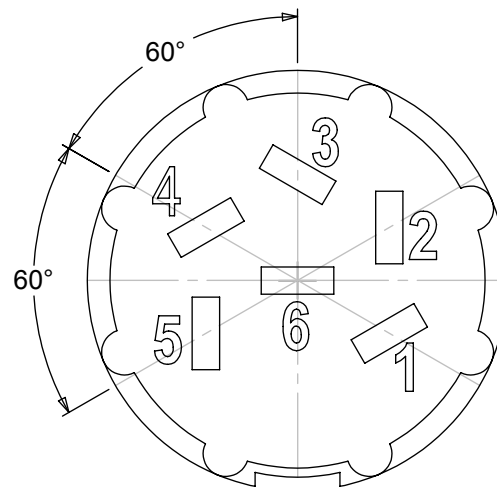

## 6 WAY

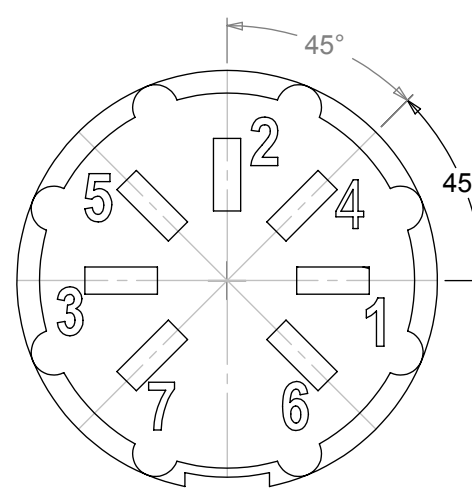

7 WAY

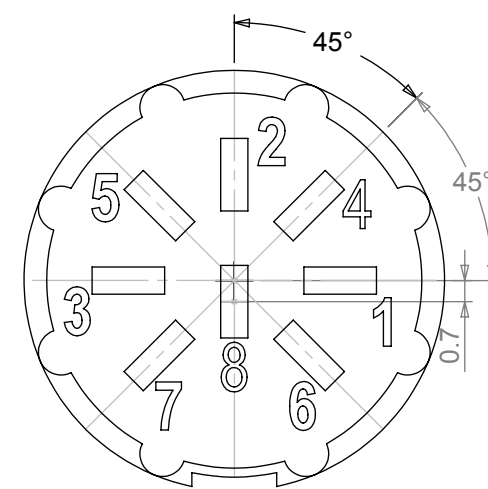

8 WAY

**MANUFACTURED TO DIN STANDARD 41524, 45322, 45326, 45327 AND 45329**