


A RANGE OF LEADS FEATURING HIGH QUALITY, LOW NOISE MICROPHONE CABLE
 THE DOUBLE LAP SCREENED CABLE IS IDEALLY SUITED TO STUDIO APPLICATIONS DUE
 TO ITS CONSTRUCTION, EACH LAP SCREENED CABLE BEING WOUND IN OPPOSITE DIRECTIONS.
 THIS FEATURE PROVIDES UNSURPASSED NOISE REJECTION YET STILL MAINTAINS
 A HIGH DEGREE OF FLEXIBILITY


DIMENSIONS

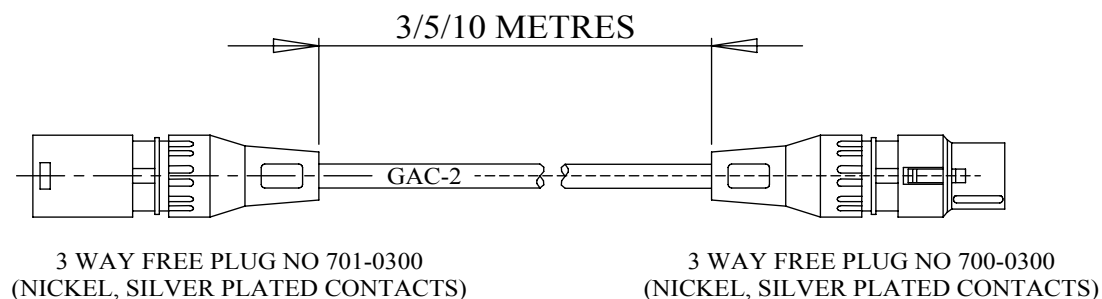

3 WAY FREE PLUG
 AS PER PRODUCTION SPECIFICATION 701-705
 SATIN NICKEL FINISH

3 WAY FREE SOCKET
 AS PER PRODUCTION SPECIFICATION 700-704
 SATIN NICKEL FINISH

CABLE GAC-2
 AS PER PRODUCTION SPECIFICATION - 439 SERIES
 RATED VOLTAGE 50V



NOTE: BLACK FINISH IS ALSO AVAILABLE ON REQUEST

PART No	LENGTH
730-0030	3 M
730-0050	5 M
730-0100	10 M