



REV.	CNN	CNN DESCRIPTION	Date	Check in
03	-	Text update	18/11/2013	Shaun Barron
04	-	Text update	12/05/2015	Shaun Barron

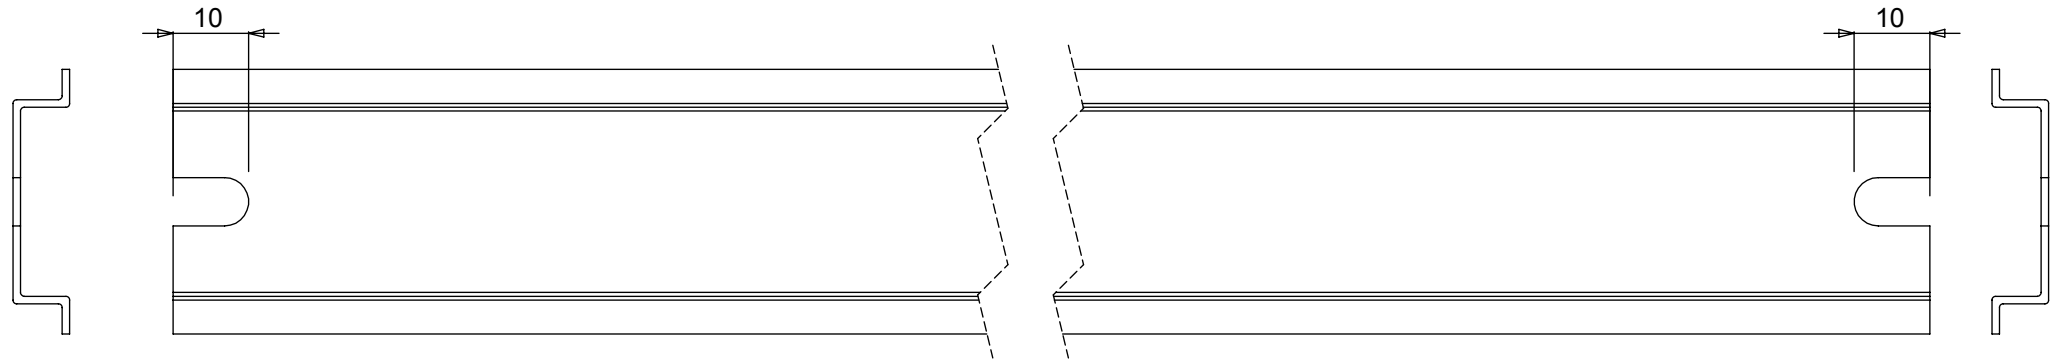

HD DIN Rail Specification

Enclosure part number	TS 35 Order Code	TS 15 Order Code	Din Rail Cut Length	Screws
4**-121208	4DR3512	4DR1512	109mm	M4
4**-121209				
4**-130806	4DR3513	4DR1513	114mm	
4**-161609	4DR3516	4DR1516	141mm	
4**-221208	4DR3522	4DR1522	204mm	
4**-221209				
4**-261609	4DR3526	4DR1526	244mm	M6
4**-261612				

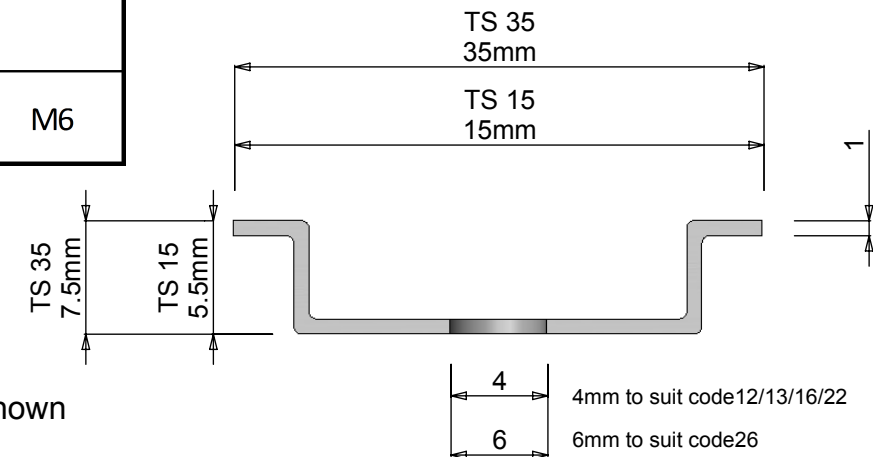

Material: Galvanised, Steel & Passivated

TS 35 x 7.5: short-circuit strength corresponds to E-Cu wire @ 16mm²

TS 15 x 5.5: short-circuit strength corresponds to E-Cu wire @ 10mm²

All DIN Rail kits will be supplied with 2 x Copper plated fixing screws thread dim shown

Tel No. +44(0)1724 273200 Website www.dem-uk.com



PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF
ALPHA 3 MANUFACTURING.
ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF
ALPHA 3 MANUFACTURING IS PROHIBITED.

DEM Manufacturing, Deltron Emcon House
Hargreaves Way, Sawcliffe Ind. Park,
Scunthorpe, North Lincolnshire, DN15 8RF, UK

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETRES.
TOLERANCE:
NO DECIMAL PLACES ±0.2mm
1 DECIMAL PLACE ±0.1mm
2 DECIMAL PLACES ±0.05mm
ANGULAR TOLERANCE: ±1°

FINISH -
DEBURR AND BREAK SHARP EDGES -
THIRD ANGLE PROJECTION
IF IN DOUBT ASK
DO NOT SCALE DRAWING
MATERIAL -

DRAWN BY SPB
APPROVED BY WC
SHEET 1 OF 1
SCALE 1:1
A4

TITLE
**Heavy duty
DIN Rail Range**
DRAWING NO.
HD Din Rail
ISSUE
04
Release