


AN INSULATED 4mm SOCKET, FOR DIRECT MOUNTING ONTO A PRINTED CIRCUIT BOARDS.  
GROOVES IN THE OUTER ACETAL HOUSING PROVIDE STACKING ALIGNMENT  
FOR BOARD SPACE SAVING.

## DIMENSIONS

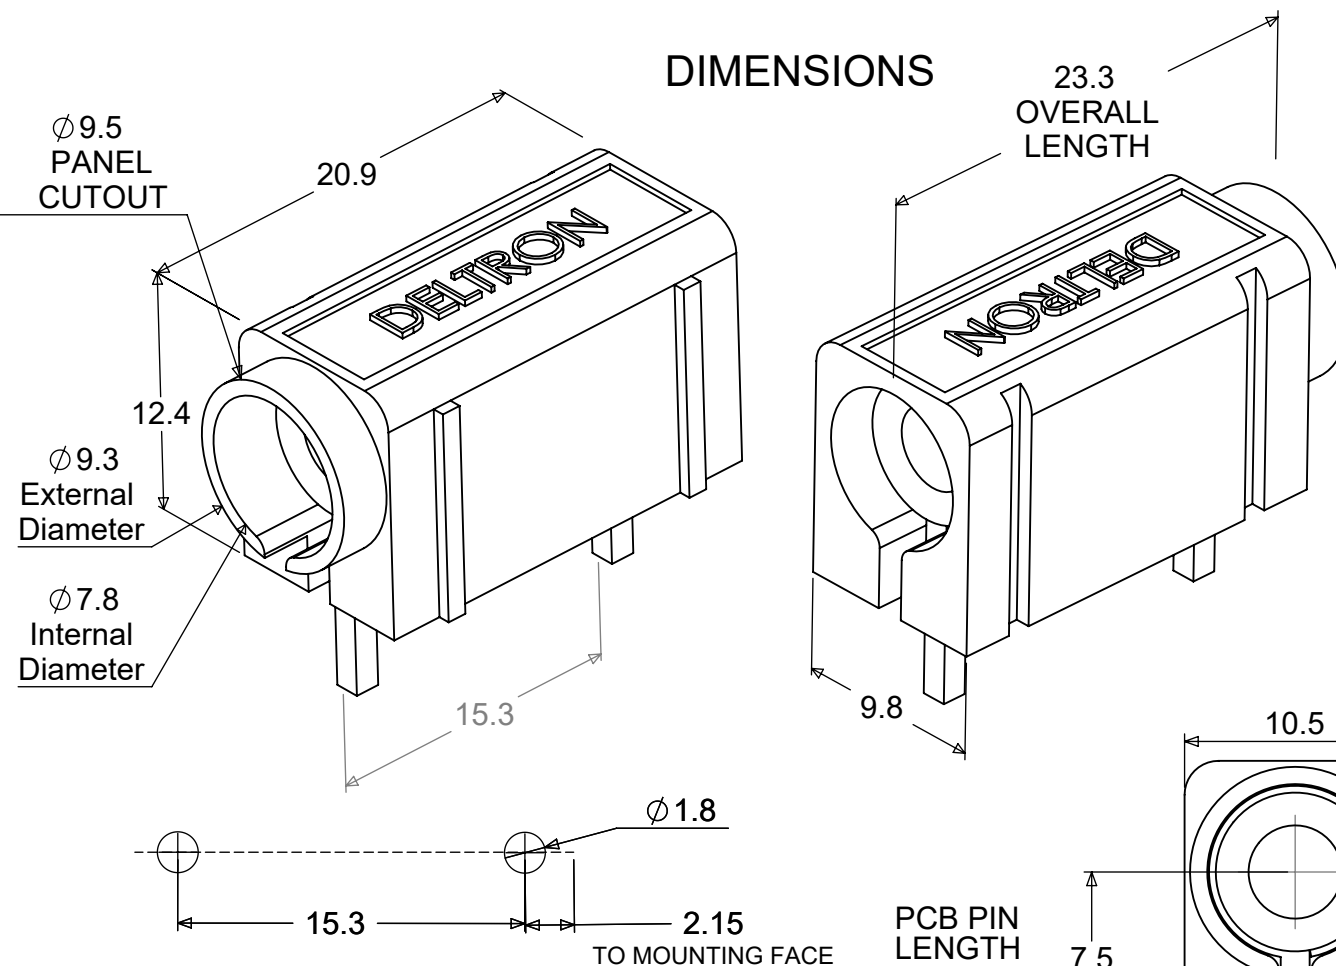


## PCB LAYOUT

Component complies with 260° deg J-STD-075  
Non-IC Electronic Components Standard  
Met PSL W4

## 90° PCB MOUNTED INSULATED SOCKET-SINGLE

PCB PIN  
LENGTH

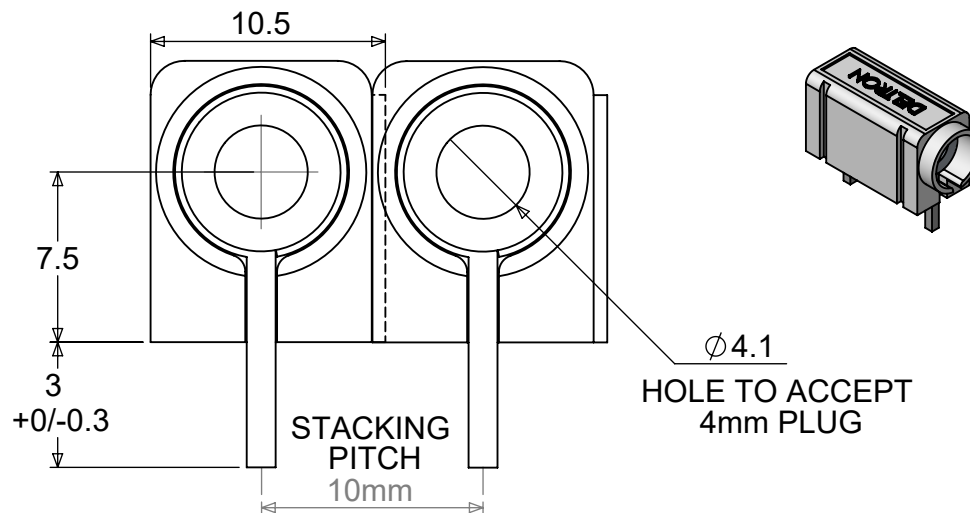

Insulant	Acetal
Pin	Brass, Silver Plate
Bush	Brass, Silver Plate
Amps	10A
Working Voltage	50V
Contact Resistance	10m $\Omega$
Maximum Temperature RTI	+ 110 °C
Minimum Temperature	- 25 °C
Recommended Temperature	10A @ 55 °C
Voltage Breakdown	5000V
Recommended Conductor Size	1.5mm <sup>2</sup>
Colours	Order Code
Black	571-0110
Blue	571-0210
Brown	571-0310
Green	571-0410
Red	571-0510
White	571-0610
Yellow	571-0710