


		2	3	4	5	6	7
	KMF350						
	AKA	n/a					
	ALTITUDE	2000m					
	CURRENT	50A 40°C					
A	CLASS	Class I					
	DEVICE	rfi filter					
	EARTHING	M6x20 stud 4Nm					
	ENCLOSURE	aluminium 1.2mm					
	ENVIRONMENT	-25/+85/21					
	FLAMMABILITY	UL94 V-2 min					
	GND BOND	25A 50/60Hz					
	HUMIDITY	93% RH non-condensing					
	INSULATION	500Vdc ≥3.5MR					
	IP RATING	IP20					
B	LOSS	7W/ph					
	LEAKAGE	2mA operating					
	MASS	2.7kg					
	MATERIAL	Group IIIa					
	MOUNTING	M6 4.5Nm					
	MTBF	22yrs (MIL-HDBK-217F)					
	OVERLOAD	150% 60s					
	OVERVOLTAGE	Category II					
	PACKAGING	ASTM D7386					
	PCB	FR4 ZPMV2 105°C					
C	POLLUTION	Degree II					
	POTTING	air					
	POWER	41.5kW(12kW)					
	RESIDUAL	463V 5s					
	RESISTANCE	2.8mR/ph					
	SCCR	10kA (200kA when fused)					
	SHOCK	15g 11ms					
	SPACING	≥50mm ventilated surfaces					
	STYLE	terminal filter					
	SUPPLY	3P 50/60Hz					
D	TERMINAL	screw 1.5-10mm² 1.9Nm 12mm str					
	VARIATOR	n/a					
	VIBRATION	5-55Hz 350µm 55-500Hz 2G					
	VOLTAGE	400/480V (520V max)					
	WITHSTAND	2900Vdc 60s					
	EU/UK	CE/UKCA					
	US	uR					
	CAN	cUR					
	OTHER						
E							



A1: 50/50Ω ASYMMETRICAL (COMMON)

A2: 50/50Ω SYMMETRICAL (DIFFERENTIAL)

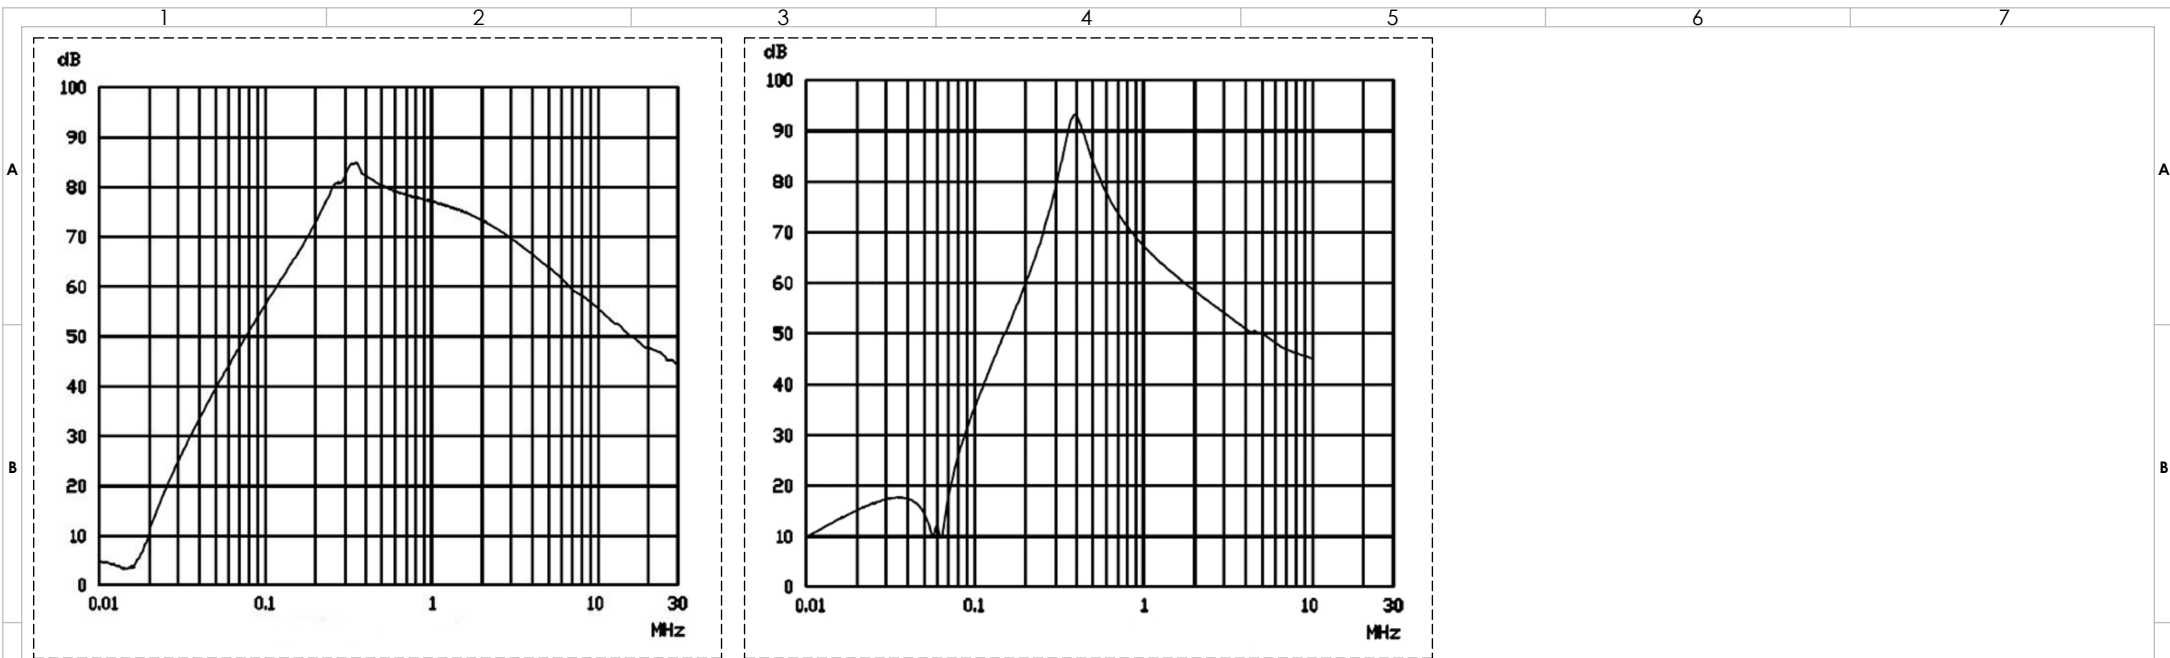

B: 50/50Ω ASYMMETRICAL (COMMON) LINE Y-CAP/CLIP REMOVED

C: 50/50Ω ASYMMETRICAL (COMMON) LOAD Y-CAP/CLIP REMOVED

D: 50/50Ω ASYMMETRICAL (COMMON) Y-CAPS/CLIPS REMOVED