

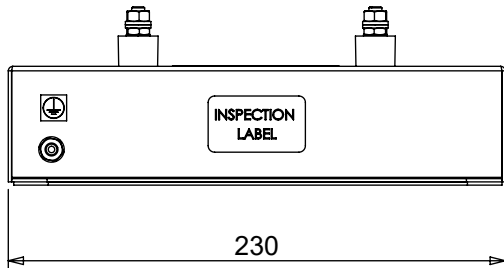
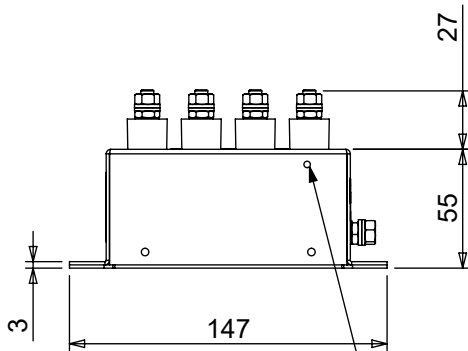
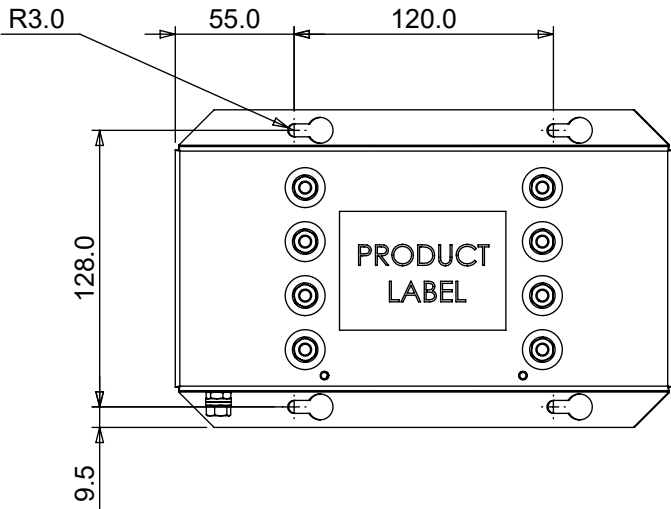


	1	2	3	4	5	6	7
	IHF425						
	AKA	n/a					
	ALTITUDE	2000m					
	CURRENT	25A 40°C					
A	CLASS	Class I					
	DEVICE	rfi filter					
	EARTHING	M6x13 stud 4Nm					
	ENCLOSURE	aluminium 1.2mm					
	ENVIRONMENT	-25/+85/21					
	FLAMMABILITY	UL94 V-2 min					
	GND BOND	25A 50/60Hz					
	HUMIDITY	93% RH non-condensing					
	INSULATION	500Vdc ≥3.5MR					
	IP RATING	IP00					
B	LOSS	2.5W/ph					
	LEAKAGE	1.9mA operating					
	MASS	2.7kg					
	MATERIAL	Group II Ia					
	MOUNTING	M5 2Nm					
	MTBF	22yrs (MIL-HDBK-217F)					
	OVERLOAD	150% 60s					
	OVERVOLTAGE	Category II					
	PACKAGING	ASTM D7386					
	PCB	FR4 ZPMV2 105°C					
C	POLLUTION	Degree II					
	POTTING	resin					
	POWER	20.8kW (6kW)					
	RESIDUAL	110V 5s					
	RESISTANCE	4mR/ph					
	SCCR	5kA					
	SHOCK	15g 11mS					
	SPACING	≥50mm ventilated surfaces					
	STYLE	stud filter					
	SUPPLY	3PN 50/60Hz					
D	TERMINAL	M6 stud 4Nm					
	VARISTOR	n/a					
	VIBRATION	5-55Hz 350um 55-500Hz 2G					
	VOLTAGE	400/480V (520V max)					
	WITHSTAND	2100Vdc 60s					
	EU/UK	CE/UKCA					
	US						
	CAN						
	OTHER						
E							

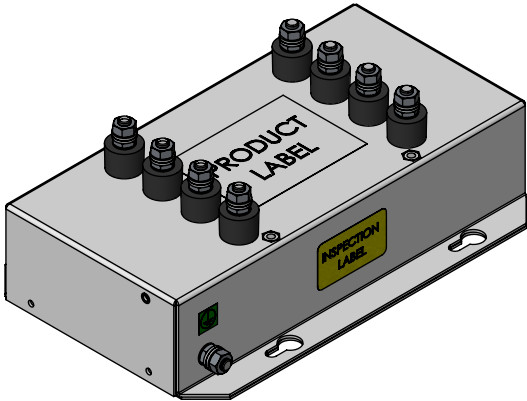

Fixing for surge
arrester (VSU4W)

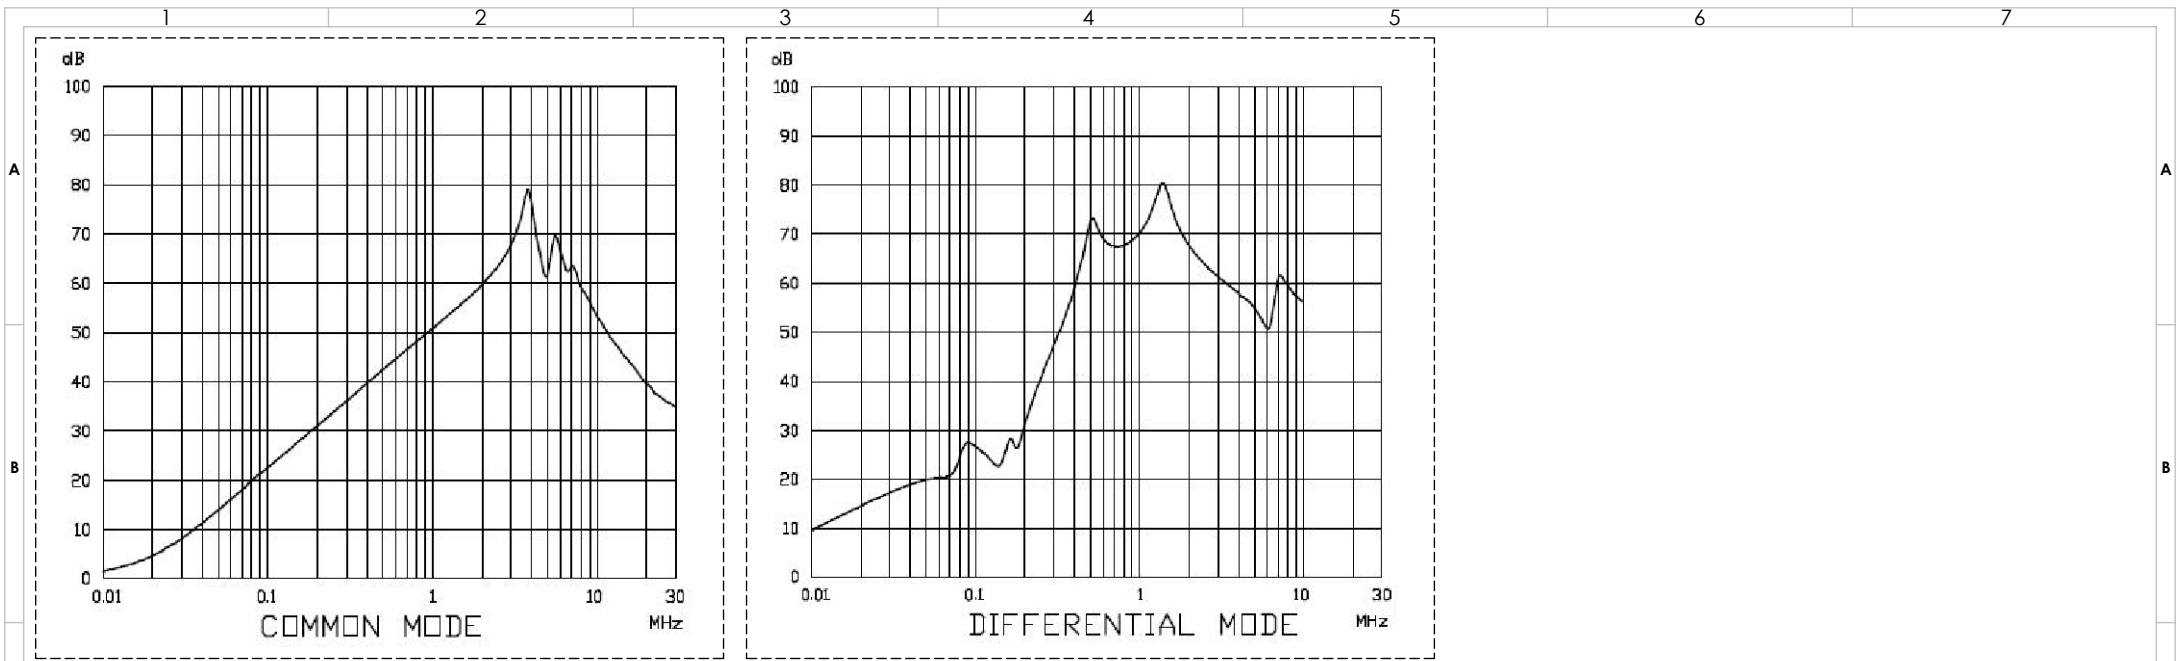

A1: 50/50Ω ASYMMETRICAL (COMMON)

A2: 50/50Ω SYMMETRICAL (DIFFERENTIAL)



B: 50/50Ω ASYMMETRICAL (COMMON) LINE Y-CAP/CLIP REMOVED

C: 50/50Ω ASYMMETRICAL (COMMON) LOAD Y-CAP/CLIP REMOVED

D: 50/50Ω ASYMMETRICAL (COMMON) Y-CAPS/CLIPS REMOVED