


A range of plugs that are available in two pin styles; hollow or solid. The plug incorporates a unique 'T' slot design which allows the interconnection between non-standard sockets. A rigid acetal cap is offered in two colours, red or black.

- Ground contact with unique 'T' shape slots for maximum contact area.
- Internal cable clamp for secure cable connection.
- Maximum cable size 4.1 mm.
- Two colours available, black or red.

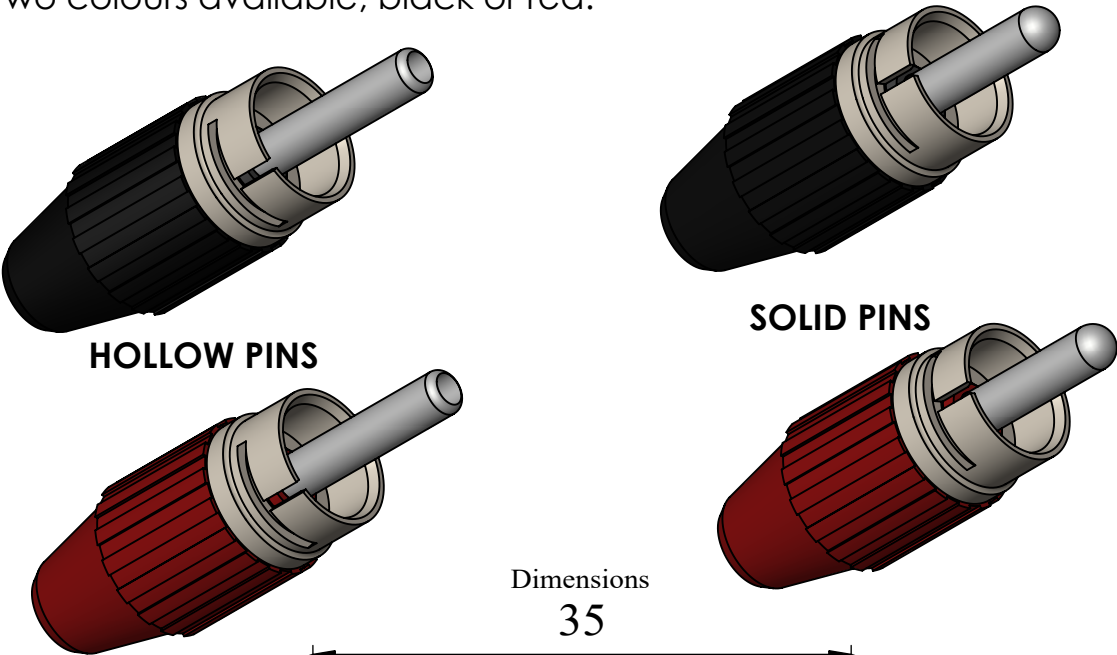

MATERIAL	FINISH
CENTRE CONTACT	BRASS, SILVER PLATED
GROUND CONTACT	BRASS, NICKEL PLATED
INSULATION	NORYL, SE1 UL94 V-1
CABLE CLAMP	BRASS, SILVER PLATED
SPRING	BRASS, NICKEL PLATED
BODY	BRASS, NICKEL PLATED
CAP	ACETAL UL94 HB
ELECTRICAL	
CURRENT	5 AMPS
RATED VOLTAGE	50 VOLTS
INSULATION RESISTANCE	100M $\Omega$ at 50 Vdc

PART No	BLACK	RED
HOLLOW PIN	413-0100	413-0500
SOLID PIN	415-0100	415-0500

