

JOAT - Jack of all Tags

A how-to guide for tagging webbing, anchors, harnesses, and other hard-to-tag items.



Where to apply

Good for use on round slings, anchors, gear loops, and webbing that is not more than 27mm wide.

How to apply


- Bend the tag and ensure it fits well before securing. Check it won't interfere with the equipment's use, or constrict any webbing
- Use pliers to squeeze the tag ends together until it clicks together



✓ Anchors



✓ 1" / 25 mm Webbing

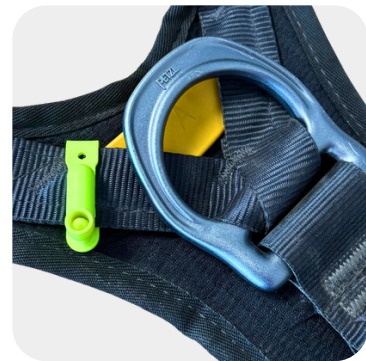

✓ Harnesses

- Do**
- Use on webbing up to 27mm wide
 - Use when you want tags to be easily visible
 - Use on hard-to-tag items
 - Use on gear loops
 - Use on wire strops

- Don't**
- Use on webbing that is too wide for the tag and needs to cinch up to fit
 - Force tag onto an area that is too thick where the tag won't close and will therefore fall off
 - Pierce the webbing

This tag works well on equipment like:

Petzl Anneau, Top Croll; Edelrid X-tube; tubular webbing, anchor eye bolts, gear bags, tool bags,

