

GDS FLOAT-AWAY TILT DOOR




Applications – Showrooms, Hospitality, Commercial, Industrial, Garages Etc.

Features

- Steel or Alum RHS welded frame construction
- Powdercoat finish
- Unlimited cladding options
- Headroom 300mm minimum
- Steel Self-supporting structure
- Counter weight operation
- 1 or 3 phase operator
- Perimeter seals
- Remote control options
- No overhead tracks

GDS Float-Away Tilt Door - Specifications

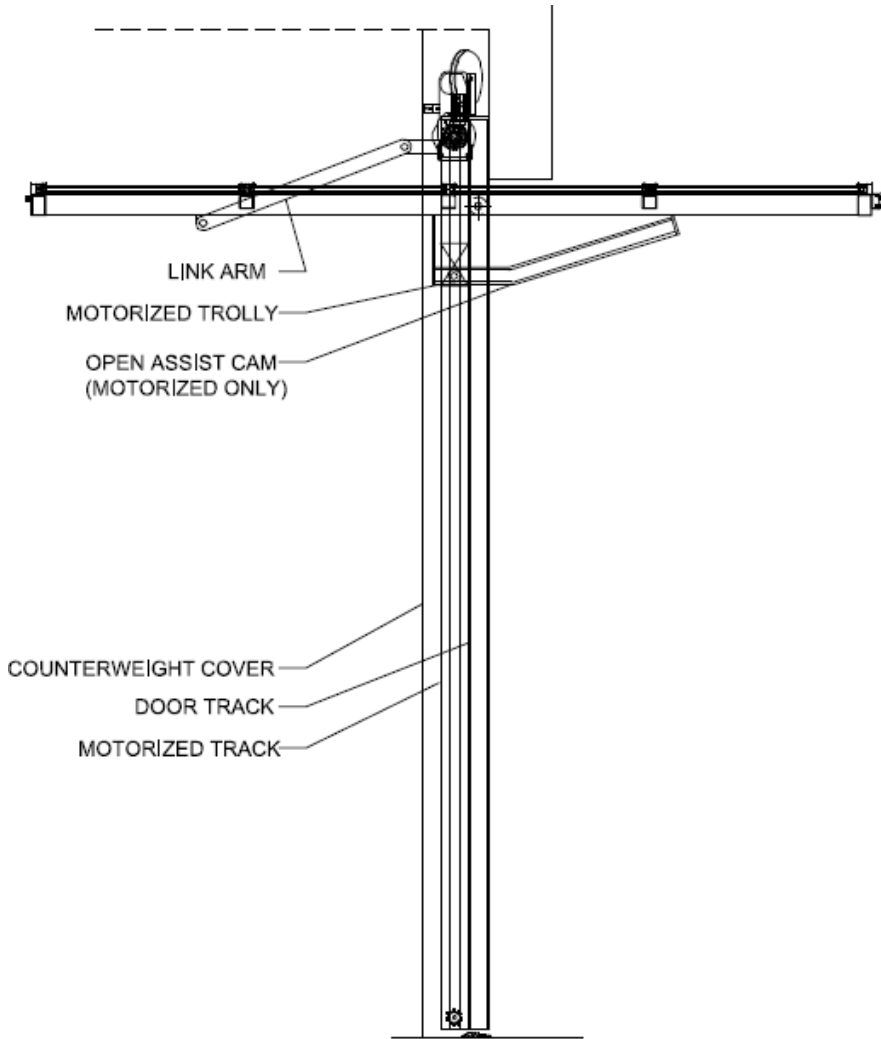

DOOR PANELS

RHS box section framing
Powdercoated finish
One complete panel – one piece

FINISH

Powdercoated finish.

CLADDING

A wide range of cladding available from glazed panels, Flat sheet, Battens, Timber etc

OPERATION

Direct drive operator with variable speed controller
1 or 3 phase operator dependent on door size and weight.
Wall controllers with options for remotes and safety beams.
Emergency release

SEALS

Perimeter seals around the door edge

Door Construction	Max Opening Size			Headroom	Side room
	Width	Height	Area		
RHS Frame panels	8.00m	4.00m	32M2	300mm +	400mm + each side

