

MODERN • LUXURIOUS • MADE IN THE USA



C A T A L O G .

2 0 2 4





TABLE OF CONTENTS .

Classic Line	001
Future Line	019
Thin Frame Deco Line	035
Wide Frame Deco Line	051
Bright Line	067
Anti-Ligature Mirrors	069
Custom Mirrors	071
Accessories	075
How to Find Us	079



CLASSIC LINE .

Straight Edge & Frost



MADE IN THE USA.

CLASSIC LINE.

Straight Edge & Frost



L01B



L01D



L02I



L02D



L03B



L03D



L04I



L04D



L05I



L06I



L06D



L07B



L07D



L08I



L08D



L09B



L09D



L10I



L10D



L11B



L11D



L21I



L51I



2700K

3000K

3500K

4000K

5000K

6000K

ITEM CODE CONFIGURATION

Sample Item Code

L 0 1 B 2 4 4 8 H 3 0 N 1 N A
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨



① Types

- L - Classic Line

② Styles

- 01 - Full Frame Inset Frost

③ Lighting Styles

- D - Direct Light
- B - Direct & Indirect Light

④ Standard Sizes

- 1836-18"x36"
 - 2436-24"x36"
 - 2448-24"x48"
 - 2460-24"x60"
 - 3042-30"x42"
 - 3048-30"x48"
 - 3060-30"x60"
 - 3072-30"x72"
 - 3232-32"x32"
 - 3636-36"x36"
 - 3642-36"x42"
 - 3648-36"x48"
 - 3660-36"x60"
 - 3672-36"x72"
 - 4242-42"x42"
 - 4254-42"x54"
 - 4260-42"x60"
 - 4284-42"x84"
 - Custom 3173-31.4"x72.5"
- (Specify the accurate size in additional custom specification notes)

⑤ Outputs

- S - Standard Output
(550 lumens/ft; 4.5 watts/ft)
- H - High Output
(750 lumens/ft; 6 watts/ft)

⑥ LED CCT (All CRI 90+)

- 27 - 2700k
- 30 - 3000k
- 35 - 3500k
- 40 - 4000k
- 50 - 5000k
- 00 - Color Switchable
(Only available with high output with touch sensor accessory or MTS)

⑦ Drivers

- V - 120-277VAC 0-10 Dimmable
- E - 120-277VAC ELV Dimmable
- N - 120-277VAC Non Dimming
(Mirrors with touch sensors have to use a non-dimming driver)

⑧ Mounting

- 1 - Vertical
- 2 - Horizontal

⑨ Accessories

- NA - None
- TS - Touch Sensor
- AN - Anti-fog & Night Light
- AF - Anti-fog
- NL - Night Light
- AL - Anti-fog, Night Light, Touch Sensor
- AT - Anti-fog & Touch Sensor
- NT - Night Light & Touch Sensor
- TR - Matrix Touch System

Additional Custom Specification

- Low-Iron Glasses
- Bluetooth Speakers
- DIY Touch Sensor Icons
- Powder Coated Chassis
- Antimicrobial Powder Coat
- Custom Inset & Frosting Sizes (Up to 2" for direct light styles)



2700K

3000K

3500K

4000K

5000K

6000K

ITEM CODE CONFIGURATION

Sample Item Code

L 0 2 D 3 6 4 8 H 0 0 N 1 T S
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨



① Types

- L - Classic Line

② Styles

- 02 - Full Frame Edge Frost

③ Lighting Styles

- D - Direct Light
- I - Indirect Light

④ Standard Sizes

- 1836-18"x36"
- 2436-24"x36"
- 2448-24"x48"
- 2460-24"x60"
- 3042-30"x42"
- 3048-30"x48"
- 3060-30"x60"
- 3072-30"x72"
- 3232-32"x32"
- 3636-36"x36"
- 3642-36"x42"
- 3648-36"x48"
- 3660-36"x60"
- 3672-36"x72"
- 4242-42"x42"
- 4254-42"x54"
- 4260-42"x60"
- 4284-42"x84"
- Custom 3173-31.4"x72.5"

(Specify the accurate size in additional custom specification notes)

⑤ Outputs

- S - Standard Output (550 lumens/ft; 4.5 watts/ft)
- H - High Output (750 lumens/ft; 6 watts/ft)

⑥ LED CCT (All CRI 90+)

- 27 - 2700k
- 30 - 3000k
- 35 - 3500k
- 40 - 4000k
- 50 - 5000k
- 00 - Color Switchable (Only available with high output with touch sensor accessory or MTS)

⑦ Drivers

- V - 120-277VAC 0-10 Dimmable
- E - 120-277VAC ELV Dimmable
- N - 120-277VAC Non Dimming (Mirrors with touch sensors have to use a non-dimming driver)

⑧ Mounting

- 1 - Vertical
- 2 - Horizontal

⑨ Accessories

- NA - None
- TS - Touch Sensor
- AN - Anti-fog & Night Light
- AF - Anti-fog
- NL - Night Light
- AL - Anti-fog, Night Light, Touch Sensor
- AT - Anti-fog & Touch Sensor
- NT - Night Light & Touch Sensor
- TR - Matrix Touch System

Additional Custom Specification

- Low-Iron Glasses
- Bluetooth Speakers
- DIY Touch Sensor Icons
- Powder Coated Chassis
- Antimicrobial Powder Coat
- Custom Inset & Frosting Sizes (Up to 2" for direct light styles)



2700K

3000K

3500K

4000K

5000K

6000K

ITEM CODE CONFIGURATION

Sample Item Code

L 03 D 3648 H 40 N 1 T R

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨



① Types

- L - Classic Line

② Styles

- 03 - Double Long Side Inset Frost

③ Lighting Styles

- D - Direct Light
- B - Direct & Indirect Light

④ Standard Sizes

- 1836-18"x36"
- 2436-24"x36"
- 2448-24"x48"
- 2460-24"x60"
- 3042-30"x42"
- 3048-30"x48"
- 3060-30"x60"
- 3072-30"x72"
- 3232-32"x32"
- 3636-36"x36"
- 3642-36"x42"
- 3648-36"x48"
- 3660-36"x60"
- 3672-36"x72"
- 4242-42"x42"
- 4254-42"x54"
- 4260-42"x60"
- 4284-42"x84"
- Custom 3173-31.4"x72.5"

(Specify the accurate size in additional custom specification notes)

⑤ Outputs

- S - Standard Output (550 lumens/ft; 4.5 watts/ft)
- H - High Output (750 lumens/ft; 6 watts/ft)

⑥ LED CCT (All CRI 90+)

- 27 - 2700k
- 30 - 3000k
- 35 - 3500k
- 40 - 4000k
- 50 - 5000k
- 00 - Color Switchable (Only available with high output with touch sensor accessory or MTS)

⑦ Drivers

- V - 120-277VAC 0-10 Dimmable
- E - 120-277VAC ELV Dimmable
- N - 120-277VAC Non Dimming (Mirrors with touch sensors have to use a non-dimming driver)

⑧ Mounting

- 1 - Vertical
- 2 - Horizontal

⑨ Accessories

- NA - None
- TS - Touch Sensor
- AN - Anti-fog & Night Light
- AF - Anti-fog
- NL - Night Light
- AL - Anti-fog, Night Light, Touch Sensor
- AT - Anti-fog & Touch Sensor
- NT - Night Light & Touch Sensor
- TR - Matrix Touch System

Additional Custom Specification

- Low-Iron Glasses
- Bluetooth Speakers
- DIY Touch Sensor Icons
- Powder Coated Chassis
- Antimicrobial Powder Coat
- Custom Inset & Frosting Sizes (Up to 2" for direct light styles)



2700K

3000K

3500K

4000K

5000K

6000K

ITEM CODE CONFIGURATION

Sample Item Code

L 0 4 I 4 0 9 8 H 3 0 E 2 N A
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨



① Types

- L - Classic Line

② Styles

- 04 - Double Long Side Edge Frost

③ Lighting Styles

- D - Direct Light
- I - Indirect Light

④ Standard Sizes

- 1836-18"x36"
- 2436-24"x36"
- 2448-24"x48"
- 2460-24"x60"
- 3042-30"x42"
- 3048-30"x48"
- 3060-30"x60"
- 3072-30"x72"
- 3232-32"x32"
- 3636-36"x36"
- 3642-36"x42"
- 3648-36"x48"
- 3660-36"x60"
- 3672-36"x72"
- 4242-42"x42"
- 4254-42"x54"
- 4260-42"x60"
- 4284-42"x84"
- Custom 3173-31.4"x72.5"

(Specify the accurate size in additional custom specification notes)

⑤ Outputs

- S - Standard Output
(550 lumens/ft; 4.5 watts/ft)
- H - High Output
(750 lumens/ft; 6 watts/ft)

⑥ LED CCT (All CRI 90+)

- 27 - 2700k
- 30 - 3000k
- 35 - 3500k
- 40 - 4000k
- 50 - 5000k
- 00 - Color Switchable
(Only available with high output with touch sensor accessory or MTS)

⑦ Drivers

- V - 120-277VAC 0-10 Dimmable
- E - 120-277VAC ELV Dimmable
- N - 120-277VAC Non Dimming
(Mirrors with touch sensors have to use a non-dimming driver)

⑧ Mounting


- 1 - Vertical
- 2 - Horizontal

⑨ Accessories

- NA - None
- TS - Touch Sensor
- AN - Anti-fog & Night Light
- AF - Anti-fog
- NL - Night Light
- AL - Anti-fog, Night Light, Touch Sensor
- AT - Anti-fog & Touch Sensor
- NT - Night Light & Touch Sensor
- TR - Matrix Touch System

Additional Custom Specification

- Low-Iron Glasses
- Bluetooth Speakers
- DIY Touch Sensor Icons
- Powder Coated Chassis
- Antimicrobial Powder Coat
- Custom Inset & Frosting Sizes (Up to 2" for direct light styles)

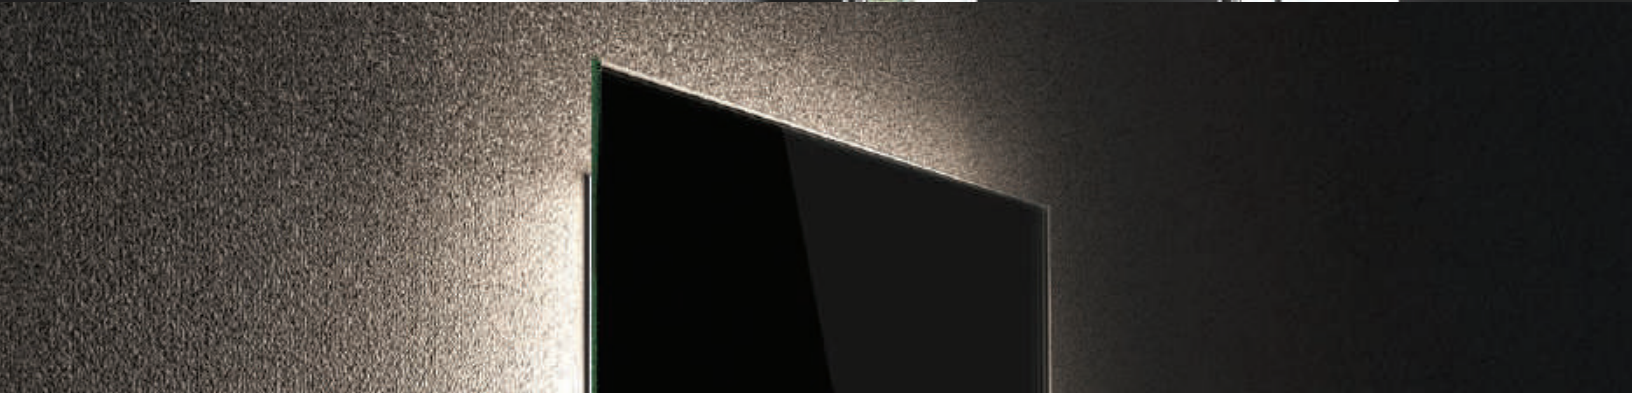

2700K

3000K

3500K

4000K

5000K

6000K

ITEM CODE CONFIGURATION

Sample Item Code

L 0 5 I 3 0 4 2 H 4 0 N 1 N A
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨



① Types

- L - Classic Line

② Styles

- 05 - No Frost, All Sides Illumination

③ Lighting Styles

- I - Indirect Light

④ Standard Sizes

- 1836-18"x36"
- 2436-24"x36"
- 2448-24"x48"
- 2460-24"x60"
- 3042-30"x42"
- 3048-30"x48"
- 3060-30"x60"
- 3072-30"x72"
- 3232-32"x32"
- 3636-36"x36"
- 3642-36"x42"
- 3648-36"x48"
- 3660-36"x60"
- 3672-36"x72"
- 4242-42"x42"
- 4254-42"x54"
- 4260-42"x60"
- 4284-42"x84"
- Custom 3173-31.4"x72.5"

(Specify the accurate size in additional custom specification notes)

⑤ Outputs

- S - Standard Output (550 lumens/ft; 4.5 watts/ft)
- H - High Output (750 lumens/ft; 6 watts/ft)

⑥ LED CCT (All CRI 90+)

- 27 - 2700k
- 30 - 3000k
- 35 - 3500k
- 40 - 4000k
- 50 - 5000k
- 00 - Color Switchable (Only available with high output with touch sensor accessory or MTS)

⑦ Drivers

- V - 120-277VAC 0-10 Dimmable
- E - 120-277VAC ELV Dimmable
- N - 120-277VAC Non Dimming (Mirrors with touch sensors have to use a non-dimming driver)

⑧ Mounting


- 1 - Vertical
- 2 - Horizontal

⑨ Accessories

- NA - None
- TS - Touch Sensor
- AN - Anti-fog & Night Light
- AF - Anti-fog
- NL - Night Light
- AL - Anti-fog, Night Light, Touch Sensor
- AT - Anti-fog & Touch Sensor
- NT - Night Light & Touch Sensor
- TR - Matrix Touch System

Additional Custom Specification

- Low-Iron Glasses
- Bluetooth Speakers
- DIY Touch Sensor Icons
- Powder Coated Chassis
- Antimicrobial Powder Coat
- Custom Inset & Frosting Sizes (Up to 2" for direct light styles)

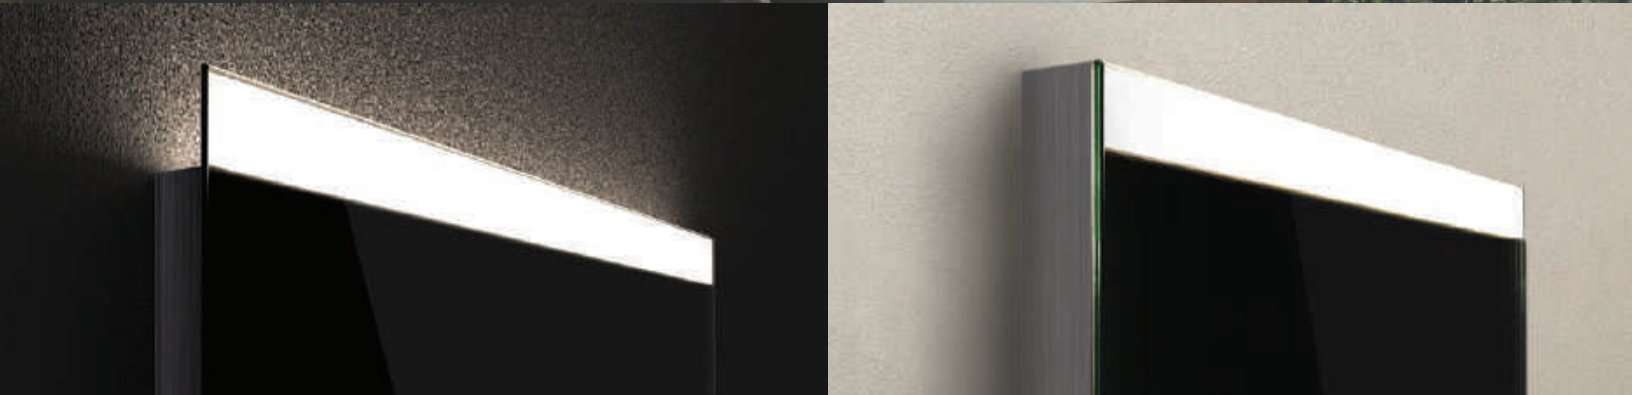

2700K

3000K

3500K

4000K

5000K

6000K

ITEM CODE CONFIGURATION

Sample Item Code

L 0 6 I 2 4 6 0 H 4 0 N 1 N A
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨



① Types

- L - Classic Line

② Styles

- 06 - Double Short Side Edge Frost

③ Lighting Styles

- D - Direct Light
- I - Indirect Light

④ Standard Sizes

- 1836-18"x36"
- 2436-24"x36"
- 2448-24"x48"
- 2460-24"x60"
- 3042-30"x42"
- 3048-30"x48"
- 3060-30"x60"
- 3072-30"x72"
- 3232-32"x32"
- 3636-36"x36"
- 3642-36"x42"
- 3648-36"x48"
- 3660-36"x60"
- 3672-36"x72"
- 4242-42"x42"
- 4254-42"x54"
- 4260-42"x60"
- 4284-42"x84"
- Custom 3173-31.4"x72.5"

(Specify the accurate size in additional custom specification notes)

⑤ Outputs

- S - Standard Output
(550 lumens/ft; 4.5 watts/ft)
- H - High Output
(750 lumens/ft; 6 watts/ft)

⑥ LED CCT (All CRI 90+)

- 27 - 2700k
- 30 - 3000k
- 35 - 3500k
- 40 - 4000k
- 50 - 5000k
- 00 - Color Switchable
(Only available with high output with touch sensor accessory or MTS)

⑦ Drivers

- V - 120-277VAC 0-10 Dimmable
- E - 120-277VAC ELV Dimmable
- N - 120-277VAC Non Dimming
(Mirrors with touch sensors have to use a non-dimming driver)

⑧ Mounting

- 1 - Vertical
- 2 - Horizontal

⑨ Accessories

- NA - None
- TS - Touch Sensor
- AN - Anti-fog & Night Light
- AF - Anti-fog
- NL - Night Light
- AL - Anti-fog, Night Light, Touch Sensor
- AT - Anti-fog & Touch Sensor
- NT - Night Light & Touch Sensor
- TR - Matrix Touch System

Additional Custom Specification

- Low-Iron Glasses
- Bluetooth Speakers
- DIY Touch Sensor Icons
- Powder Coated Chassis
- Antimicrobial Powder Coat
- Custom Inset & Frosting Sizes (Up to 2" for direct light styles)



2700K

3000K

3500K

4000K

5000K

6000K

ITEM CODE CONFIGURATION

Sample Item Code

L 07 B 2448 H 00 N 1 T S
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨



① Types

- L - Classic Line

② Styles

- 07 - Double Short Side Inset Frost

③ Lighting Styles

- D - Direct Light
- B - Direct & Indirect Light

④ Standard Sizes

- 1836-18"x36"
- 2436-24"x36"
- 2448-24"x48"
- 2460-24"x60"
- 3042-30"x42"
- 3048-30"x48"
- 3060-30"x60"
- 3072-30"x72"
- 3232-32"x32"
- 3636-36"x36"
- 3642-36"x42"
- 3648-36"x48"
- 3660-36"x60"
- 3672-36"x72"
- 4242-42"x42"
- 4254-42"x54"
- 4260-42"x60"
- 4284-42"x84"
- Custom 3173-31.4"x72.5"

(Specify the accurate size in additional custom specification notes)

⑤ Outputs

- S - Standard Output (550 lumens/ft; 4.5 watts/ft)
- H - High Output (750 lumens/ft; 6 watts/ft)

⑥ LED CCT (All CRI 90+)

- 27 - 2700k
- 30 - 3000k
- 35 - 3500k
- 40 - 4000k
- 50 - 5000k
- 00 - Color Switchable (Only available with high output with touch sensor accessory or MTS)

⑦ Drivers

- V - 120-277VAC 0-10 Dimmable
- E - 120-277VAC ELV Dimmable
- N - 120-277VAC Non Dimming (Mirrors with touch sensors have to use a non-dimming driver)

⑧ Mounting


- 1 - Vertical
- 2 - Horizontal

⑨ Accessories

- NA - None
- TS - Touch Sensor
- AN - Anti-fog & Night Light
- AF - Anti-fog
- NL - Night Light
- AL - Anti-fog, Night Light, Touch Sensor
- AT - Anti-fog & Touch Sensor
- NT - Night Light & Touch Sensor
- TR - Matrix Touch System

Additional Custom Specification

- Low-Iron Glasses
- Bluetooth Speakers
- DIY Touch Sensor Icons
- Powder Coated Chassis
- Antimicrobial Powder Coat
- Custom Inset & Frosting Sizes (Up to 2" for direct light styles)

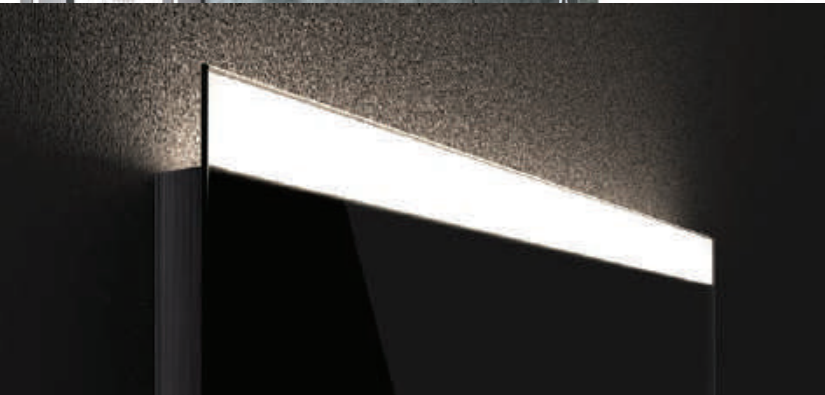

2700K

3000K

3500K

4000K

5000K

6000K

ITEM CODE CONFIGURATION

Sample Item Code

L 0 8 I 4 2 6 0 H 3 0 N 1 N A
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨



① Types

- L - Classic Line

② Styles

- 08 - Single Long Side Edge Frost

③ Lighting Styles

- D - Direct Light
- I - Indirect Light

④ Standard Sizes

- 1836-18"x36"
- 2436-24"x36"
- 2448-24"x48"
- 2460-24"x60"
- 3042-30"x42"
- 3048-30"x48"
- 3060-30"x60"
- 3072-30"x72"
- 3232-32"x32"
- 3636-36"x36"
- 3642-36"x42"
- 3648-36"x48"
- 3660-36"x60"
- 3672-36"x72"
- 4242-42"x42"
- 4254-42"x54"
- 4260-42"x60"
- 4284-42"x84"
- Custom 3173-31.4"x72.5"

(Specify the accurate size in additional custom specification notes)

⑤ Outputs

- S - Standard Output
(550 lumens/ft; 4.5 watts/ft)
- H - High Output
(750 lumens/ft; 6 watts/ft)

⑥ LED CCT (All CRI 90+)

- 27 - 2700k
- 30 - 3000k
- 35 - 3500k
- 40 - 4000k
- 50 - 5000k
- 00 - Color Switchable
(Only available with high output with touch sensor accessory or MTS)

⑦ Drivers

- V - 120-277VAC 0-10 Dimmable
- E - 120-277VAC ELV Dimmable
- N - 120-277VAC Non Dimming
(Mirrors with touch sensors have to use a non-dimming driver)

⑧ Mounting

- 1 - Vertical
- 2 - Horizontal

⑨ Accessories

- NA - None
- TS - Touch Sensor
- AN - Anti-fog & Night Light
- AF - Anti-fog
- NL - Night Light
- AL - Anti-fog, Night Light, Touch Sensor
- AT - Anti-fog & Touch Sensor
- NT - Night Light & Touch Sensor
- TR - Matrix Touch System

Additional Custom Specification

- Low-Iron Glasses
- Bluetooth Speakers
- DIY Touch Sensor Icons
- Powder Coated Chassis
- Antimicrobial Powder Coat
- Custom Inset & Frosting Sizes (Up to 2" for direct light styles)



2700K

3000K

3500K

4000K

5000K

6000K

ITEM CODE CONFIGURATION

Sample Item Code

L 09 B 4088 S 50 N 2 NA
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨



① Types

- L - Classic Line

② Styles

- 09 - Single Long Side Inset Frost

③ Lighting Styles

- D - Direct Light
- B - Direct & Indirect Light

④ Standard Sizes

- 1836-18"x36"
- 2436-24"x36"
- 2448-24"x48"
- 2460-24"x60"
- 3042-30"x42"
- 3048-30"x48"
- 3060-30"x60"
- 3072-30"x72"
- 3232-32"x32"
- 3636-36"x36"
- 3642-36"x42"
- 3648-36"x48"
- 3660-36"x60"
- 3672-36"x72"
- 4242-42"x42"
- 4254-42"x54"
- 4260-42"x60"
- 4284-42"x84"
- Custom 3173-31.4"x72.5"

(Specify the accurate size in additional custom specification notes)

⑤ Outputs

- S - Standard Output
(550 lumens/ft; 4.5 watts/ft)
- H - High Output
(750 lumens/ft; 6 watts/ft)

⑥ LED CCT (All CRI 90+)

- 27 - 2700k
- 30 - 3000k
- 35 - 3500k
- 40 - 4000k
- 50 - 5000k
- 00 - Color Switchable
(Only available with high output with touch sensor accessory or MTS)

⑦ Drivers

- V - 120-277VAC 0-10 Dimmable
- E - 120-277VAC ELV Dimmable
- N - 120-277VAC Non Dimming
(Mirrors with touch sensors have to use a non-dimming driver)

⑧ Mounting

- 1 - Vertical
- 2 - Horizontal

⑨ Accessories

- NA - None
- TS - Touch Sensor
- AN - Anti-fog & Night Light
- AF - Anti-fog
- NL - Night Light
- AL - Anti-fog, Night Light, Touch Sensor
- AT - Anti-fog & Touch Sensor
- NT - Night Light & Touch Sensor
- TR - Matrix Touch System

Additional Custom Specification

- Low-Iron Glasses
- Bluetooth Speakers
- DIY Touch Sensor Icons
- Powder Coated Chassis
- Antimicrobial Powder Coat
- Custom Inset & Frosting Sizes (Up to 2" for direct light styles)



2700K

3000K

3500K

4000K

5000K

6000K

ITEM CODE CONFIGURATION

Sample Item Code

L 1 0 I 3 0 7 2 H 4 0 N 1 N A
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨



① Types

- L - Classic Line

② Styles

- 10 - Single Short Side Edge Frost

③ Lighting Styles

- D - Direct Light
- I - Indirect Light

④ Standard Sizes

- 1836-18"x36"
- 2436-24"x36"
- 2448-24"x48"
- 2460-24"x60"
- 3042-30"x42"
- 3048-30"x48"
- 3060-30"x60"
- 3072-30"x72"
- 3232-32"x32"
- 3636-36"x36"
- 3642-36"x42"
- 3648-36"x48"
- 3660-36"x60"
- 3672-36"x72"
- 4242-42"x42"
- 4254-42"x54"
- 4260-42"x60"
- 4284-42"x84"
- Custom 3173-31.4"x72.5"

(Specify the accurate size in additional custom specification notes)

⑤ Outputs

- S - Standard Output (550 lumens/ft; 4.5 watts/ft)
- H - High Output (750 lumens/ft; 6 watts/ft)

⑥ LED CCT (All CRI 90+)

- 27 - 2700k
- 30 - 3000k
- 35 - 3500k
- 40 - 4000k
- 50 - 5000k
- 00 - Color Switchable (Only available with high output with touch sensor accessory or MTS)

⑦ Drivers

- V - 120-277VAC 0-10 Dimmable
- E - 120-277VAC ELV Dimmable
- N - 120-277VAC Non Dimming (Mirrors with touch sensors have to use a non-dimming driver)

⑧ Mounting

- 1 - Vertical
- 2 - Horizontal

⑨ Accessories

- NA - None
- TS - Touch Sensor
- AN - Anti-fog & Night Light
- AF - Anti-fog
- NL - Night Light
- AL - Anti-fog, Night Light, Touch Sensor
- AT - Anti-fog & Touch Sensor
- NT - Night Light & Touch Sensor
- TR - Matrix Touch System

Additional Custom Specification

- Low-Iron Glasses
- Bluetooth Speakers
- DIY Touch Sensor Icons
- Powder Coated Chassis
- Antimicrobial Powder Coat
- Custom Inset & Frosting Sizes (Up to 2" for direct light styles)



2700K

3000K

3500K

4000K

5000K

6000K

ITEM CODE CONFIGURATION

Sample Item Code

L 1 1 B 3 0 4 8 S 3 0 N 1 N A
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨



① Types

- L - Classic Line

② Styles

- 11 - Single Short Side Inset Frost

③ Lighting Styles

- D - Direct Light
- B - Direct & Indirect Light

④ Standard Sizes

- 1836-18"x36"
- 2436-24"x36"
- 2448-24"x48"
- 2460-24"x60"
- 3042-30"x42"
- 3048-30"x48"
- 3060-30"x60"
- 3072-30"x72"
- 3232-32"x32"
- 3636-36"x36"
- 3642-36"x42"
- 3648-36"x48"
- 3660-36"x60"
- 3672-36"x72"
- 4242-42"x42"
- 4254-42"x54"
- 4260-42"x60"
- 4284-42"x84"
- Custom 3173-31.4"x72.5"

(Specify the accurate size in additional custom specification notes)

⑤ Outputs

- S - Standard Output
(550 lumens/ft; 4.5 watts/ft)
- H - High Output
(750 lumens/ft; 6 watts/ft)

⑥ LED CCT (All CRI 90+)

- 27 - 2700k
- 30 - 3000k
- 35 - 3500k
- 40 - 4000k
- 50 - 5000k
- 00 - Color Switchable
(Only available with high output with touch sensor accessory or MTS)

⑦ Drivers

- V - 120-277VAC 0-10 Dimmable
- E - 120-277VAC ELV Dimmable
- N - 120-277VAC Non Dimming
(Mirrors with touch sensors have to use a non-dimming driver)

⑧ Mounting

- 1 - Vertical
- 2 - Horizontal

⑨ Accessories

- NA - None
- TS - Touch Sensor
- AN - Anti-fog & Night Light
- AF - Anti-fog
- NL - Night Light
- AL - Anti-fog, Night Light, Touch Sensor
- AT - Anti-fog & Touch Sensor
- NT - Night Light & Touch Sensor
- TR - Matrix Touch System

Additional Custom Specification

- Low-Iron Glasses
- Bluetooth Speakers
- DIY Touch Sensor Icons
- Powder Coated Chassis
- Antimicrobial Powder Coat
- Custom Inset & Frosting Sizes (Up to 2" for direct light styles)



2700K

3000K

3500K

4000K

5000K

6000K

ITEM CODE CONFIGURATION

Sample Item Code

L 2 1 I 0032 S 30 N 1 NA
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨



① Types

- L - Classic Line

② Styles

- 21 - Round Full Frame Edge Frost

③ Lighting Styles

- I - Indirect Light

④ Standard Sizes

- 0032-32"
- 0036-36"
- Custom 0038-38.1" (Specify the accurate size in additional custom specification notes)

⑤ Outputs

- S - Standard Output (550 lumens/ft; 4.5 watts/ft)
- H - High Output (750 lumens/ft; 6 watts/ft)

⑥ LED CCT (All CRI 90+)

- 27 - 2700k
- 30 - 3000k
- 35 - 3500k
- 40 - 4000k
- 50 - 5000k
- 00 - Color Switchable (Only available with high output with touch sensor accessory or MTS)

⑦ Drivers

- V - 120-277VAC 0-10 Dimmable
- E - 120-277VAC ELV Dimmable
- N - 120-277VAC Non Dimming (Mirrors with touch sensors have to use a non-dimming driver)

⑧ Mounting

- 1 - Vertical
- 2 - Horizontal

⑨ Accessories

- NA - None
- TS - Touch Sensor
- AN - Anti-fog & Night Light
- AF - Anti-fog
- NL - Night Light
- AL - Anti-fog, Night Light, Touch Sensor
- AT - Anti-fog & Touch Sensor
- NT - Night Light & Touch Sensor
- TR - Matrix Touch System

Additional Custom Specification

- Low-Iron Glasses
- Bluetooth Speakers
- DIY Touch Sensor Icons
- Powder Coated Chassis
- Antimicrobial Powder Coat
- Custom Inset & Frosting Sizes (Up to 2" for direct light styles)



2700K

3000K

3500K

4000K

5000K

6000K

ITEM CODE CONFIGURATION

Sample Item Code

L 5 1 I 0032 S 30 N 1 NA
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨



① Types

- L - Classic Line

② Styles

- 51 - Round No Frost

③ Lighting Styles

- I - Indirect Light

④ Standard Sizes

- 0032-32"
- 0036-36"
- Custom 0038-38.1" (Specify the accurate size in additional custom specification notes)

⑤ Outputs

- S - Standard Output (550 lumens/ft; 4.5 watts/ft)
- H - High Output (750 lumens/ft; 6 watts/ft)

⑥ LED CCT (All CRI 90+)

- 27 - 2700k
- 30 - 3000k
- 35 - 3500k
- 40 - 4000k
- 50 - 5000k
- 00 - Color Switchable (Only available with high output with touch sensor accessory or MTS)

⑦ Drivers

- V - 120-277VAC 0-10 Dimmable
- E - 120-277VAC ELV Dimmable
- N - 120-277VAC Non Dimming (Mirrors with touch sensors have to use a non-dimming driver)

⑧ Mounting

- 1 - Vertical
- 2 - Horizontal

⑨ Accessories

- NA - None
- TS - Touch Sensor
- AN - Anti-fog & Night Light
- AF - Anti-fog
- NL - Night Light
- AL - Anti-fog, Night Light, Touch Sensor
- AT - Anti-fog & Touch Sensor
- NT - Night Light & Touch Sensor
- TR - Matrix Touch System

Additional Custom Specification

- Low-Iron Glasses
- Bluetooth Speakers
- DIY Touch Sensor Icons
- Powder Coated Chassis
- Antimicrobial Powder Coat
- Custom Inset & Frosting Sizes (Up to 2" for direct light styles)









FUTURE LINE .

Rounded Corners



MADE IN THE USA.

FUTURE LINE .
Rounded Corners





2700K

3000K

3500K

4000K

5000K

6000K

ITEM CODE CONFIGURATION

Sample Item Code

F 0 1 D 6 0 8 0 H 3 0 N 1 N A
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨



① Types

- F - Future Line

② Styles

- 01 - Full Frame Inset Frost

③ Lighting Styles

- D - Direct Light
- B - Direct & Indirect Light

④ Standard Sizes

- 2436-24"x36"
- 2448-24"x48"
- 3042-30"x42"
- 3048-30"x48"
- 3060-30"x60"
- 3648-36"x48"
- 3660-36"x60"
- 3672-36"x72"
- 4254-42"x54"
- 4284-42"x84"
- Custom 3173-31.4"x72.5"

(Specify the accurate size in additional custom specification notes)

⑤ Outputs

- S - Standard Output (550 lumens/ft; 4.5 watts/ft)
- H - High Output (750 lumens/ft; 6 watts/ft)

⑥ LED CCT (All CRI 90+)

- 27 - 2700k
- 30 - 3000k
- 35 - 3500k
- 40 - 4000k
- 50 - 5000k
- 00 - Color Switchable (Only available with high output with touch sensor accessory or MTS)

⑦ Drivers

- V - 120-277VAC 0-10 Dimmable
- E - 120-277VAC ELV Dimmable
- N - 120-277VAC Non Dimming (Mirrors with touch sensors have to use a non-dimming driver)

⑧ Mounting

- 1 - Vertical
- 2 - Horizontal

⑨ Accessories

- NA - None
- TS - Touch Sensor
- AN - Anti-fog & Night Light
- AF - Anti-fog
- NL - Night Light
- AL - Anti-fog, Night Light, Touch Sensor
- AT - Anti-fog & Touch Sensor
- NT - Night Light & Touch Sensor
- TR - Matrix Touch System

Additional Custom Specification

- Low-Iron Glasses
- Bluetooth Speakers
- DIY Touch Sensor Icons
- Powder Coated Chassis
- Antimicrobial Powder Coat
- Custom Inset & Frosting Sizes (Up to 2" for direct light styles)



2700K

3000K

3500K

4000K

5000K

6000K

ITEM CODE CONFIGURATION

Sample Item Code **F 02 I 3042 H 30 N 1 T R**

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨



① Types

- F - Future Line

② Styles

- 02 - Full Frame Edge Frost

③ Lighting Styles

- I - Indirect Light

④ Standard Sizes

- 2436-24"x36"
- 2448-24"x48"
- 3042-30"x42"
- 3048-30"x48"
- 3060-30"x60"
- 3648-36"x48"
- 3660-36"x60"
- 3672-36"x72"
- 4254-42"x54"
- 4284-42"x84"
- Custom 3173-31.4"x72.5"

(Specify the accurate size in additional custom specification notes)

⑤ Outputs

- S - Standard Output
(550 lumens/ft; 4.5 watts/ft)
- H - High Output
(750 lumens/ft; 6 watts/ft)

⑥ LED CCT (All CRI 90+)

- 27 - 2700k
- 30 - 3000k
- 35 - 3500k
- 40 - 4000k
- 50 - 5000k
- 00 - Color Switchable
(Only available with high output with touch sensor accessory or MTS)

⑦ Drivers

- V - 120-277VAC 0-10 Dimmable
- E - 120-277VAC ELV Dimmable
- N - 120-277VAC Non Dimming
(Mirrors with touch sensors have to use a non-dimming driver)

⑧ Mounting

- 1 - Vertical
- 2 - Horizontal

⑨ Accessories

- NA - None
- TS - Touch Sensor
- AN - Anti-fog & Night Light
- AF - Anti-fog
- NL - Night Light
- AL - Anti-fog, Night Light, Touch Sensor
- AT - Anti-fog & Touch Sensor
- NT - Night Light & Touch Sensor
- TR - Matrix Touch System

Additional Custom Specification

- Low-Iron Glasses
- Bluetooth Speakers
- DIY Touch Sensor Icons
- Powder Coated Chassis
- Antimicrobial Powder Coat
- Custom Inset & Frosting Sizes (Up to 2" for direct light styles)



2700K

3000K

3500K

4000K

5000K

6000K

ITEM CODE CONFIGURATION

Sample Item Code **F 03 B 2480 S 40 N 2 NA**

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨



① Types

- F - Future Line

② Styles

- 03 - Double Long Side Inset Frost

③ Lighting Styles

- D - Direct Light
- B - Direct & Indirect Light

④ Standard Sizes

- 2436-24"x36"
- 2448-24"x48"
- 3042-30"x42"
- 3048-30"x48"
- 3060-30"x60"
- 3648-36"x48"
- 3660-36"x60"
- 3672-36"x72"
- 4254-42"x54"
- 4284-42"x84"
- Custom 3173-31.4"x72.5"

(Specify the accurate size in additional custom specification notes)

⑤ Outputs

- S - Standard Output (550 lumens/ft; 4.5 watts/ft)
- H - High Output (750 lumens/ft; 6 watts/ft)

⑥ LED CCT (All CRI 90+)

- 27 - 2700k
- 30 - 3000k
- 35 - 3500k
- 40 - 4000k
- 50 - 5000k
- 00 - Color Switchable (Only available with high output with touch sensor accessory or MTS)

⑦ Drivers

- V - 120-277VAC 0-10 Dimmable
- E - 120-277VAC ELV Dimmable
- N - 120-277VAC Non Dimming (Mirrors with touch sensors have to use a non-dimming driver)

⑧ Mounting

- 1 - Vertical
- 2 - Horizontal

⑨ Accessories

- NA - None
- TS - Touch Sensor
- AN - Anti-fog & Night Light
- AF - Anti-fog
- NL - Night Light
- AL - Anti-fog, Night Light, Touch Sensor
- AT - Anti-fog & Touch Sensor
- NT - Night Light & Touch Sensor
- TR - Matrix Touch System

Additional Custom Specification

- Low-Iron Glasses
- Bluetooth Speakers
- DIY Touch Sensor Icons
- Powder Coated Chassis
- Antimicrobial Powder Coat
- Custom Inset & Frosting Sizes (Up to 2" for direct light styles)



2700K

3000K

3500K

4000K

5000K

6000K

ITEM CODE CONFIGURATION

Sample Item Code

F 0 4 I 2 4 7 0 H 4 0 E 1 N A
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨



① Types

- F - Future Line

② Styles

- 04 - Double Long Side Edge Frost

③ Lighting Styles

- I - Indirect Light

④ Standard Sizes

- 2436-24"x36"
- 2448-24"x48"
- 3042-30"x42"
- 3048-30"x48"
- 3060-30"x60"
- 3648-36"x48"
- 3660-36"x60"
- 3672-36"x72"
- 4254-42"x54"
- 4284-42"x84"
- Custom 3173-31.4"x72.5"
(Specify the accurate size in additional custom specification notes)

⑤ Outputs

- S - Standard Output
(550 lumens/ft; 4.5 watts/ft)
- H - High Output
(750 lumens/ft; 6 watts/ft)

⑥ LED CCT (All CRI 90+)

- 27 - 2700k
- 30 - 3000k
- 35 - 3500k
- 40 - 4000k
- 50 - 5000k
- 00 - Color Switchable
(Only available with high output with touch sensor accessory or MTS)

⑦ Drivers

- V - 120-277VAC 0-10 Dimmable
- E - 120-277VAC ELV Dimmable
- N - 120-277VAC Non Dimming
(Mirrors with touch sensors have to use a non-dimming driver)

⑧ Mounting

- 1 - Vertical
- 2 - Horizontal

⑨ Accessories

- NA - None
- TS - Touch Sensor
- AN - Anti-fog & Night Light
- AF - Anti-fog
- NL - Night Light
- AL - Anti-fog, Night Light, Touch Sensor
- AT - Anti-fog & Touch Sensor
- NT - Night Light & Touch Sensor
- TR - Matrix Touch System

Additional Custom Specification

- Low-Iron Glasses
- Bluetooth Speakers
- DIY Touch Sensor Icons
- Powder Coated Chassis
- Antimicrobial Powder Coat
- Custom Inset & Frosting Sizes (Up to 2" for direct light styles)



2700K

3000K

3500K

4000K

5000K

6000K

ITEM CODE CONFIGURATION

Sample Item Code

F 0 5 I 3 0 4 2 S 3 0 N 2 T S
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨



① Types

- F - Future Line

② Styles

- 05 - No Frost, All Sides Illumination

③ Lighting Styles

- I - Indirect Light

④ Standard Sizes

- 2436-24"x36"
- 2448-24"x48"
- 3042-30"x42"
- 3048-30"x48"
- 3060-30"x60"
- 3648-36"x48"
- 3660-36"x60"
- 3672-36"x72"
- 4254-42"x54"
- 4284-42"x84"
- Custom 3173-31.4"x72.5"
(Specify the accurate size in additional custom specification notes)

⑤ Outputs

- S - Standard Output
(550 lumens/ft; 4.5 watts/ft)
- H - High Output
(750 lumens/ft; 6 watts/ft)

⑥ LED CCT (All CRI 90+)

- 27 - 2700k
- 30 - 3000k
- 35 - 3500k
- 40 - 4000k
- 50 - 5000k
- 00 - Color Switchable
(Only available with high output with touch sensor accessory or MTS)

⑦ Drivers

- V - 120-277VAC 0-10 Dimmable
- E - 120-277VAC ELV Dimmable
- N - 120-277VAC Non Dimming
(Mirrors with touch sensors have to use a non-dimming driver)

⑧ Mounting

- 1 - Vertical
- 2 - Horizontal

⑨ Accessories

- NA - None
- TS - Touch Sensor
- AN - Anti-fog & Night Light
- AF - Anti-fog
- NL - Night Light
- AL - Anti-fog, Night Light, Touch Sensor
- AT - Anti-fog & Touch Sensor
- NT - Night Light & Touch Sensor
- TR - Matrix Touch System

Additional Custom Specification

- Low-Iron Glasses
- Bluetooth Speakers
- DIY Touch Sensor Icons
- Powder Coated Chassis
- Antimicrobial Powder Coat
- Custom Inset & Frosting Sizes (Up to 2" for direct light styles)



2700K

3000K

3500K

4000K

5000K

6000K

ITEM CODE CONFIGURATION

Sample Item Code

F 0 6 I 2 4 3 6 S 3 0 N 1 N A
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨



① Types

- F - Future Line

② Styles

- 06 - Double Short Side Edge Frost

③ Lighting Styles

- I - Indirect Light

④ Standard Sizes

- 2436-24"x36"
- 2448-24"x48"
- 3042-30"x42"
- 3048-30"x48"
- 3060-30"x60"
- 3648-36"x48"
- 3660-36"x60"
- 3672-36"x72"
- 4254-42"x54"
- 4284-42"x84"
- Custom 3173-31.4"x72.5"

(Specify the accurate size in additional custom specification notes)

⑤ Outputs

- S - Standard Output (550 lumens/ft; 4.5 watts/ft)
- H - High Output (750 lumens/ft; 6 watts/ft)

⑥ LED CCT (All CRI 90+)

- 27 - 2700k
- 30 - 3000k
- 35 - 3500k
- 40 - 4000k
- 50 - 5000k
- 00 - Color Switchable (Only available with high output with touch sensor accessory or MTS)

⑦ Drivers

- V - 120-277VAC 0-10 Dimmable
- E - 120-277VAC ELV Dimmable
- N - 120-277VAC Non Dimming (Mirrors with touch sensors have to use a non-dimming driver)

⑧ Mounting

- 1 - Vertical
- 2 - Horizontal

⑨ Accessories

- NA - None
- TS - Touch Sensor
- AN - Anti-fog & Night Light
- AF - Anti-fog
- NL - Night Light
- AL - Anti-fog, Night Light, Touch Sensor
- AT - Anti-fog & Touch Sensor
- NT - Night Light & Touch Sensor
- TR - Matrix Touch System

Additional Custom Specification

- Low-Iron Glasses
- Bluetooth Speakers
- DIY Touch Sensor Icons
- Powder Coated Chassis
- Antimicrobial Powder Coat
- Custom Inset & Frosting Sizes (Up to 2" for direct light styles)



2700K

3000K

3500K

4000K

5000K

6000K

ITEM CODE CONFIGURATION

Sample Item Code **F 07 B 3648 S 30 N 2 NA**

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨



① Types

- F - Future Line

② Styles

- 07 - Double Short Side Inset Frost

③ Lighting Styles

- D - Direct Light
- B - Direct & Indirect Light

④ Standard Sizes

- 2436-24"x36"
- 2448-24"x48"
- 3042-30"x42"
- 3048-30"x48"
- 3060-30"x60"
- 3648-36"x48"
- 3660-36"x60"
- 3672-36"x72"
- 4254-42"x54"
- 4284-42"x84"
- Custom 3173-31.4"x72.5"

(Specify the accurate size in additional custom specification notes)

⑤ Outputs

- S - Standard Output (550 lumens/ft; 4.5 watts/ft)
- H - High Output (750 lumens/ft; 6 watts/ft)

⑥ LED CCT (All CRI 90+)

- 27 - 2700k
- 30 - 3000k
- 35 - 3500k
- 40 - 4000k
- 50 - 5000k
- 00 - Color Switchable (Only available with high output with touch sensor accessory or MTS)

⑦ Drivers

- V - 120-277VAC 0-10 Dimmable
- E - 120-277VAC ELV Dimmable
- N - 120-277VAC Non Dimming (Mirrors with touch sensors have to use a non-dimming driver)

⑧ Mounting

- 1 - Vertical
- 2 - Horizontal

⑨ Accessories

- NA - None
- TS - Touch Sensor
- AN - Anti-fog & Night Light
- AF - Anti-fog
- NL - Night Light
- AL - Anti-fog, Night Light, Touch Sensor
- AT - Anti-fog & Touch Sensor
- NT - Night Light & Touch Sensor
- TR - Matrix Touch System

Additional Custom Specification

- Low-Iron Glasses
- Bluetooth Speakers
- DIY Touch Sensor Icons
- Powder Coated Chassis
- Antimicrobial Powder Coat
- Custom Inset & Frosting Sizes (Up to 2" for direct light styles)



2700K

3000K

3500K

4000K

5000K

6000K

ITEM CODE CONFIGURATION

Sample Item Code

F 0 8 I 3 0 4 2 H 3 0 N 2 N A
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨



① Types

- F - Future Line

② Styles

- 08 - Single Long Side Edge Frost

③ Lighting Styles

- I - Indirect Light

④ Standard Sizes

- 2436-24"x36"
- 2448-24"x48"
- 3042-30"x42"
- 3048-30"x48"
- 3060-30"x60"
- 3648-36"x48"
- 3660-36"x60"
- 3672-36"x72"
- 4254-42"x54"
- 4284-42"x84"
- Custom 3173-31.4"x72.5"

(Specify the accurate size in additional custom specification notes)

⑤ Outputs

- S - Standard Output (550 lumens/ft; 4.5 watts/ft)
- H - High Output (750 lumens/ft; 6 watts/ft)

⑥ LED CCT (All CRI 90+)

- 27 - 2700k
- 30 - 3000k
- 35 - 3500k
- 40 - 4000k
- 50 - 5000k
- 00 - Color Switchable (Only available with high output with touch sensor accessory or MTS)

⑦ Drivers

- V - 120-277VAC 0-10 Dimmable
- E - 120-277VAC ELV Dimmable
- N - 120-277VAC Non Dimming (Mirrors with touch sensors have to use a non-dimming driver)

⑧ Mounting

- 1 - Vertical
- 2 - Horizontal

⑨ Accessories

- NA - None
- TS - Touch Sensor
- AN - Anti-fog & Night Light
- AF - Anti-fog
- NL - Night Light
- AL - Anti-fog, Night Light, Touch Sensor
- AT - Anti-fog & Touch Sensor
- NT - Night Light & Touch Sensor
- TR - Matrix Touch System

Additional Custom Specification

- Low-Iron Glasses
- Bluetooth Speakers
- DIY Touch Sensor Icons
- Powder Coated Chassis
- Antimicrobial Powder Coat
- Custom Inset & Frosting Sizes (Up to 2" for direct light styles)



2700K

3000K

3500K

4000K

5000K

6000K

ITEM CODE CONFIGURATION

Sample Item Code

F 0 9 D 3 0 4 2 H 0 0 N 2 T S
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨



① Types

- F - Future Line

② Styles

- 09 - Single Long Side Inset Frost

③ Lighting Styles

- D - Direct Light
- B - Direct & Indirect Light

④ Standard Sizes

- 2436-24"x36"
- 2448-24"x48"
- 3042-30"x42"
- 3048-30"x48"
- 3060-30"x60"
- 3648-36"x48"
- 3660-36"x60"
- 3672-36"x72"
- 4254-42"x54"
- 4284-42"x84"
- Custom 3173-31.4"x72.5"

(Specify the accurate size in additional custom specification notes)

⑤ Outputs

- S - Standard Output (550 lumens/ft; 4.5 watts/ft)
- H - High Output (750 lumens/ft; 6 watts/ft)

⑥ LED CCT (All CRI 90+)

- 27 - 2700k
- 30 - 3000k
- 35 - 3500k
- 40 - 4000k
- 50 - 5000k
- 00 - Color Switchable (Only available with high output with touch sensor accessory or MTS)

⑦ Drivers

- V - 120-277VAC 0-10 Dimmable
- E - 120-277VAC ELV Dimmable
- N - 120-277VAC Non Dimming (Mirrors with touch sensors have to use a non-dimming driver)

⑧ Mounting

- 1 - Vertical
- 2 - Horizontal

⑨ Accessories

- NA - None
- TS - Touch Sensor
- AN - Anti-fog & Night Light
- AF - Anti-fog
- NL - Night Light
- AL - Anti-fog, Night Light, Touch Sensor
- AT - Anti-fog & Touch Sensor
- NT - Night Light & Touch Sensor
- TR - Matrix Touch System

Additional Custom Specification

- Low-Iron Glasses
- Bluetooth Speakers
- DIY Touch Sensor Icons
- Powder Coated Chassis
- Antimicrobial Powder Coat
- Custom Inset & Frosting Sizes (Up to 2" for direct light styles)



2700K

3000K

3500K

4000K

5000K

6000K

ITEM CODE CONFIGURATION

Sample Item Code

F 1 0 1 2 4 3 6 H 0 0 N 1 T S
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨



① Types

- F - Future Line

② Styles

- 10 - Single Short Side Edge Frost

③ Lighting Styles

- I - Indirect Light

④ Standard Sizes

- 2436-24"x36"
- 2448-24"x48"
- 3042-30"x42"
- 3048-30"x48"
- 3060-30"x60"
- 3648-36"x48"
- 3660-36"x60"
- 3672-36"x72"
- 4254-42"x54"
- 4284-42"x84"
- Custom 3173-31.4"x72.5"

(Specify the accurate size in additional custom specification notes)

⑤ Outputs

- S - Standard Output (550 lumens/ft; 4.5 watts/ft)
- H - High Output (750 lumens/ft; 6 watts/ft)

⑥ LED CCT (All CRI 90+)

- 27 - 2700k
- 30 - 3000k
- 35 - 3500k
- 40 - 4000k
- 50 - 5000k
- 00 - Color Switchable (Only available with high output with touch sensor accessory or MTS)

⑦ Drivers

- V - 120-277VAC 0-10 Dimmable
- E - 120-277VAC ELV Dimmable
- N - 120-277VAC Non Dimming (Mirrors with touch sensors have to use a non-dimming driver)

⑧ Mounting

- 1 - Vertical
- 2 - Horizontal

⑨ Accessories

- NA - None
- TS - Touch Sensor
- AN - Anti-fog & Night Light
- AF - Anti-fog
- NL - Night Light
- AL - Anti-fog, Night Light, Touch Sensor
- AT - Anti-fog & Touch Sensor
- NT - Night Light & Touch Sensor
- TR - Matrix Touch System

Additional Custom Specification

- Low-Iron Glasses
- Bluetooth Speakers
- DIY Touch Sensor Icons
- Powder Coated Chassis
- Antimicrobial Powder Coat
- Custom Inset & Frosting Sizes (Up to 2" for direct light styles)



2700K

3000K

3500K

4000K

5000K

6000K

ITEM CODE CONFIGURATION

Sample Item Code

F 1 1 B 3 0 4 2 H 3 0 N 1 N A
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨



① Types

- F - Future Line

② Styles

- 11 - Single Short Side Inset Frost

③ Lighting Styles

- D - Direct Light
- B - Direct & Indirect Light

④ Standard Sizes

- 2436-24"x36"
- 2448-24"x48"
- 3042-30"x42"
- 3048-30"x48"
- 3060-30"x60"
- 3648-36"x48"
- 3660-36"x60"
- 3672-36"x72"
- 4254-42"x54"
- 4284-42"x84"
- Custom 3173-31.4"x72.5"

(Specify the accurate size in additional custom specification notes)

⑤ Outputs

- S - Standard Output (550 lumens/ft; 4.5 watts/ft)
- H - High Output (750 lumens/ft; 6 watts/ft)

⑥ LED CCT (All CRI 90+)

- 27 - 2700k
- 30 - 3000k
- 35 - 3500k
- 40 - 4000k
- 50 - 5000k
- 00 - Color Switchable (Only available with high output with touch sensor accessory or MTS)

⑦ Drivers

- V - 120-277VAC 0-10 Dimmable
- E - 120-277VAC ELV Dimmable
- N - 120-277VAC Non Dimming (Mirrors with touch sensors have to use a non-dimming driver)

⑧ Mounting

- 1 - Vertical
- 2 - Horizontal

⑨ Accessories

- NA - None
- TS - Touch Sensor
- AN - Anti-fog & Night Light
- AF - Anti-fog
- NL - Night Light
- AL - Anti-fog, Night Light, Touch Sensor
- AT - Anti-fog & Touch Sensor
- NT - Night Light & Touch Sensor
- TR - Matrix Touch System


Additional Custom Specification

- Low-Iron Glasses
- Bluetooth Speakers
- DIY Touch Sensor Icons
- Powder Coated Chassis
- Antimicrobial Powder Coat
- Custom Inset & Frosting Sizes (Up to 2" for direct light styles)







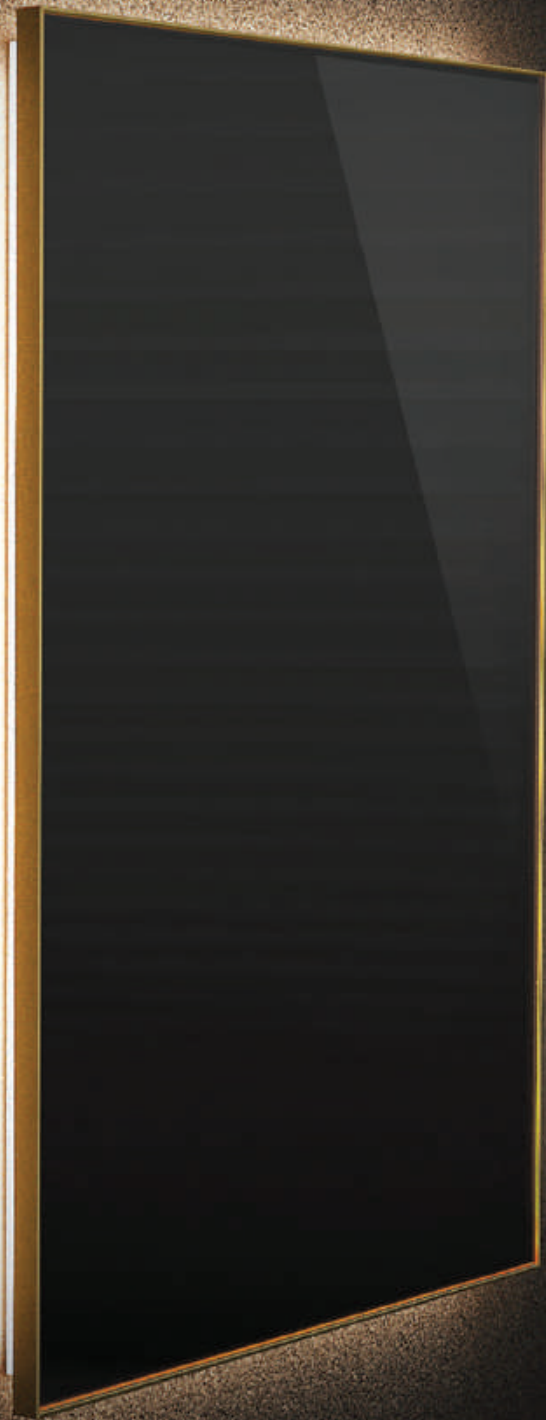

DECO LINE .

Thin Frame



MADE IN THE USA.

DECO LINE .
Thin Frame



T01B



T01D



T02I



T03B




T03D



T04I




T05I




T06I



T07B



T07D




T08I



T09B




T09D



T10I



T11B



T11B



2700K

3000K

3500K

4000K

5000K

6000K

ITEM CODE CONFIGURATION

Sample Item Code

T 0 1 B 2 4 7 0 H 3 0 N 1 B F N A
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩



① Types

- T - Deco Line Thin Frame

② Styles

- 01 - Full Frame Inset Frost

③ Lighting Styles

- D - Direct Light
- B - Direct & Indirect Light

④ Standard Sizes

- 2436-24"x36"
- 2448-24"x48"
- 3042-30"x42"
- 3048-30"x48"
- 3060-30"x60"
- 3648-36"x48"
- 3660-36"x60"
- 3672-36"x72"
- 4254-42"x54"
- 4284-42"x84"
- Custom 3173-31.4"x72.5"

(Specify the accurate size in additional custom specification notes)

⑤ Outputs

- S - Standard Output
(550 lumens/ft; 4.5 watts/ft)
- H - High Output
(750 lumens/ft; 6 watts/ft)

⑥ LED CCT (All CRI 90+)

- 27 - 2700K
- 30 - 3000K
- 35 - 3500K
- 40 - 4000K
- 50 - 5000K
- 00 - Color Switchable
(Only available with high output with touch sensor accessory or MTS)

⑦ Drivers

- V - 120-277VAC 0-10 Dimmable
- E - 120-277VAC ELV Dimmable
- N - 120-277VAC Non Dimming
(Mirrors with touch sensors have to use a non-dimming driver)

⑧ Mounting

- 1 - Vertical
- 2 - Horizontal

⑨ Frame Colors

- BF - Black Frame
- SF - Silver Frame
- GF - Gold Frame

⑩ Accessories

- NA - None
- TS - Touch Sensor
- AN - Anti-fog & Night Light

- AF - Anti-fog
- NL - Night Light
- AL - Anti-fog, Night Light, Touch Sensor

- AT - Anti-fog & Touch Sensor
- NT - Night Light & Touch Sensor
- TR - Matrix Touch System

Additional Custom Specification

- Low-Iron Glasses
- Bluetooth Speakers
- DIY Touch Sensor Icons
- Powder Coated Chassis
- Antimicrobial Powder Coat
- Custom Inset & Frosting Sizes (Up to 2" for direct light styles)



2700K

3000K

3500K

4000K

5000K

6000K

ITEM CODE CONFIGURATION

Sample Item Code **T 0 2 I 3 0 5 0 H 4 0 N 1 B F N A**

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩



① Types

- T - Deco Line Thin Frame

② Styles

- 02 - Full Frame Edge Frost

③ Lighting Styles

- I - Indirect Light

④ Standard Sizes

- 2436-24"x36"
- 2448-24"x48"
- 3042-30"x42"
- 3048-30"x48"
- 3060-30"x60"
- 3648-36"x48"
- 3660-36"x60"
- 3672-36"x72"
- 4254-42"x54"
- 4284-42"x84"
- Custom 3173-31.4"x72.5"

(Specify the accurate size in additional custom specification notes)

⑤ Outputs

- S - Standard Output (550 lumens/ft; 4.5 watts/ft)
- H - High Output (750 lumens/ft; 6 watts/ft)

⑥ LED CCT (All CRI 90+)

- 27 - 2700K
- 30 - 3000K
- 35 - 3500K
- 40 - 4000K
- 50 - 5000K
- 00 - Color Switchable (Only available with high output with touch sensor accessory or MTS)

⑦ Drivers

- V - 120-277VAC 0-10 Dimmable
- E - 120-277VAC ELV Dimmable
- N - 120-277VAC Non Dimming (Mirrors with touch sensors have to use a non-dimming driver)

⑧ Mounting

- 1 - Vertical
- 2 - Horizontal

⑨ Frame Colors

- BF - Black Frame
- SF - Silver Frame
- GF - Gold Frame

⑩ Accessories

- NA - None
- TS - Touch Sensor
- AN - Anti-fog & Night Light

- AF - Anti-fog
- NL - Night Light
- AL - Anti-fog, Night Light, Touch Sensor

- AT - Anti-fog & Touch Sensor
- NT - Night Light & Touch Sensor
- TR - Matrix Touch System

Additional Custom Specification

- Low-Iron Glasses
- Bluetooth Speakers
- DIY Touch Sensor Icons
- Powder Coated Chassis
- Antimicrobial Powder Coat
- Custom Inset & Frosting Sizes (Up to 2" for direct light styles)



2700K

3000K

3500K

4000K

5000K

6000K

ITEM CODE CONFIGURATION

Sample Item Code

T 0 3 B 2 4 4 8 H 3 0 N 1 S F N A

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩



① Types

- T - Deco Line Thin Frame

② Styles

- 03 - Double Long Side Inset Frost

③ Lighting Styles

- D - Direct Light
- B - Direct & Indirect Light

④ Standard Sizes

- 2436-24"x36"
- 2448-24"x48"
- 3042-30"x42"
- 3048-30"x48"
- 3060-30"x60"
- 3648-36"x48"
- 3660-36"x60"
- 3672-36"x72"

- 4254-42"x54"
 - 4284-42"x84"
 - Custom 3173-31.4"x72.5"
- (Specify the accurate size in additional custom specification notes)

⑤ Outputs

- S - Standard Output
(550 lumens/ft; 4.5 watts/ft)
- H - High Output
(750 lumens/ft; 6 watts/ft)

⑥ LED CCT (All CRI 90+)

- 27 - 2700k
- 30 - 3000k
- 35 - 3500k
- 40 - 4000k
- 50 - 5000k
- 00 - Color Switchable
(Only available with high output with touch sensor accessory or MTS)

⑦ Drivers

- V - 120-277VAC 0-10 Dimmable
 - E - 120-277VAC ELV Dimmable
 - N - 120-277VAC Non Dimming
- (Mirrors with touch sensors have to use a non-dimming driver)

⑧ Mounting

- 1 - Vertical
- 2 - Horizontal

⑨ Frame Colors

- BF - Black Frame
- SF - Silver Frame
- GF - Gold Frame

⑩ Accessories

- NA - None
- TS - Touch Sensor
- AN - Anti-fog & Night Light

- AF - Anti-fog
- NL - Night Light
- AL - Anti-fog, Night Light, Touch Sensor

- AT - Anti-fog & Touch Sensor
- NT - Night Light & Touch Sensor
- TR - Matrix Touch System

Additional Custom Specification

- Low-Iron Glasses
- Bluetooth Speakers

- DIY Touch Sensor Icons
- Powder Coated Chassis

- Antimicrobial Powder Coat
- Custom Inset & Frosting Sizes (Up to 2" for direct light styles)



2700K

3000K

3500K

4000K

5000K

6000K

ITEM CODE CONFIGURATION

Sample Item Code **T 0 4 I 2 4 7 0 S 3 0 N 1 G F N A**

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩



① Types

- T - Deco Line Thin Frame

② Styles

- 04 - Double Long Side Edge Frost

③ Lighting Styles

- I - Indirect Light

④ Standard Sizes

- 2436-24"x36"
- 2448-24"x48"
- 3042-30"x42"
- 3048-30"x48"
- 3060-30"x60"
- 3648-36"x48"
- 3660-36"x60"
- 3672-36"x72"

- 4254-42"x54"
 - 4284-42"x84"
 - Custom 3173-31.4"x72.5"
- (Specify the accurate size in additional custom specification notes)

⑤ Outputs

- S - Standard Output (550 lumens/ft; 4.5 watts/ft)
- H - High Output (750 lumens/ft; 6 watts/ft)

⑥ LED CCT (All CRI 90+)

- 27 - 2700K
- 30 - 3000K
- 35 - 3500K
- 40 - 4000K
- 50 - 5000K
- 00 - Color Switchable (Only available with high output with touch sensor accessory or MTS)

⑦ Drivers

- V - 120-277VAC 0-10 Dimmable
 - E - 120-277VAC ELV Dimmable
 - N - 120-277VAC Non Dimming
- (Mirrors with touch sensors have to use a non-dimming driver)

⑧ Mounting

- 1 - Vertical
- 2 - Horizontal

⑨ Frame Colors

- BF - Black Frame
- SF - Silver Frame
- GF - Gold Frame

⑩ Accessories

- NA - None
- TS - Touch Sensor
- AN - Anti-fog & Night Light

- AF - Anti-fog
- NL - Night Light
- AL - Anti-fog, Night Light, Touch Sensor

- AT - Anti-fog & Touch Sensor
- NT - Night Light & Touch Sensor
- TR - Matrix Touch System

Additional Custom Specification

- Low-Iron Glasses
- Bluetooth Speakers

- DIY Touch Sensor Icons
- Powder Coated Chassis

- Antimicrobial Powder Coat
- Custom Inset & Frosting Sizes (Up to 2" for direct light styles)



2700K

3000K

3500K

4000K

5000K

6000K

ITEM CODE CONFIGURATION

Sample Item Code

T 0 5 I 3 0 7 2 H 0 0 N 2 B F T S
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩



① Types

- T - Deco Line Thin Frame

② Styles

- 05 - No Frost, All Sides Illumination

③ Lighting Styles

- I - Indirect Light

④ Standard Sizes

- 2436-24"x36"
- 2448-24"x48"
- 3042-30"x42"
- 3048-30"x48"
- 3060-30"x60"
- 3648-36"x48"
- 3660-36"x60"
- 3672-36"x72"

- 4254-42"x54"
 - 4284-42"x84"
 - Custom 3173-31.4"x72.5"
- (Specify the accurate size in additional custom specification notes)

⑤ Outputs

- S - Standard Output (550 lumens/ft; 4.5 watts/ft)
- H - High Output (750 lumens/ft; 6 watts/ft)

⑥ LED CCT (All CRI 90+)

- 27 - 2700k
- 30 - 3000k
- 35 - 3500k
- 40 - 4000k
- 50 - 5000k
- 00 - Color Switchable (Only available with high output with touch sensor accessory or MTS)

⑦ Drivers

- V - 120-277VAC 0-10 Dimmable
 - E - 120-277VAC ELV Dimmable
 - N - 120-277VAC Non Dimming
- (Mirrors with touch sensors have to use a non-dimming driver)

⑧ Mounting

- 1 - Vertical
- 2 - Horizontal

⑨ Frame Colors

- BF - Black Frame
- SF - Silver Frame
- GF - Gold Frame

⑩ Accessories

- NA - None
- TS - Touch Sensor
- AN - Anti-fog & Night Light

- AF - Anti-fog
- NL - Night Light
- AL - Anti-fog, Night Light, Touch Sensor

- AT - Anti-fog & Touch Sensor
- NT - Night Light & Touch Sensor
- TR - Matrix Touch System

Additional Custom Specification

- Low-Iron Glasses
- Bluetooth Speakers
- DIY Touch Sensor Icons
- Powder Coated Chassis
- Antimicrobial Powder Coat
- Custom Inset & Frosting Sizes (Up to 2" for direct light styles)



2700K

3000K

3500K

4000K

5000K

6000K

ITEM CODE CONFIGURATION

Sample Item Code **T 0 6 I 3 2 4 0 H 4 0 N 1 S F N A**

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩



① Types

- T - Deco Line Thin Frame

② Styles

- 06 - Double Short Side Edge Frost

③ Lighting Styles

- I - Indirect Light

④ Standard Sizes

- 2436-24"x36"
- 2448-24"x48"
- 3042-30"x42"
- 3048-30"x48"
- 3060-30"x60"
- 3648-36"x48"
- 3660-36"x60"
- 3672-36"x72"

- 4254-42"x54"
 - 4284-42"x84"
 - Custom 3173-31.4"x72.5"
- (Specify the accurate size in additional custom specification notes)

⑤ Outputs

- S - Standard Output (550 lumens/ft; 4.5 watts/ft)
- H - High Output (750 lumens/ft; 6 watts/ft)

⑥ LED CCT (All CRI 90+)

- 27 - 2700K
- 30 - 3000K
- 35 - 3500K
- 40 - 4000K
- 50 - 5000K
- 00 - Color Switchable (Only available with high output with touch sensor accessory or MTS)

⑦ Drivers

- V - 120-277VAC 0-10 Dimmable
 - E - 120-277VAC ELV Dimmable
 - N - 120-277VAC Non Dimming
- (Mirrors with touch sensors have to use a non-dimming driver)

⑧ Mounting

- 1 - Vertical
- 2 - Horizontal

⑨ Frame Colors

- BF - Black Frame
- SF - Silver Frame
- GF - Gold Frame

⑩ Accessories

- NA - None
- TS - Touch Sensor
- AN - Anti-fog & Night Light

- AF - Anti-fog
- NL - Night Light
- AL - Anti-fog, Night Light, Touch Sensor

- AT - Anti-fog & Touch Sensor
- NT - Night Light & Touch Sensor
- TR - Matrix Touch System

Additional Custom Specification

- Low-Iron Glasses
- Bluetooth Speakers

- DIY Touch Sensor Icons
- Powder Coated Chassis

- Antimicrobial Powder Coat
- Custom Inset & Frosting Sizes (Up to 2" for direct light styles)



2700K

3000K

3500K

4000K

5000K

6000K

ITEM CODE CONFIGURATION

Sample Item Code

T 0 7 B 2 4 4 8 H 0 0 N 1 B F N A
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩



① Types

- T - Deco Line Thin Frame

② Styles

- 07 - Double Short Side Inset Frost

③ Lighting Styles

- D - Direct Light
- B - Direct & Indirect Light

④ Standard Sizes

- 2436-24"x36"
- 2448-24"x48"
- 3042-30"x42"
- 3048-30"x48"
- 3060-30"x60"
- 3648-36"x48"
- 3660-36"x60"
- 3672-36"x72"

- 4254-42"x54"
 - 4284-42"x84"
 - Custom 3173-31.4"x72.5"
- (Specify the accurate size in additional custom specification notes)

⑤ Outputs

- S - Standard Output (550 lumens/ft; 4.5 watts/ft)
- H - High Output (750 lumens/ft; 6 watts/ft)

⑥ LED CCT (All CRI 90+)

- 27 - 2700K
- 30 - 3000K
- 35 - 3500K
- 40 - 4000K
- 50 - 5000K
- 00 - Color Switchable (Only available with high output with touch sensor accessory or MTS)

⑦ Drivers

- V - 120-277VAC 0-10 Dimmable
 - E - 120-277VAC ELV Dimmable
 - N - 120-277VAC Non Dimming
- (Mirrors with touch sensors have to use a non-dimming driver)

⑧ Mounting

- 1 - Vertical
- 2 - Horizontal

⑨ Frame Colors

- BF - Black Frame
- SF - Silver Frame
- GF - Gold Frame

⑩ Accessories

- NA - None
- TS - Touch Sensor
- AN - Anti-fog & Night Light

- AF - Anti-fog
- NL - Night Light
- AL - Anti-fog, Night Light, Touch Sensor

- AT - Anti-fog & Touch Sensor
- NT - Night Light & Touch Sensor
- TR - Matrix Touch System

Additional Custom Specification

- Low-Iron Glasses
- Bluetooth Speakers

- DIY Touch Sensor Icons
- Powder Coated Chassis

- Antimicrobial Powder Coat
- Custom Inset & Frosting Sizes (Up to 2" for direct light styles)



2700K

3000K

3500K

4000K

5000K

6000K

ITEM CODE CONFIGURATION

Sample Item Code

T 0 8 I 3 0 4 8 H 4 0 N 2 B F N A

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩



① Types

- T - Deco Line Thin Frame

② Styles

- 08 - Single Long Side Edge Frost

③ Lighting Styles

- I - Indirect Light

④ Standard Sizes

- 2436-24"x36"
- 2448-24"x48"
- 3042-30"x42"
- 3048-30"x48"
- 3060-30"x60"
- 3648-36"x48"
- 3660-36"x60"
- 3672-36"x72"

- 4254-42"x54"
 - 4284-42"x84"
 - Custom 3173-31.4"x72.5"
- (Specify the accurate size in additional custom specification notes)

⑤ Outputs

- S - Standard Output (550 lumens/ft; 4.5 watts/ft)
- H - High Output (750 lumens/ft; 6 watts/ft)

⑥ LED CCT (All CRI 90+)

- 27 - 2700k
- 30 - 3000k
- 35 - 3500k
- 40 - 4000k
- 50 - 5000k
- 00 - Color Switchable (Only available with high output with touch sensor accessory or MTS)

⑦ Drivers

- V - 120-277VAC 0-10 Dimmable
 - E - 120-277VAC ELV Dimmable
 - N - 120-277VAC Non Dimming
- (Mirrors with touch sensors have to use a non-dimming driver)

⑧ Mounting

- 1 - Vertical
- 2 - Horizontal

⑨ Frame Colors

- BF - Black Frame
- SF - Silver Frame
- GF - Gold Frame

⑩ Accessories

- NA - None
- TS - Touch Sensor
- AN - Anti-fog & Night Light

Additional Custom Specification

- Low-Iron Glasses
- Bluetooth Speakers

- DIY Touch Sensor Icons
- Powder Coated Chassis

- Antimicrobial Powder Coat
- Custom Inset & Frosting Sizes (Up to 2" for direct light styles)



2700K

3000K

3500K

4000K

5000K

6000K

ITEM CODE CONFIGURATION

Sample Item Code

T 0 9 D 4 2 9 8 S 3 0 N 2 B F N A

①

②

③

④

⑤

⑥

⑦

⑧

⑨

⑩



① Types

- T - Deco Line Thin Frame

② Styles

- 09 - Single Long Side Inset Frost

③ Lighting Styles

- D - Direct Light
- B - Direct & Indirect Light

④ Standard Sizes

- 2436-24"x36"
- 2448-24"x48"
- 3042-30"x42"
- 3048-30"x48"
- 3060-30"x60"
- 3648-36"x48"
- 3660-36"x60"
- 3672-36"x72"

- 4254-42"x54"
- 4284-42"x84"
- Custom 3173-31.4"x72.5"

(Specify the accurate size in additional custom specification notes)

⑤ Outputs

- S - Standard Output
(550 lumens/ft; 4.5 watts/ft)
- H - High Output
(750 lumens/ft; 6 watts/ft)

⑥ LED CCT (All CRI 90+)

- 27 - 2700k
- 30 - 3000k
- 35 - 3500k
- 40 - 4000k
- 50 - 5000k
- 00 - Color Switchable
(Only available with high output with touch sensor accessory or MTS)

⑦ Drivers

- V - 120-277VAC 0-10 Dimmable
- E - 120-277VAC ELV Dimmable
- N - 120-277VAC Non Dimming
(Mirrors with touch sensors have to use a non-dimming driver)

⑧ Mounting

- 1 - Vertical
- 2 - Horizontal

⑨ Frame Colors

- BF - Black Frame
- SF - Silver Frame
- GF - Gold Frame

⑩ Accessories

- NA - None
- TS - Touch Sensor
- AN - Anti-fog & Night Light

- AF - Anti-fog
- NL - Night Light
- AL - Anti-fog, Night Light, Touch Sensor

- AT - Anti-fog & Touch Sensor
- NT - Night Light & Touch Sensor
- TR - Matrix Touch System

Additional Custom Specification

- Low-Iron Glasses
- Bluetooth Speakers

- DIY Touch Sensor Icons
- Powder Coated Chassis

- Antimicrobial Powder Coat
- Custom Inset & Frosting Sizes (Up to 2" for direct light styles)



2700K

3000K

3500K

4000K

5000K

6000K

ITEM CODE CONFIGURATION

Sample Item Code

T 1 0 1 2 4 3 6 H 3 0 N 1 G F N A
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩



① Types

- T - Deco Line Thin Frame

② Styles

- 10 - Single Short Side Edge Frost

③ Lighting Styles

- I - Indirect Light

④ Standard Sizes

- 2436-24"x36"
- 2448-24"x48"
- 3042-30"x42"
- 3048-30"x48"
- 3060-30"x60"
- 3648-36"x48"
- 3660-36"x60"
- 3672-36"x72"

- 4254-42"x54"
 - 4284-42"x84"
 - Custom 3173-31.4"x72.5"
- (Specify the accurate size in additional custom specification notes)

⑤ Outputs

- S - Standard Output (550 lumens/ft; 4.5 watts/ft)
- H - High Output (750 lumens/ft; 6 watts/ft)

⑥ LED CCT (All CRI 90+)

- 27 - 2700k
- 30 - 3000k
- 35 - 3500k
- 40 - 4000k
- 50 - 5000k
- 00 - Color Switchable (Only available with high output with touch sensor accessory or MTS)

⑦ Drivers

- V - 120-277VAC 0-10 Dimmable
 - E - 120-277VAC ELV Dimmable
 - N - 120-277VAC Non Dimming
- (Mirrors with touch sensors have to use a non-dimming driver)

⑧ Mounting

- 1 - Vertical
- 2 - Horizontal

⑨ Frame Colors

- BF - Black Frame
- SF - Silver Frame
- GF - Gold Frame

⑩ Accessories

- NA - None
- TS - Touch Sensor
- AN - Anti-fog & Night Light

- AF - Anti-fog
- NL - Night Light
- AL - Anti-fog, Night Light, Touch Sensor

- AT - Anti-fog & Touch Sensor
- NT - Night Light & Touch Sensor
- TR - Matrix Touch System

Additional Custom Specification

- Low-Iron Glasses
- Bluetooth Speakers

- DIY Touch Sensor Icons
- Powder Coated Chassis

- Antimicrobial Powder Coat
- Custom Inset & Frosting Sizes (Up to 2" for direct light styles)



2700K

3000K

3500K

4000K

5000K

6000K

ITEM CODE CONFIGURATION

Sample Item Code

T 1 1 D 3 0 4 2 H 3 0 N 1 B F N A

①

②

③

④

⑤

⑥

⑦

⑧

⑨

⑩



① Types

- T - Deco Line Thin Frame

② Styles

- 11 - Single Short Side Inset Frost

③ Lighting Styles

- D - Direct Light
- B - Direct & Indirect Light

④ Standard Sizes

- 2436-24"x36"
- 2448-24"x48"
- 3042-30"x42"
- 3048-30"x48"
- 3060-30"x60"
- 3648-36"x48"
- 3660-36"x60"
- 3672-36"x72"

- 4254-42"x54"
- 4284-42"x84"
- Custom 3173-31.4"x72.5"

(Specify the accurate size in additional custom specification notes)

⑤ Outputs

- S - Standard Output (550 lumens/ft; 4.5 watts/ft)
- H - High Output (750 lumens/ft; 6 watts/ft)

⑥ LED CCT (All CRI 90+)

- 27 - 2700K
- 30 - 3000K
- 35 - 3500K
- 40 - 4000K
- 50 - 5000K
- 00 - Color Switchable (Only available with high output with touch sensor accessory or MTS)

⑦ Drivers

- V - 120-277VAC 0-10 Dimmable
- E - 120-277VAC ELV Dimmable
- N - 120-277VAC Non Dimming

(Mirrors with touch sensors have to use a non-dimming driver)

⑧ Mounting

- 1 - Vertical
- 2 - Horizontal

⑨ Frame Colors

- BF - Black Frame
- SF - Silver Frame
- GF - Gold Frame

⑩ Accessories

- NA - None
- TS - Touch Sensor
- AN - Anti-fog & Night Light

- AF - Anti-fog
- NL - Night Light
- AL - Anti-fog, Night Light, Touch Sensor

- AT - Anti-fog & Touch Sensor
- NT - Night Light & Touch Sensor
- TR - Matrix Touch System

Additional Custom Specification

- Low-Iron Glasses
- Bluetooth Speakers


- DIY Touch Sensor Icons
- Powder Coated Chassis

- Antimicrobial Powder Coat
- Custom Inset & Frosting Sizes (Up to 2" for direct light styles)







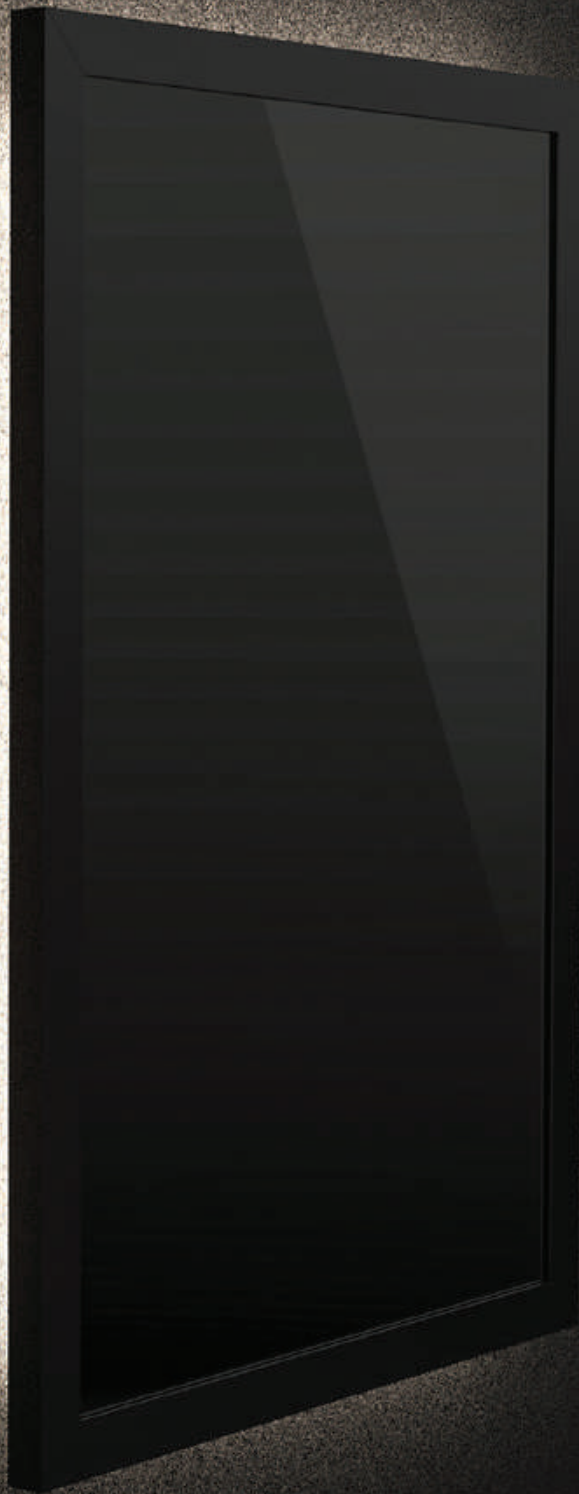

DECO LINE .

Wide Frame



MADE IN THE USA.

DECO LINE .

Wide Frame



W01B



W01D



W02I



W02D



W03B



W03D



W04I



W04D




W05I




W06I




W06D



W07B



W07D



W08I



W08D




W09B



W09D




W10I



W10D



W11B



W11D



2700K

3000K

3500K

4000K

5000K

6000K

ITEM CODE CONFIGURATION

Sample Item Code **W01D3072H30N1BFNA**

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩



① Types

- W - Deco Line Wide Frame

② Styles

- 01 - Full Frame Inset Frost

③ Lighting Styles

- D - Direct Light
- B - Direct & Indirect Light

④ Standard Sizes

- 2436-24"x36"
- 2448-24"x48"
- 3042-30"x42"
- 3048-30"x48"
- 3060-30"x60"
- 3648-36"x48"
- 3660-36"x60"
- 3672-36"x72"
- 4254-42"x54"
- 4284-42"x84"
- Custom 3173-31.4"x72.5"

(Specify the accurate size in additional custom specification notes)

⑤ Outputs

- S - Standard Output (550 lumens/ft; 4.5 watts/ft)
- H - High Output (750 lumens/ft; 6 watts/ft)

⑥ LED CCT (All CRI 90+)

- 27 - 2700K
- 30 - 3000K
- 35 - 3500K
- 40 - 4000K
- 50 - 5000K
- 00 - Color Switchable (Only available with high output with touch sensor accessory or MTS)

⑦ Drivers

- V - 120-277VAC 0-10 Dimmable
- E - 120-277VAC ELV Dimmable
- N - 120-277VAC Non Dimming

(Mirrors with touch sensors have to use a non-dimming driver)

⑧ Mounting

- 1 - Vertical
- 2 - Horizontal

⑨ Frame Colors

- BF - Black Frame
- SF - Silver Frame
- GF - Gold Frame

⑩ Accessories

- NA - None
- TS - Touch Sensor
- AN - Anti-fog & Night Light

- AF - Anti-fog
- NL - Night Light
- AL - Anti-fog, Night Light, Touch Sensor

- AT - Anti-fog & Touch Sensor
- NT - Night Light & Touch Sensor
- TR - Matrix Touch System

Additional Custom Specification

- Low-Iron Glasses
- Bluetooth Speakers
- DIY Touch Sensor Icons
- Powder Coated Chassis
- Antimicrobial Powder Coat
- Custom Inset & Frosting Sizes (Up to 2" for direct light styles)



2700K

3000K

3500K

4000K

5000K

6000K

ITEM CODE CONFIGURATION

Sample Item Code **W02D3280S27N1BFNA**

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩



① Types

- W - Deco Line Wide Frame

② Styles

- 02 - Full Frame Edge Frost

③ Lighting Styles

- D - Direct Light
- I - Indirect Light

④ Standard Sizes

- 2436-24"x36"
- 2448-24"x48"
- 3042-30"x42"
- 3048-30"x48"
- 3060-30"x60"
- 3648-36"x48"
- 3660-36"x60"
- 3672-36"x72"
- 4254-42"x54"
- 4284-42"x84"
- Custom 3173-31.4"x72.5"

(Specify the accurate size in additional custom specification notes)

⑤ Outputs

- S - Standard Output (550 lumens/ft; 4.5 watts/ft)
- H - High Output (750 lumens/ft; 6 watts/ft)

⑥ LED CCT (All CRI 90+)

- 27 - 2700K
- 30 - 3000K
- 35 - 3500K
- 40 - 4000K
- 50 - 5000K
- 00 - Color Switchable (Only available with high output with touch sensor accessory or MTS)

⑦ Drivers

- V - 120-277VAC 0-10 Dimmable
- E - 120-277VAC ELV Dimmable
- N - 120-277VAC Non Dimming (Mirrors with touch sensors have to use a non-dimming driver)

⑧ Mounting

- 1 - Vertical
- 2 - Horizontal

⑨ Frame Colors

- BF - Black Frame
- SF - Silver Frame
- GF - Gold Frame

⑩ Accessories

- NA - None
- TS - Touch Sensor
- AN - Anti-fog & Night Light
- AF - Anti-fog
- NL - Night Light
- AL - Anti-fog, Night Light, Touch Sensor
- AT - Anti-fog & Touch Sensor
- NT - Night Light & Touch Sensor
- TR - Matrix Touch System

Additional Custom Specification

- Low-Iron Glasses
- Bluetooth Speakers
- DIY Touch Sensor Icons
- Powder Coated Chassis
- Antimicrobial Powder Coat
- Custom Inset & Frosting Sizes (Up to 2" for direct light styles)



2700K

3000K

3500K

4000K

5000K

6000K

ITEM CODE CONFIGURATION

Sample Item Code **W03D3072H40N1BFNA**

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩



① Types

- W - Deco Line Wide Frame

② Styles

- 03 - Double Long Side Inset Frost

③ Lighting Styles

- D - Direct Light
- B - Direct & Indirect Light

④ Standard Sizes

- 2436-24"x36"
- 2448-24"x48"
- 3042-30"x42"
- 3048-30"x48"
- 3060-30"x60"
- 3648-36"x48"
- 3660-36"x60"
- 3672-36"x72"

- 4254-42"x54"
 - 4284-42"x84"
 - Custom 3173-31.4"x72.5"
- (Specify the accurate size in additional custom specification notes)

⑤ Outputs

- S - Standard Output (550 lumens/ft; 4.5 watts/ft)
- H - High Output (750 lumens/ft; 6 watts/ft)

⑥ LED CCT (All CRI 90+)

- 27 - 2700K
- 30 - 3000K
- 35 - 3500K
- 40 - 4000K
- 50 - 5000K
- 00 - Color Switchable (Only available with high output with touch sensor accessory or MTS)

⑦ Drivers

- V - 120-277VAC 0-10 Dimmable
 - E - 120-277VAC ELV Dimmable
 - N - 120-277VAC Non Dimming
- (Mirrors with touch sensors have to use a non-dimming driver)

⑧ Mounting

- 1 - Vertical
- 2 - Horizontal

⑨ Frame Colors

- BF - Black Frame
- SF - Silver Frame
- GF - Gold Frame

⑩ Accessories

- NA - None
- TS - Touch Sensor
- AN - Anti-fog & Night Light

- AF - Anti-fog
- NL - Night Light
- AL - Anti-fog, Night Light, Touch Sensor

- AT - Anti-fog & Touch Sensor
- NT - Night Light & Touch Sensor
- TR - Matrix Touch System

Additional Custom Specification

- Low-Iron Glasses
- Bluetooth Speakers
- DIY Touch Sensor Icons
- Powder Coated Chassis
- Antimicrobial Powder Coat
- Custom Inset & Frosting Sizes (Up to 2" for direct light styles)



2700K

3000K

3500K

4000K

5000K

6000K

ITEM CODE CONFIGURATION

Sample Item Code **W04D3072S40N1BFNA**

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩



① Types

- W - Deco Line Wide Frame

② Styles

- 04 - Double Long Side Edge Frost

③ Lighting Styles

- D - Direct Light
- I - Indirect Light

④ Standard Sizes

- 2436-24"x36"
- 2448-24"x48"
- 3042-30"x42"
- 3048-30"x48"
- 3060-30"x60"
- 3648-36"x48"
- 3660-36"x60"
- 3672-36"x72"

- 4254-42"x54"
 - 4284-42"x84"
 - Custom 3173-31.4"x72.5"
- (Specify the accurate size in additional custom specification notes)

⑤ Outputs

- S - Standard Output (550 lumens/ft; 4.5 watts/ft)
- H - High Output (750 lumens/ft; 6 watts/ft)

⑥ LED CCT (All CRI 90+)

- 27 - 2700K
- 30 - 3000K
- 35 - 3500K
- 40 - 4000K
- 50 - 5000K
- 00 - Color Switchable (Only available with high output with touch sensor accessory or MTS)

⑦ Drivers

- V - 120-277VAC 0-10 Dimmable
 - E - 120-277VAC ELV Dimmable
 - N - 120-277VAC Non Dimming
- (Mirrors with touch sensors have to use a non-dimming driver)

⑧ Mounting

- 1 - Vertical
- 2 - Horizontal

⑨ Frame Colors

- BF - Black Frame
- SF - Silver Frame
- GF - Gold Frame

⑩ Accessories

- NA - None
- TS - Touch Sensor
- AN - Anti-fog & Night Light

- AF - Anti-fog
- NL - Night Light
- AL - Anti-fog, Night Light, Touch Sensor

- AT - Anti-fog & Touch Sensor
- NT - Night Light & Touch Sensor
- TR - Matrix Touch System

Additional Custom Specification

- Low-Iron Glasses
- Bluetooth Speakers

- DIY Touch Sensor Icons
- Powder Coated Chassis

- Antimicrobial Powder Coat
- Custom Inset & Frosting Sizes (Up to 2" for direct light styles)



2700K

3000K

3500K

4000K

5000K

6000K

ITEM CODE CONFIGURATION

Sample Item Code **W05I3048S30N1SFNA**

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩



① Types

- W - Deco Line Wide Frame

② Styles

- 05 - No Frost, All Sides Illumination

③ Lighting Styles

- I - Indirect Light

④ Standard Sizes

- 2436-24"x36"
- 2448-24"x48"
- 3042-30"x42"
- 3048-30"x48"
- 3060-30"x60"
- 3648-36"x48"
- 3660-36"x60"
- 3672-36"x72"

- 4254-42"x54"
 - 4284-42"x84"
 - Custom 3173-31.4"x72.5"
- (Specify the accurate size in additional custom specification notes)

⑤ Outputs

- S - Standard Output (550 lumens/ft; 4.5 watts/ft)
- H - High Output (750 lumens/ft; 6 watts/ft)

⑥ LED CCT (All CRI 90+)

- 27 - 2700k
- 30 - 3000k
- 35 - 3500k
- 40 - 4000k
- 50 - 5000k
- 00 - Color Switchable (Only available with high output with touch sensor accessory or MTS)

⑦ Drivers

- V - 120-277VAC 0-10 Dimmable
 - E - 120-277VAC ELV Dimmable
 - N - 120-277VAC Non Dimming
- (Mirrors with touch sensors have to use a non-dimming driver)

⑧ Mounting

- 1 - Vertical
- 2 - Horizontal

⑨ Frame Colors

- BF - Black Frame
- SF - Silver Frame
- GF - Gold Frame

⑩ Accessories

- NA - None
- TS - Touch Sensor
- AN - Anti-fog & Night Light

- AF - Anti-fog
- NL - Night Light
- AL - Anti-fog, Night Light, Touch Sensor

- AT - Anti-fog & Touch Sensor
- NT - Night Light & Touch Sensor
- TR - Matrix Touch System

Additional Custom Specification

- Low-Iron Glasses
- Bluetooth Speakers
- DIY Touch Sensor Icons
- Powder Coated Chassis
- Antimicrobial Powder Coat
- Custom Inset & Frosting Sizes (Up to 2" for direct light styles)



2700K

3000K

3500K

4000K

5000K

6000K

ITEM CODE CONFIGURATION

Sample Item Code **W06D4092S40N2BFNA**

①

②

③

④

⑤

⑥

⑦

⑧

⑨

⑩



① Types

- W - Deco Line Wide Frame

② Styles

- 06 - Double Short Side Edge Frost

③ Lighting Styles

- D - Direct Light
- I - Indirect Light

④ Standard Sizes

- 2436-24"x36"
- 2448-24"x48"
- 3042-30"x42"
- 3048-30"x48"
- 3060-30"x60"
- 3648-36"x48"
- 3660-36"x60"
- 3672-36"x72"

- 4254-42"x54"
- 4284-42"x84"
- Custom 3173-31.4"x72.5"

(Specify the accurate size in additional custom specification notes)

⑤ Outputs

- S - Standard Output (550 lumens/ft; 4.5 watts/ft)
- H - High Output (750 lumens/ft; 6 watts/ft)

⑥ LED CCT (All CRI 90+)

- 27 - 2700K
- 30 - 3000K
- 35 - 3500K
- 40 - 4000K
- 50 - 5000K
- 00 - Color Switchable (Only available with high output with touch sensor accessory or MTS)

⑦ Drivers

- V - 120-277VAC 0-10 Dimmable
- E - 120-277VAC ELV Dimmable
- N - 120-277VAC Non Dimming (Mirrors with touch sensors have to use a non-dimming driver)

⑧ Mounting

- 1 - Vertical
- 2 - Horizontal

⑨ Frame Colors

- BF - Black Frame
- SF - Silver Frame
- GF - Gold Frame

⑩ Accessories

- NA - None
- TS - Touch Sensor
- AN - Anti-fog & Night Light

- AF - Anti-fog
- NL - Night Light
- AL - Anti-fog, Night Light, Touch Sensor

- AT - Anti-fog & Touch Sensor
- NT - Night Light & Touch Sensor
- TR - Matrix Touch System

Additional Custom Specification

- Low-Iron Glasses
- Bluetooth Speakers

- DIY Touch Sensor Icons
- Powder Coated Chassis

- Antimicrobial Powder Coat
- Custom Inset & Frosting Sizes (Up to 2" for direct light styles)



2700K

3000K

3500K

4000K

5000K

6000K

ITEM CODE CONFIGURATION

Sample Item Code **W07D3678S40N2BFNA**

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩



① Types

- W - Deco Line Wide Frame

② Styles

- 07 - Double Short Side Inset Frost

③ Lighting Styles

- D - Direct Light
- B - Direct & Indirect Light

④ Standard Sizes

- 2436-24"x36"
- 2448-24"x48"
- 3042-30"x42"
- 3048-30"x48"
- 3060-30"x60"
- 3648-36"x48"
- 3660-36"x60"
- 3672-36"x72"

- 4254-42"x54"
- 4284-42"x84"
- Custom 3173-31.4"x72.5"

(Specify the accurate size in additional custom specification notes)

⑤ Outputs

- S - Standard Output (550 lumens/ft; 4.5 watts/ft)
- H - High Output (750 lumens/ft; 6 watts/ft)

⑥ LED CCT (All CRI 90+)

- 27 - 2700K
- 30 - 3000K
- 35 - 3500K
- 40 - 4000K
- 50 - 5000K
- 00 - Color Switchable (Only available with high output with touch sensor accessory or MTS)

⑦ Drivers

- V - 120-277VAC 0-10 Dimmable
- E - 120-277VAC ELV Dimmable
- N - 120-277VAC Non Dimming

(Mirrors with touch sensors have to use a non-dimming driver)

⑧ Mounting

- 1 - Vertical
- 2 - Horizontal

⑨ Frame Colors

- BF - Black Frame
- SF - Silver Frame
- GF - Gold Frame

⑩ Accessories

- NA - None
- TS - Touch Sensor
- AN - Anti-fog & Night Light

- AF - Anti-fog
- NL - Night Light
- AL - Anti-fog, Night Light, Touch Sensor

- AT - Anti-fog & Touch Sensor
- NT - Night Light & Touch Sensor
- TR - Matrix Touch System

Additional Custom Specification

- Low-Iron Glasses
- Bluetooth Speakers

- DIY Touch Sensor Icons
- Powder Coated Chassis

- Antimicrobial Powder Coat
- Custom Inset & Frosting Sizes (Up to 2" for direct light styles)



2700K

3000K

3500K

4000K

5000K

6000K

ITEM CODE CONFIGURATION

Sample Item Code **W08I4092H50N2BFNA**

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩



① Types

- W - Deco Line Wide Frame

② Styles

- 08 - Single Long Side Edge Frost

③ Lighting Styles

- D - Direct Light
- I - Indirect Light

④ Standard Sizes

- 2436-24"x36"
- 2448-24"x48"
- 3042-30"x42"
- 3048-30"x48"
- 3060-30"x60"
- 3648-36"x48"
- 3660-36"x60"
- 3672-36"x72"

- 4254-42"x54"
 - 4284-42"x84"
 - Custom 3173-31.4"x72.5"
- (Specify the accurate size in additional custom specification notes)

⑤ Outputs

- S - Standard Output (550 lumens/ft; 4.5 watts/ft)
- H - High Output (750 lumens/ft; 6 watts/ft)

⑥ LED CCT (All CRI 90+)

- 27 - 2700K
- 30 - 3000K
- 35 - 3500K
- 40 - 4000K
- 50 - 5000K
- 00 - Color Switchable (Only available with high output with touch sensor accessory or MTS)

⑦ Drivers

- V - 120-277VAC 0-10 Dimmable
 - E - 120-277VAC ELV Dimmable
 - N - 120-277VAC Non Dimming
- (Mirrors with touch sensors have to use a non-dimming driver)

⑧ Mounting

- 1 - Vertical
- 2 - Horizontal

⑨ Frame Colors

- BF - Black Frame
- SF - Silver Frame
- GF - Gold Frame

⑩ Accessories

- NA - None
- TS - Touch Sensor
- AN - Anti-fog & Night Light

- AF - Anti-fog
- NL - Night Light
- AL - Anti-fog, Night Light, Touch Sensor

- AT - Anti-fog & Touch Sensor
- NT - Night Light & Touch Sensor
- TR - Matrix Touch System

Additional Custom Specification

- Low-Iron Glasses
- Bluetooth Speakers
- DIY Touch Sensor Icons
- Powder Coated Chassis
- Antimicrobial Powder Coat
- Custom Inset & Frosting Sizes (Up to 2" for direct light styles)



2700K

3000K

3500K

4000K

5000K

6000K

ITEM CODE CONFIGURATION

Sample Item Code **W09D3660H30N2BFNA**

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩



① Types

- W - Deco Line Wide Frame

② Styles

- 09 - Single Long Side Inset Frost

③ Lighting Styles

- D - Direct Light
- B - Direct & Indirect Light

④ Standard Sizes

- 2436-24"x36"
- 2448-24"x48"
- 3042-30"x42"
- 3048-30"x48"
- 3060-30"x60"
- 3648-36"x48"
- 3660-36"x60"
- 3672-36"x72"

- 4254-42"x54"
 - 4284-42"x84"
 - Custom 3173-31.4"x72.5"
- (Specify the accurate size in additional custom specification notes)

⑤ Outputs

- S - Standard Output (550 lumens/ft; 4.5 watts/ft)
- H - High Output (750 lumens/ft; 6 watts/ft)

⑥ LED CCT (All CRI 90+)

- 27 - 2700k
- 30 - 3000k
- 35 - 3500k
- 40 - 4000k
- 50 - 5000k
- 00 - Color Switchable (Only available with high output with touch sensor accessory or MTS)

⑦ Drivers

- V - 120-277VAC 0-10 Dimmable
 - E - 120-277VAC ELV Dimmable
 - N - 120-277VAC Non Dimming
- (Mirrors with touch sensors have to use a non-dimming driver)

⑧ Mounting

- 1 - Vertical
- 2 - Horizontal

⑨ Frame Colors

- BF - Black Frame
- SF - Silver Frame
- GF - Gold Frame

⑩ Accessories

- NA - None
- TS - Touch Sensor
- AN - Anti-fog & Night Light

- AF - Anti-fog
- NL - Night Light
- AL - Anti-fog, Night Light, Touch Sensor

- AT - Anti-fog & Touch Sensor
- NT - Night Light & Touch Sensor
- TR - Matrix Touch System

Additional Custom Specification

- Low-Iron Glasses
- Bluetooth Speakers
- DIY Touch Sensor Icons
- Powder Coated Chassis
- Antimicrobial Powder Coat
- Custom Inset & Frosting Sizes (Up to 2" for direct light styles)



2700K

3000K

3500K

4000K

5000K

6000K

ITEM CODE CONFIGURATION

Sample Item Code **W 1 0 I 2 4 4 8 S 4 0 N 1 B F N A**

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩



① Types

- W - Deco Line Wide Frame

② Styles

- 10 - Single Short Side Edge Frost

③ Lighting Styles

- D - Direct Light
- I - Indirect Light

④ Standard Sizes

- 2436-24"x36"
- 2448-24"x48"
- 3042-30"x42"
- 3048-30"x48"
- 3060-30"x60"
- 3648-36"x48"
- 3660-36"x60"
- 3672-36"x72"

- 4254-42"x54"
- 4284-42"x84"
- Custom 3173-31.4"x72.5"

(Specify the accurate size in additional custom specification notes)

⑤ Outputs

- S - Standard Output (550 lumens/ft; 4.5 watts/ft)
- H - High Output (750 lumens/ft; 6 watts/ft)

⑥ LED CCT (All CRI 90+)

- 27 - 2700k
- 30 - 3000k
- 35 - 3500k
- 40 - 4000k
- 50 - 5000k
- 00 - Color Switchable (Only available with high output with touch sensor accessory or MTS)

⑦ Drivers

- V - 120-277VAC 0-10 Dimmable
- E - 120-277VAC ELV Dimmable
- N - 120-277VAC Non Dimming

(Mirrors with touch sensors have to use a non-dimming driver)

⑧ Mounting

- 1 - Vertical
- 2 - Horizontal

⑨ Frame Colors

- BF - Black Frame
- SF - Silver Frame
- GF - Gold Frame

⑩ Accessories

- NA - None
- TS - Touch Sensor
- AN - Anti-fog & Night Light

- AF - Anti-fog
- NL - Night Light
- AL - Anti-fog, Night Light, Touch Sensor

- AT - Anti-fog & Touch Sensor
- NT - Night Light & Touch Sensor
- TR - Matrix Touch System

Additional Custom Specification

- Low-Iron Glasses
- Bluetooth Speakers

- DIY Touch Sensor Icons
- Powder Coated Chassis

- Antimicrobial Powder Coat
- Custom Inset & Frosting Sizes (Up to 2" for direct light styles)



2700K

3000K

3500K

4000K

5000K

6000K

ITEM CODE CONFIGURATION

Sample Item Code **W 1 1 D 2 4 4 8 H 4 0 N 1 S F N A**

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩



① Types

- W - Deco Line Wide Frame

② Styles

- 11 - Single Short Side Inset Frost

③ Lighting Styles

- D - Direct Light
- B - Direct & Indirect Light

④ Standard Sizes

- 2436-24"x36"
- 2448-24"x48"
- 3042-30"x42"
- 3048-30"x48"
- 3060-30"x60"
- 3648-36"x48"
- 3660-36"x60"
- 3672-36"x72"

- 4254-42"x54"
 - 4284-42"x84"
 - Custom 3173-31.4"x72.5"
- (Specify the accurate size in additional custom specification notes)

⑤ Outputs

- S - Standard Output (550 lumens/ft; 4.5 watts/ft)
- H - High Output (750 lumens/ft; 6 watts/ft)

⑥ LED CCT (All CRI 90+)

- 27 - 2700k
- 30 - 3000k
- 35 - 3500k
- 40 - 4000k
- 50 - 5000k
- 00 - Color Switchable (Only available with high output with touch sensor accessory or MTS)

⑦ Drivers

- V - 120-277VAC 0-10 Dimmable
 - E - 120-277VAC ELV Dimmable
 - N - 120-277VAC Non Dimming
- (Mirrors with touch sensors have to use a non-dimming driver)

⑧ Mounting

- 1 - Vertical
- 2 - Horizontal

⑨ Frame Colors

- BF - Black Frame
- SF - Silver Frame
- GF - Gold Frame

⑩ Accessories


- NA - None
- TS - Touch Sensor
- AN - Anti-fog & Night Light

- AF - Anti-fog
- NL - Night Light
- AL - Anti-fog, Night Light, Touch Sensor

- AT - Anti-fog & Touch Sensor
- NT - Night Light & Touch Sensor
- TR - Matrix Touch System


Additional Custom Specification

- Low-Iron Glasses
- Bluetooth Speakers
- DIY Touch Sensor Icons
- Powder Coated Chassis
- Antimicrobial Powder Coat
- Custom Inset & Frosting Sizes (Up to 2" for direct light styles)

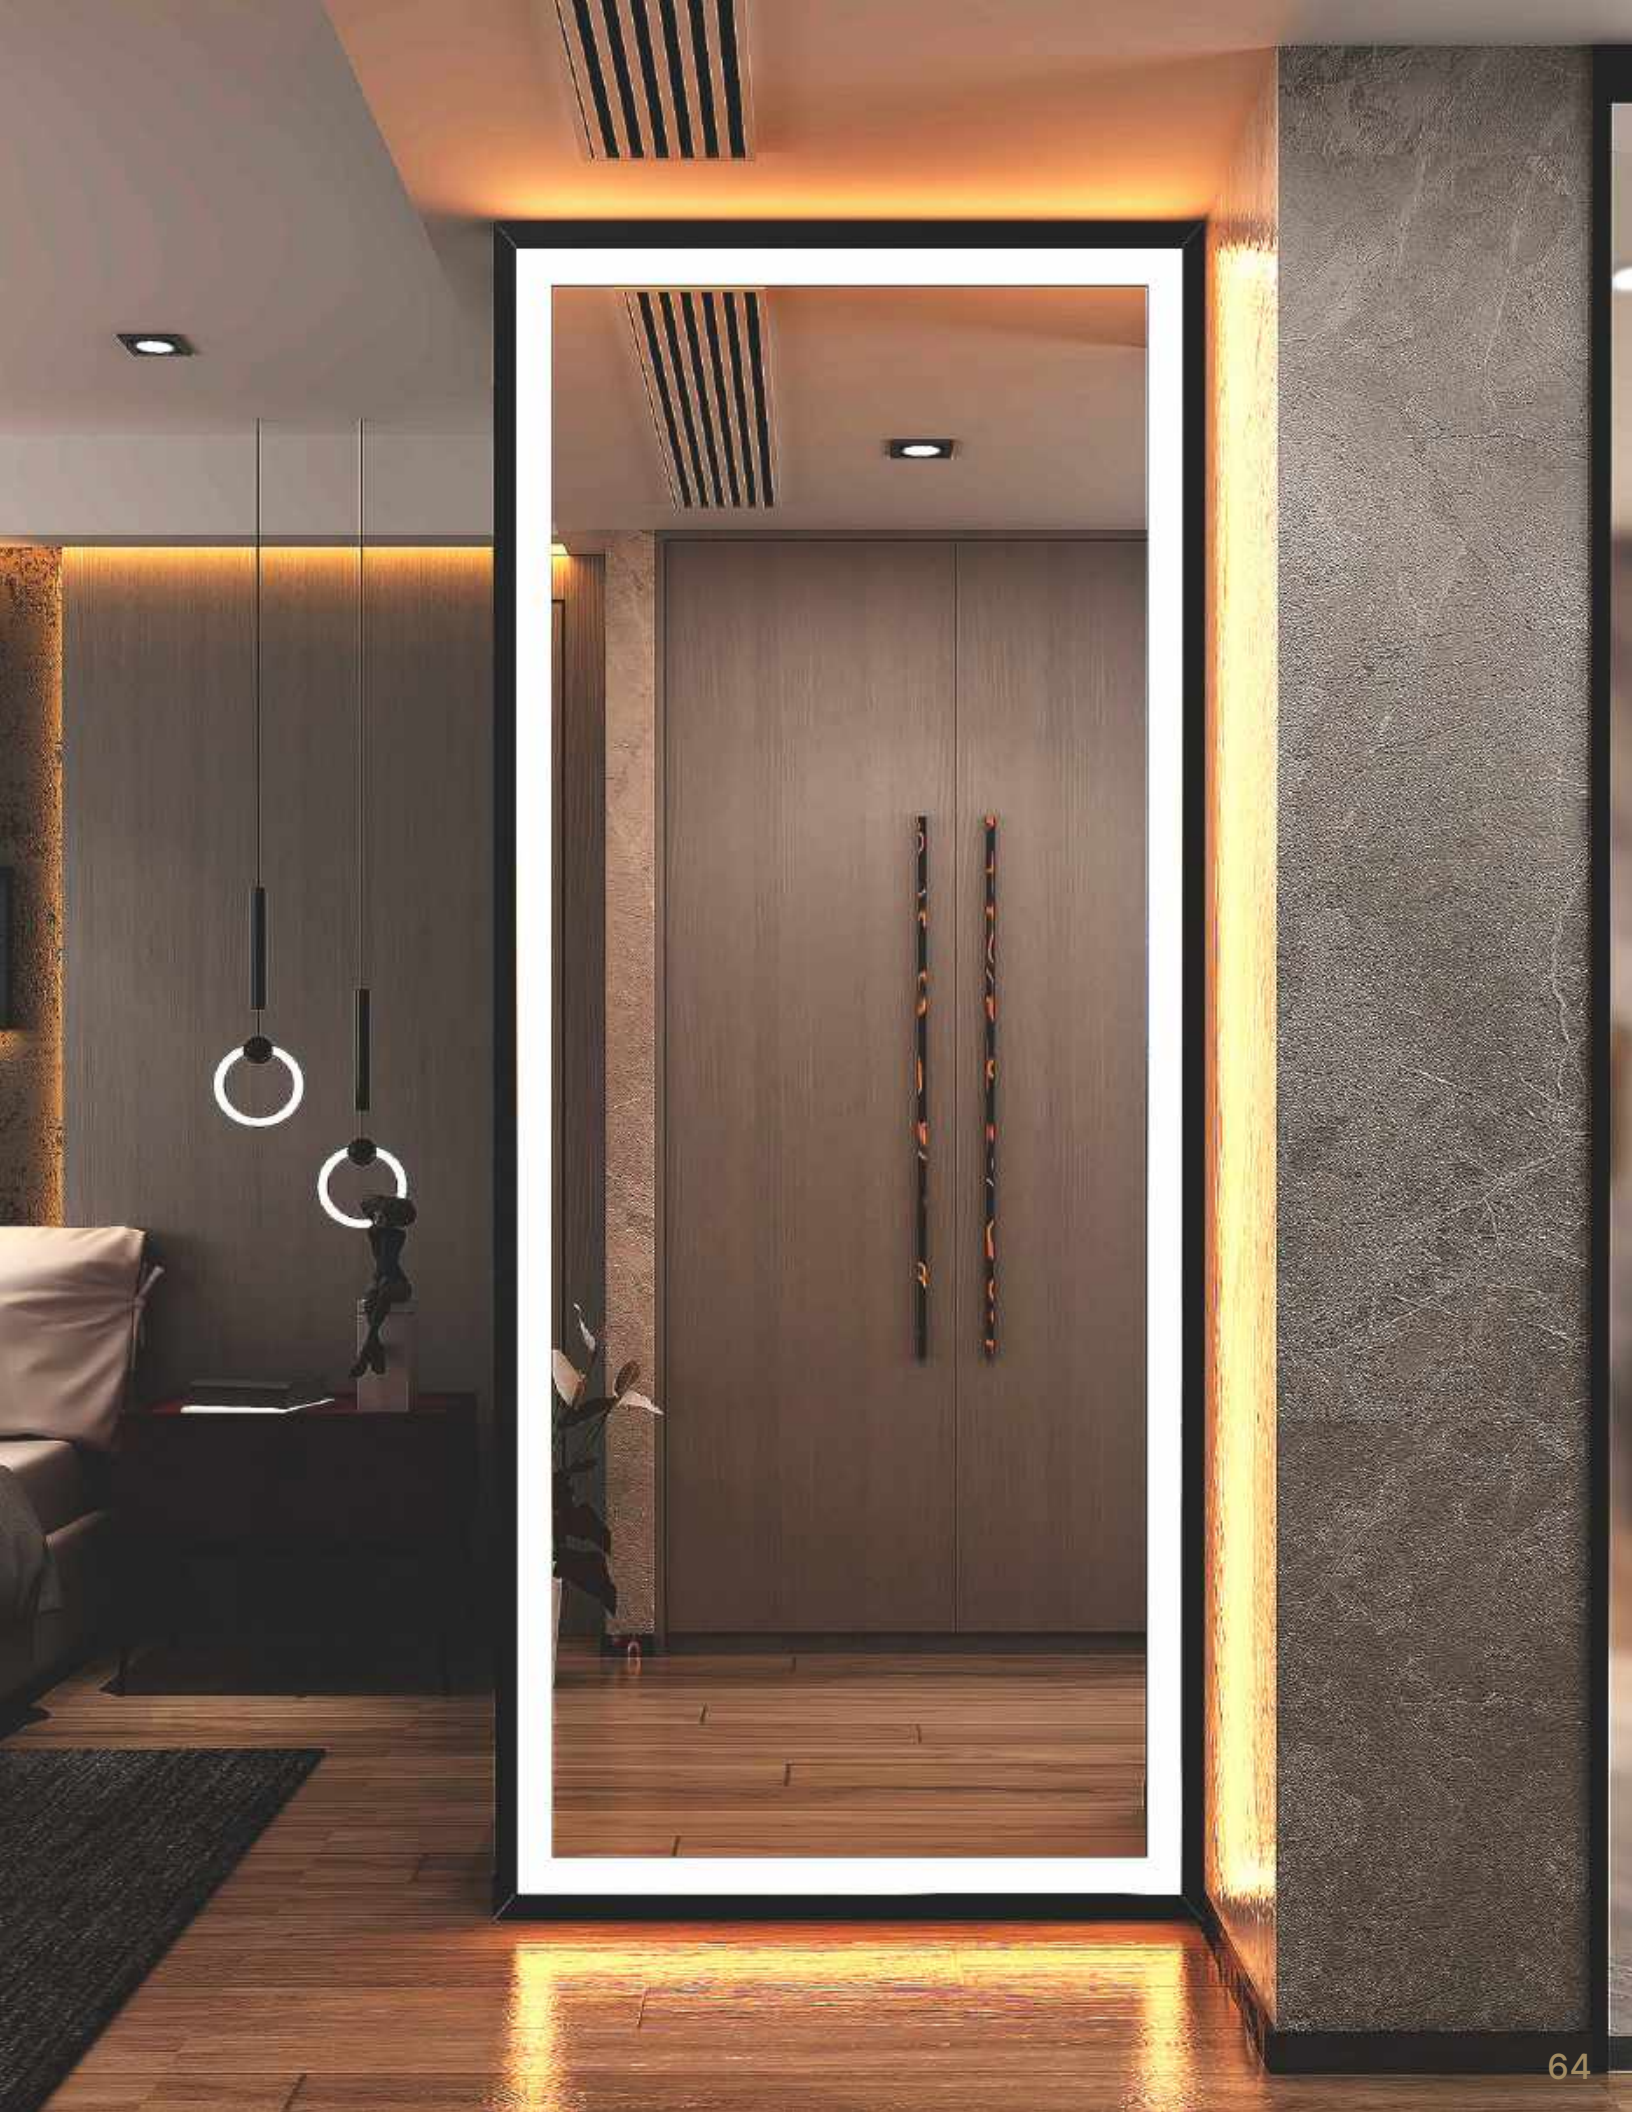





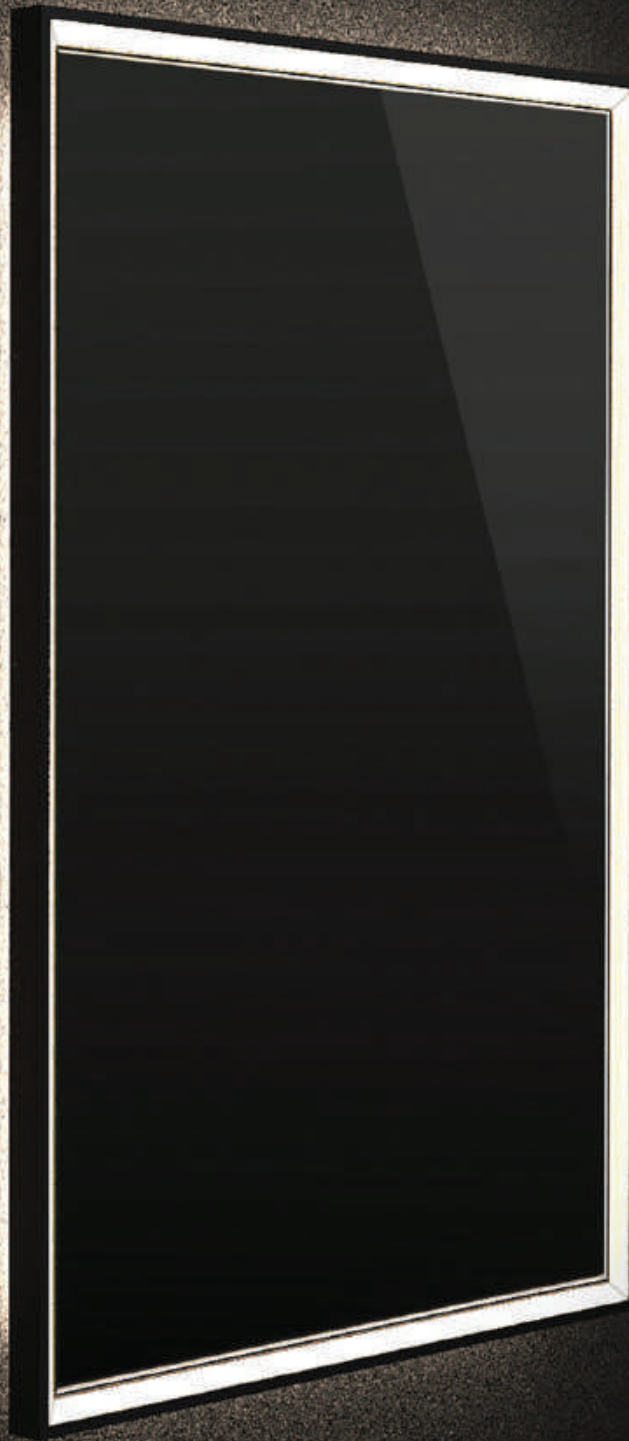


BRIGHT LINE .

Light in Frame



MADE IN THE USA.

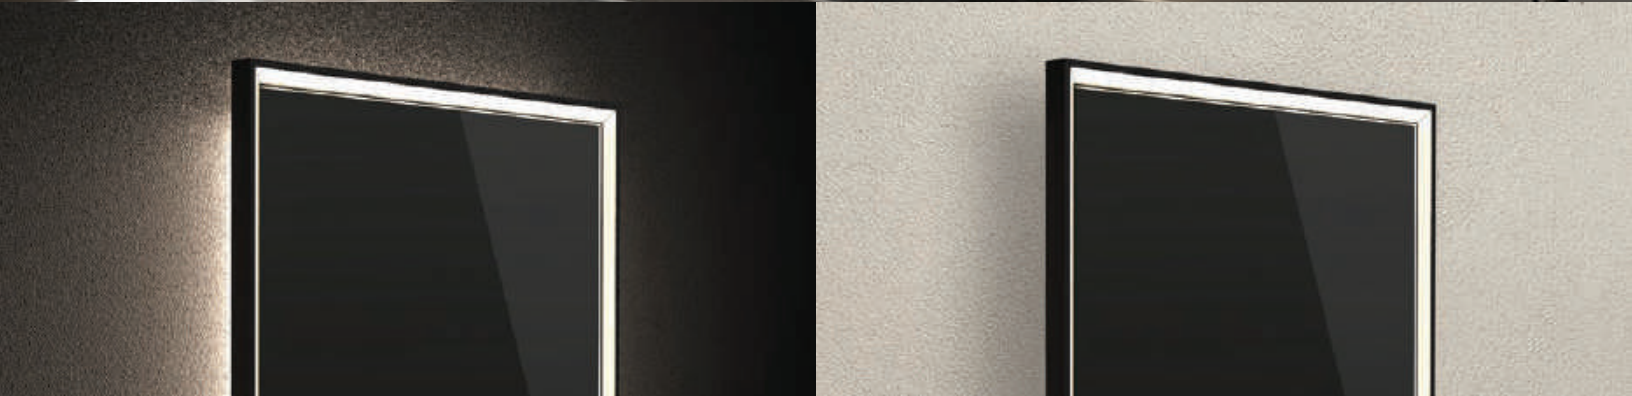

2700K

3000K

3500K

4000K

5000K

6000K

ITEM CODE CONFIGURATION

Sample Item Code

B 0 5 B 3 0 7 2 S 3 0 N 1 B F N A

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩



① Types

- B - Bright Line

② Styles

- 05 - Full Frame Inward Lighting

③ Lighting Styles

- D - Direct Inward Light
- B - Direct & Indirect Light

④ Standard Sizes

- 2436-24"x36"
- 2448-24"x48"
- 3042-30"x42"
- 3048-30"x48"
- 3060-30"x60"
- 3648-36"x48"
- 3660-36"x60"
- 3672-36"x72"
- 4254-42"x54"
- 4284-42"x84"
- Custom 3173-31.4"x72.5"

(Specify the accurate size in additional custom specification notes)

⑤ Outputs

- S - Standard Output
(550 lumens/ft; 4.5 watts/ft)
- H - High Output
(750 lumens/ft; 6 watts/ft)

⑥ LED CCT (All CRI 90+)

- 27 - 2700k
- 30 - 3000k
- 35 - 3500k
- 40 - 4000k
- 50 - 5000k
- 00 - Color Switchable
(Only available with high output with touch sensor accessory or MTS)

⑦ Drivers

- V - 120-277VAC 0-10 Dimmable
- E - 120-277VAC ELV Dimmable
- N - 120-277VAC Non Dimming

(Mirrors with touch sensors have to use a non-dimming driver)

⑧ Mounting

- 1 - Vertical
- 2 - Horizontal

⑨ Frame Colors

- BF - Black Frame
- SF - Silver Frame
- GF - Gold Frame

⑩ Accessories

- NA - None
- TS - Touch Sensor
- AN - Anti-fog & Night Light

- AF - Anti-fog
- NL - Night Light
- AL - Anti-fog, Night Light, Touch Sensor

- AT - Anti-fog & Touch Sensor
- NT - Night Light & Touch Sensor
- TR - Matrix Touch System

Additional Custom Specification

- Low-Iron Glasses
- Bluetooth Speakers
- DIY Touch Sensor Icons
- Powder Coated Chassis
- Antimicrobial Powder Coat
- Custom Inset & Frosting Sizes (Up to 2" for direct light styles)



ANTI-LIGATURE ■



MADE IN THE USA.



2700K

3000K

3500K

4000K

5000K

6000K

ITEM CODE CONFIGURATION

Sample Item Code **L 33 D 2436 S 30 N 1 WF NA**

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩



IP65



IK10



① Types

- L - Anti-Ligature

② Styles

- 33 - Double Long Side Inset Frost

③ Lighting Styles

- D - Direct Light

④ Standard Sizes

- 2030-20"x30"
- 2436-24"x36"

⑤ Outputs

- S - Standard Output
(550 lumens/ft; 4.5 watts/ft)

⑥ LED CCT (All CRI 90+)

- 27 - 2700k
- 30 - 3000k
- 35 - 3500k
- 40 - 4000k
- 50 - 5000k

⑦ Drivers

- V - 120-277VAC 0-10 Dimmable
- N - 120-277VAC Non Dimming

⑧ Mounting

- 1 - Vertical

⑨ Frame Colors

- BF - Black Frame
- WF - White Frame
- SF - Silver Frame

⑩ Accessories

- NA - None
- NL - Night Light (Circadian Rhythm Amber Color)

Additional Custom Specification

- Antimicrobial Powder Coated Frame



CUSTOM MIRRORS .




MADE IN THE USA.







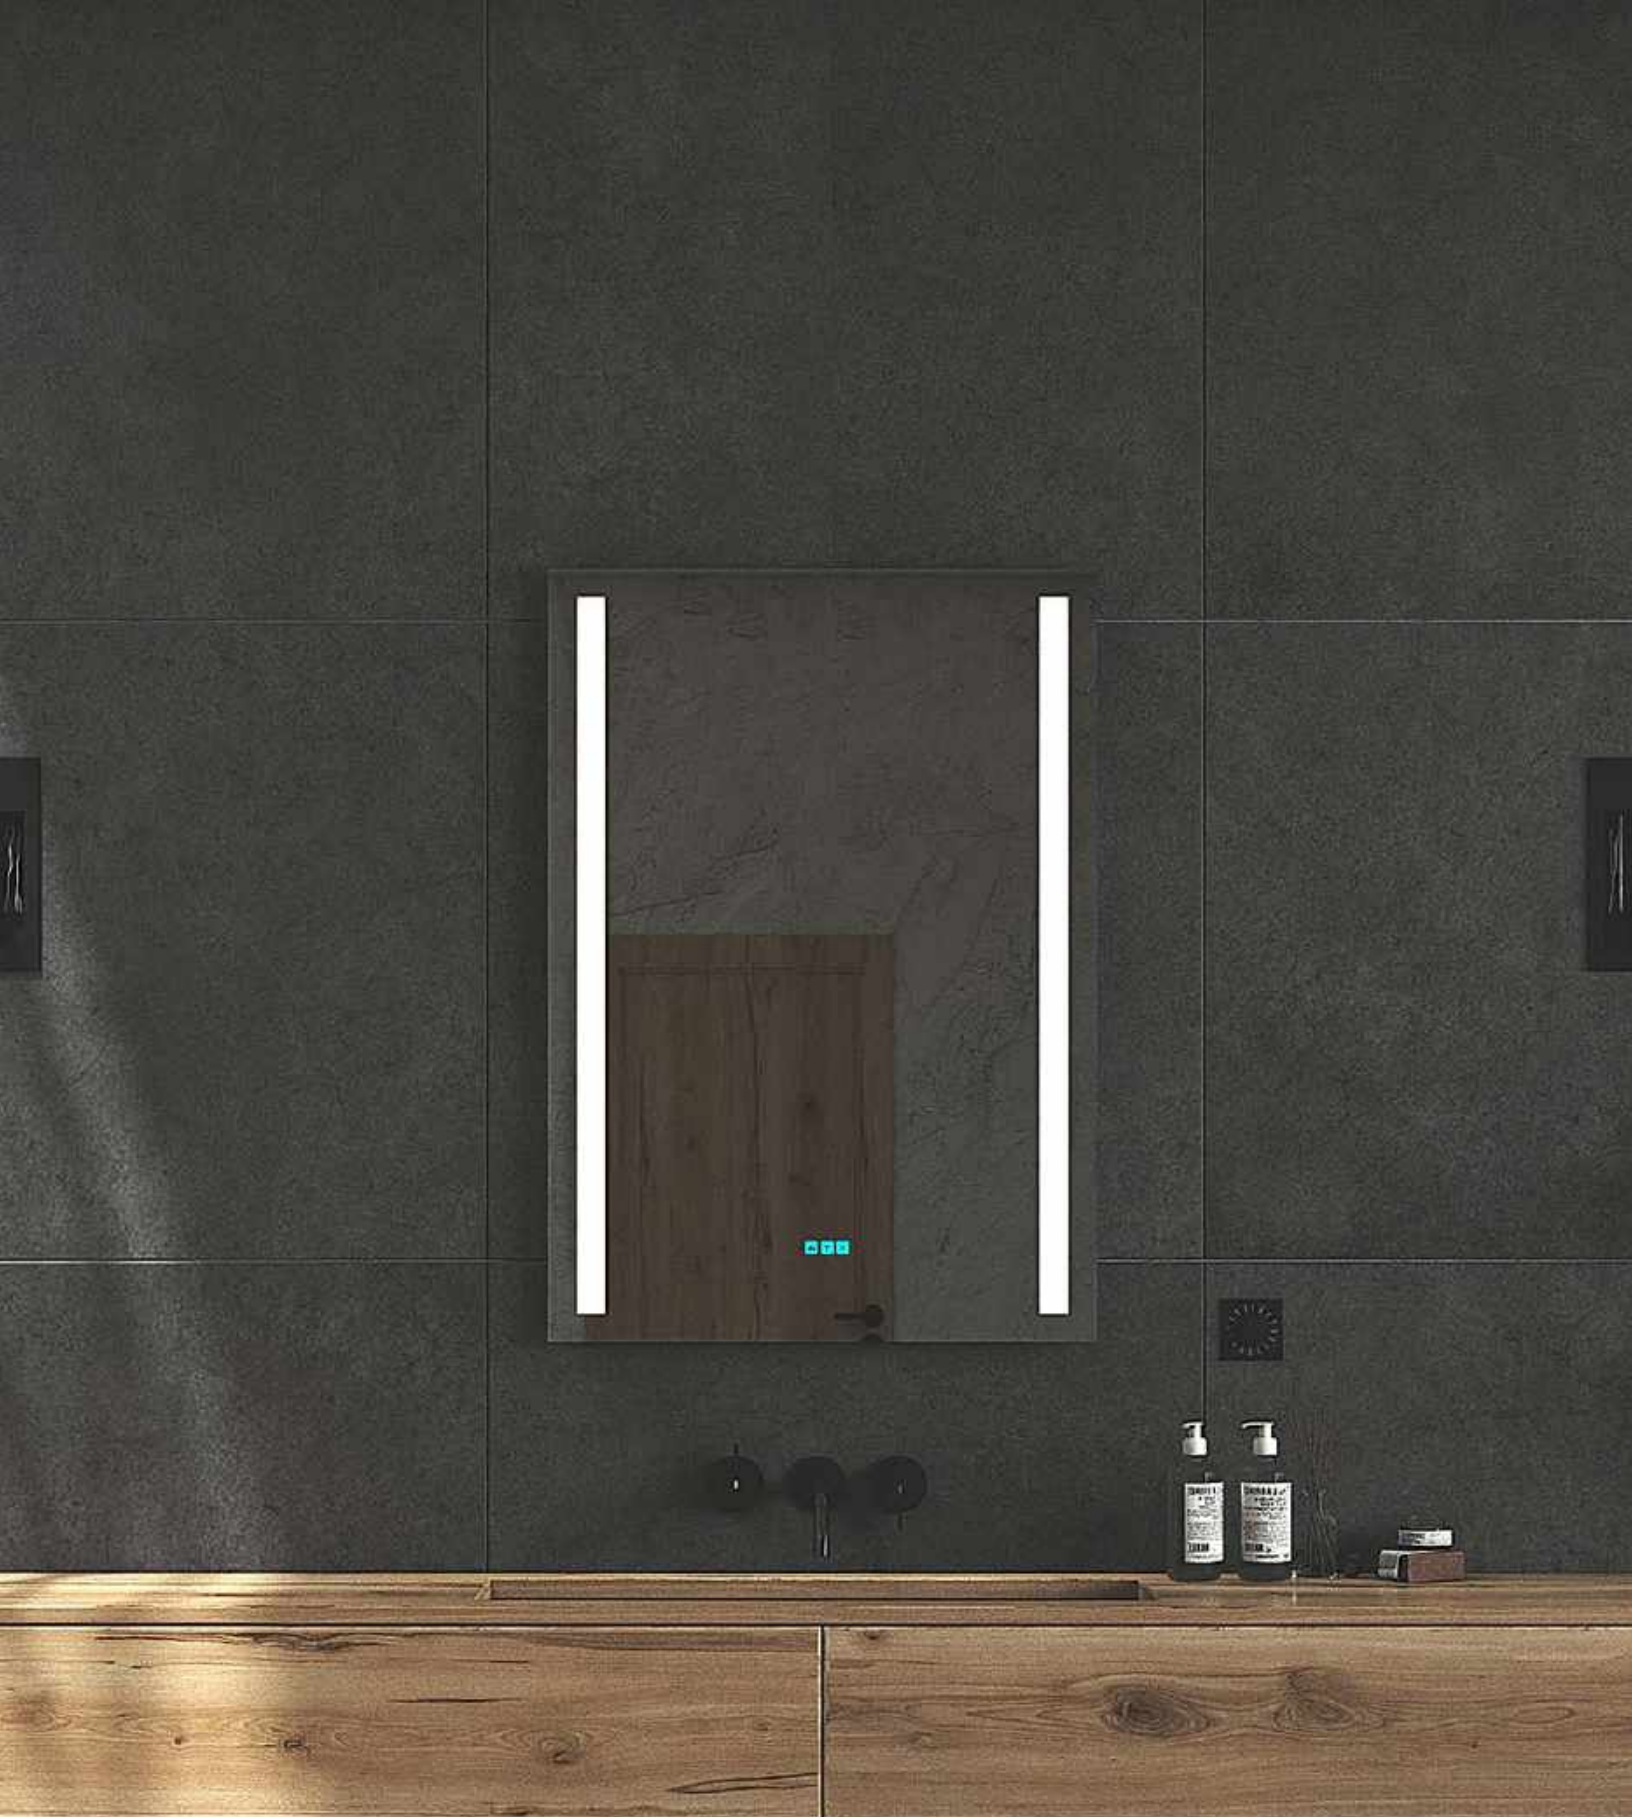

ACCESSORIES .



MADE IN THE USA.

TOUCH SENSOR



1 Key Touch Sensor

- On/Off Dim
- Color Temperature Switchable between 2700k to 6500k

Direct / Indirect Light Mirrors



Direct/
Indirect Light

Direct & Indirect Light Mirrors



Direct
Light



Indirect
Light



Matrix Touch System

- On/Off Dim
- Color Temperature Tunable between 2700k to 6500k
- Demister




On/Off
Hold to Dim

Tap to Switch
Hold to Tune

Demister



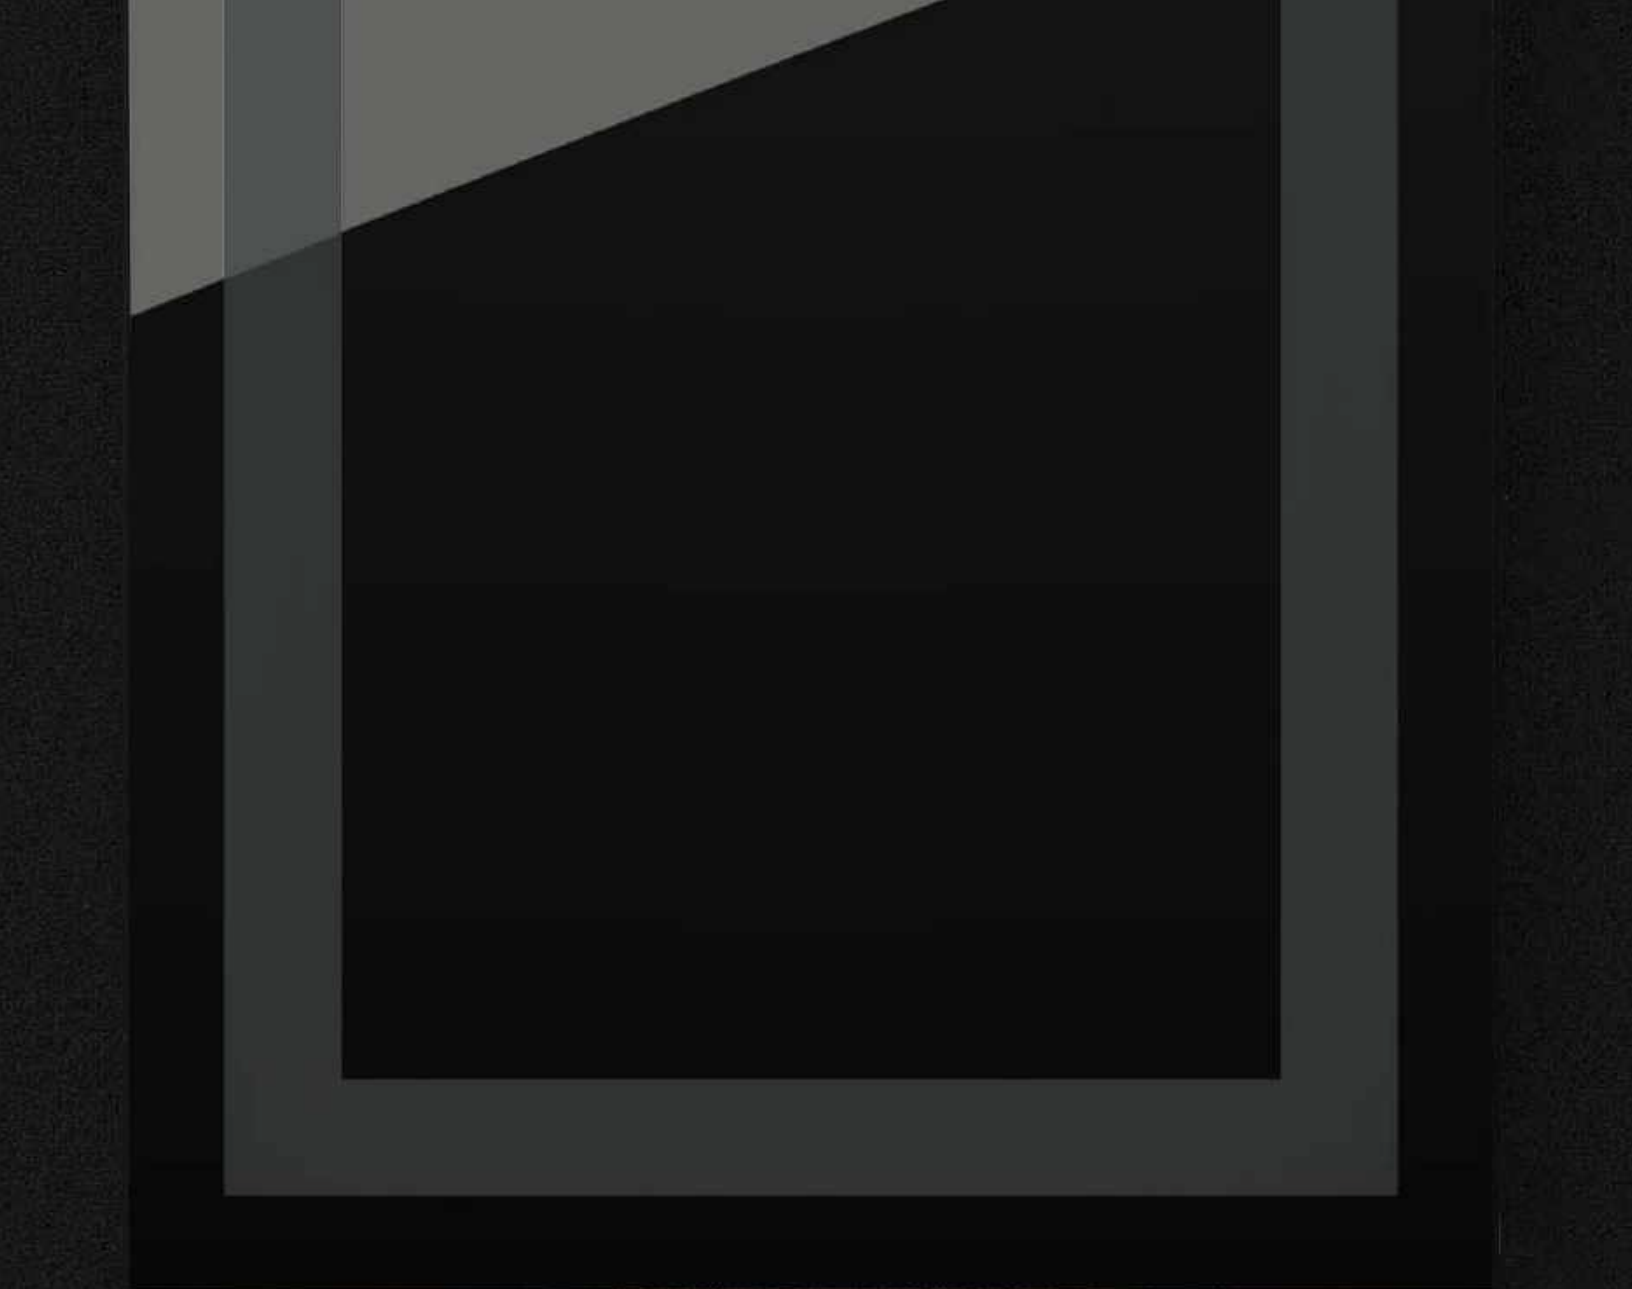

NIGHT LIGHT.

Photocell

The light sensing photocell **detects low-light** environments and **activates a dim LED light** located at the bottom of the mirror. When the light levels in the room increase the photocell will automatically switch the night light LED off.

Available Styles

The Night Light is available with most items in the Classic/Deco/Future Lines. The exceptions are Direct light styles (**02, 04, 08, 10**) and Classic Indirect style (**L21, L51**).



DEMISTER ■

Connection Options

- On Touch Sensor
- On Hard Wire

Size Changes Depend on Mirror Size

- | | | |
|-------------|-------------|-------------|
| • 12" x 12" | • 16" x 16" | • 18" x 22" |
| • 12" x 18" | • 16" x 28" | • 18" x 34" |

HOW TO FIND US .

SHOWROOMS

See a display and work directly with lighting design experts at one of our showroom partner locations. Visit matrixmirrors.com to find a showroom in your area.

REPRESENTATIVES

For specification and distributions sales, contact one of our sales agencies. They can assist with any project from single units to hundreds. Visit matrixmirrors.com to find your regional sales rep.



MATRIX MIRRORS SITE



MADE IN THE USA • MODERN • LUXURIOUS

(678) 580-5717

www.matrixmirrors.com

admin@matrixmirrors.com

6464 Warren Dr, Norcross, GA 30093