


Please punch holes before the dashed line

Future Deco Line

R11b direct & indirect

MATRIX
MIRRORS

 Made in the USA

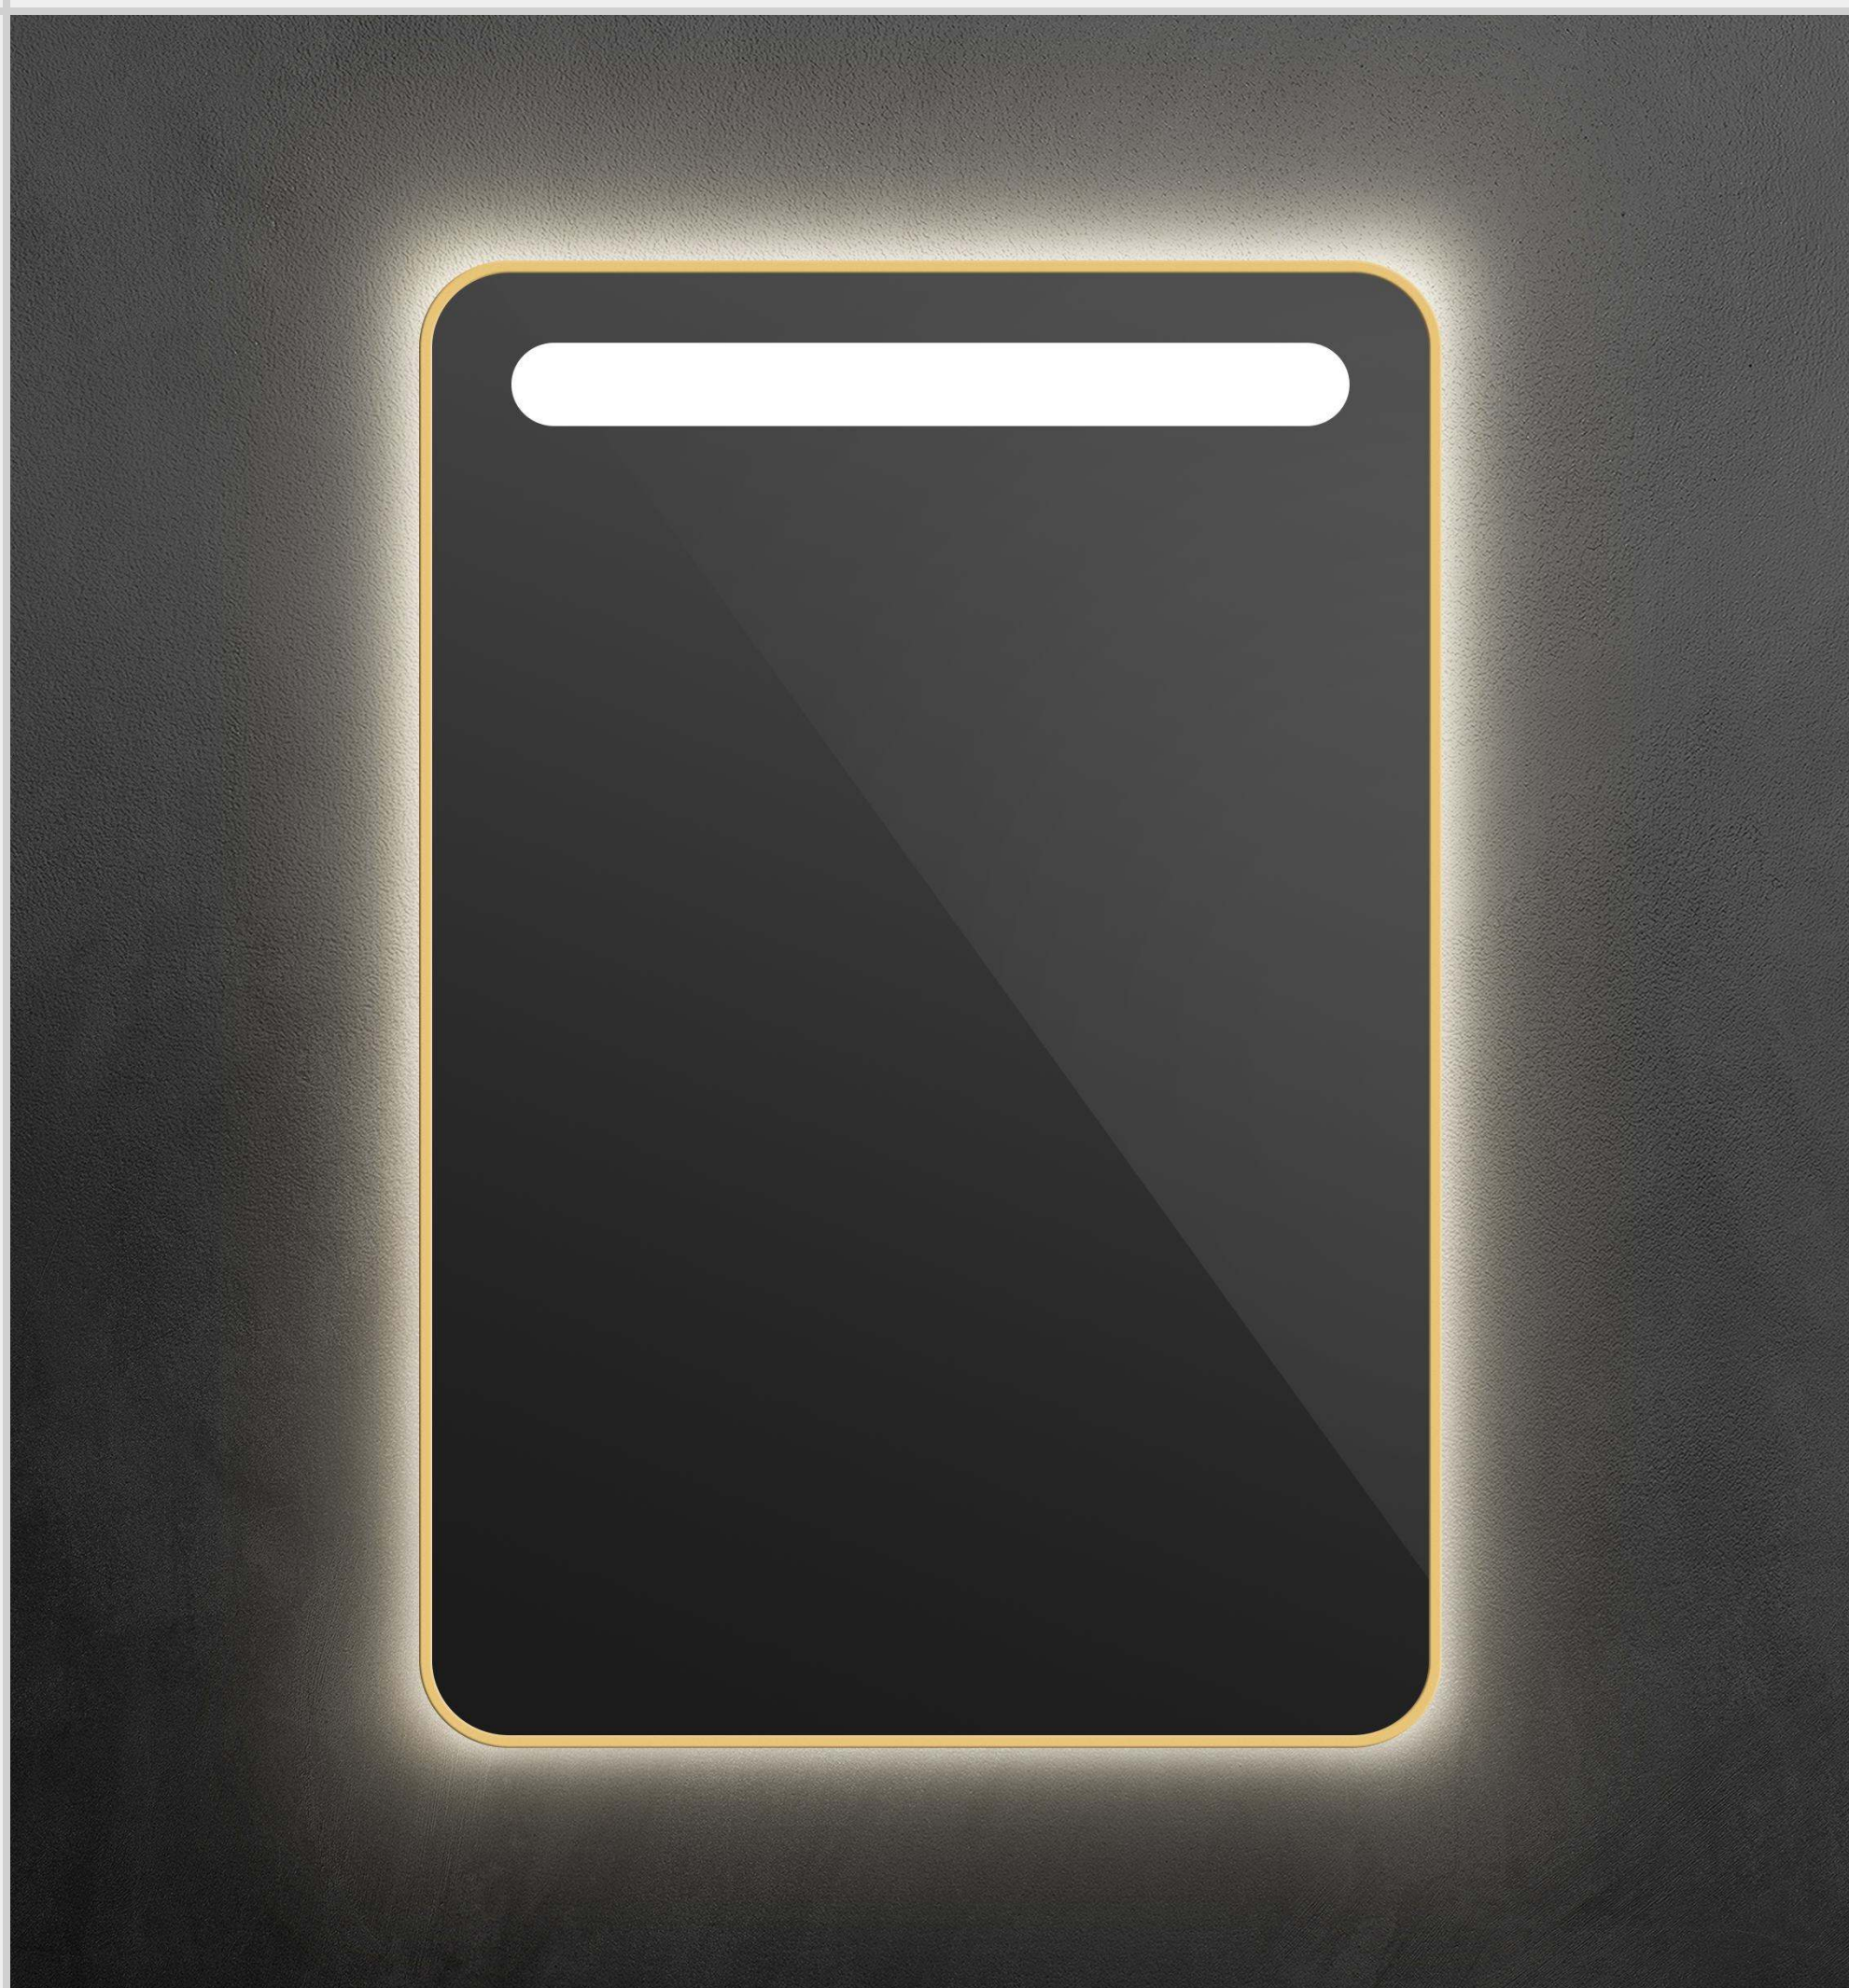

ITEM CODE

R 1 1 b

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩



Additional Custom Specification Notes ⑪

(specify the accurate size in additional custom specification notes)

① Types

- R - Future Deco Line

② Styles

- 11 - Single Short Side Inset Frost

③ Lighting Styles

- b - Direct & Indirect Light

④ Glass Sizes

- | | | |
|--------------------|--------------------|--|
| • 2436 - 24" x 36" | • 3060 - 30" x 60" | • 4254 - 42" x 54" |
| • 2448 - 24" x 48" | • 3648 - 36" x 48" | • 4284 - 42" x 84" |
| • 3042 - 30" x 42" | • 3660 - 36" x 60" | • Custom (Ex: 3173 - 31.4" x 72.5") |
| • 3048 - 30" x 48" | • 3672 - 36" x 72" | (specify the accurate size in additional custom specification notes) |

⑤ Outputs

- | | |
|--|--|
| • S - Standard Output
(550 lumens/ft; 4.5 watts/ft) | Account for approximately 50% -60% light loss factor <ul style="list-style-type: none">• 60% for direct lighting• 50% for indirect lighting |
| • H - High Output
(750 lumens/ft; 6 watts/ft) | Use frost size on page 2 to calculate linear footage |

⑥ Color Temperatures

- 00 - Color Switchable 2700k-6500k (90+ CRI)
(Only available with high output with **Touch Sensor** accessory)
- 00 - Color Switchable 1800k-6500k (90+ CRI)
(Only available with high output with **CCT Sync** accessory)
- 27 - 2700k (90+ CRI)
- 30 - 3000k (90+ CRI)
- 35 - 3500k (90+ CRI)
- 40 - 4000k (90+ CRI)
- 50 - 5000k (90+ CRI)

⑦ Drivers

- V - 100-277VAC 0-10 Dimmable
- E - 100-277VAC ELV Dimmable
- N - 100-277VAC Non-Dimming
(Mirrors with touch sensor have to use a non-dimming driver)

⑧ Mounting

- 1 - Vertical
- 2 - Horizontal

⑨ Frame Colors

- BF - Black Frame
- GF - Gold Frame
- SF - Silver Frame
- WF - White Frame
- BR - Bronze Frame
- CF - Custom Frame
(specify color on website)

⑨ Accessories

- | | | |
|--------------------------|---|---|
| • NA - None | • AT - Anti-Fog & Touch Sensor | • CT - CCT Sync Switch |
| • TS - Touch Sensor | • NT - Night Light & Touch Sensor | • CF - CCT Sync & Anti-Fog |
| • AF - Anti-Fog Demister | • AN - Anti Fog & Night Light | • CN - CCT Sync & Night Light |
| • NL - Night Light | • AL - Anti-Fog, Night Light & Touch Sensor | • CL - CCT Sync, Anti-Fog & Night Light |

⑩ Additional Custom Specification Notes

- | | | | |
|------------------|-------------------------|-----------------------------|---|
| • Low-Iron Glass | • Powder Coated Chassis | • Antimicrobial Powder Coat | • Custom Inset & Frost Sizes (Up to 2 inches) |
|------------------|-------------------------|-----------------------------|---|

Please punch holes before the dashed line

MATRIX MIRRORS

ACCESSORY DESCRIPTIONS

Anti-Fog Demister (120v power supply)

Available Sizes

- 8" x 30"
 - 11" x 14"
 - 13" x 14"
- 12" x 18"
 - 18" x 22"
 - 18" x 34"

Controllers



Touch Sensors

- On/Off Dim
 - White when Lights ON
 - Orange when Lights OFF
 - Hold 2 seconds to turn Touch Sensor Light OFF
- Color Temperature Switchable between 2700k to 6500k
- Custom Logo available

Direct/ Indirect Styles




Direct & Indirect Styles

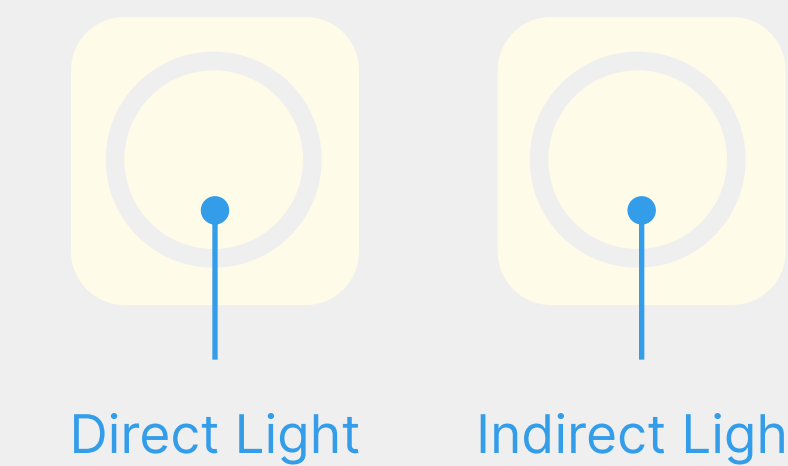

CCT Sync Switch


- Independent control of color temperature and light intensity
- Color Temperature Switchable between 1800k to 6500k
- Dimensions: 1.7"W x 4.15"H x 0.2"D

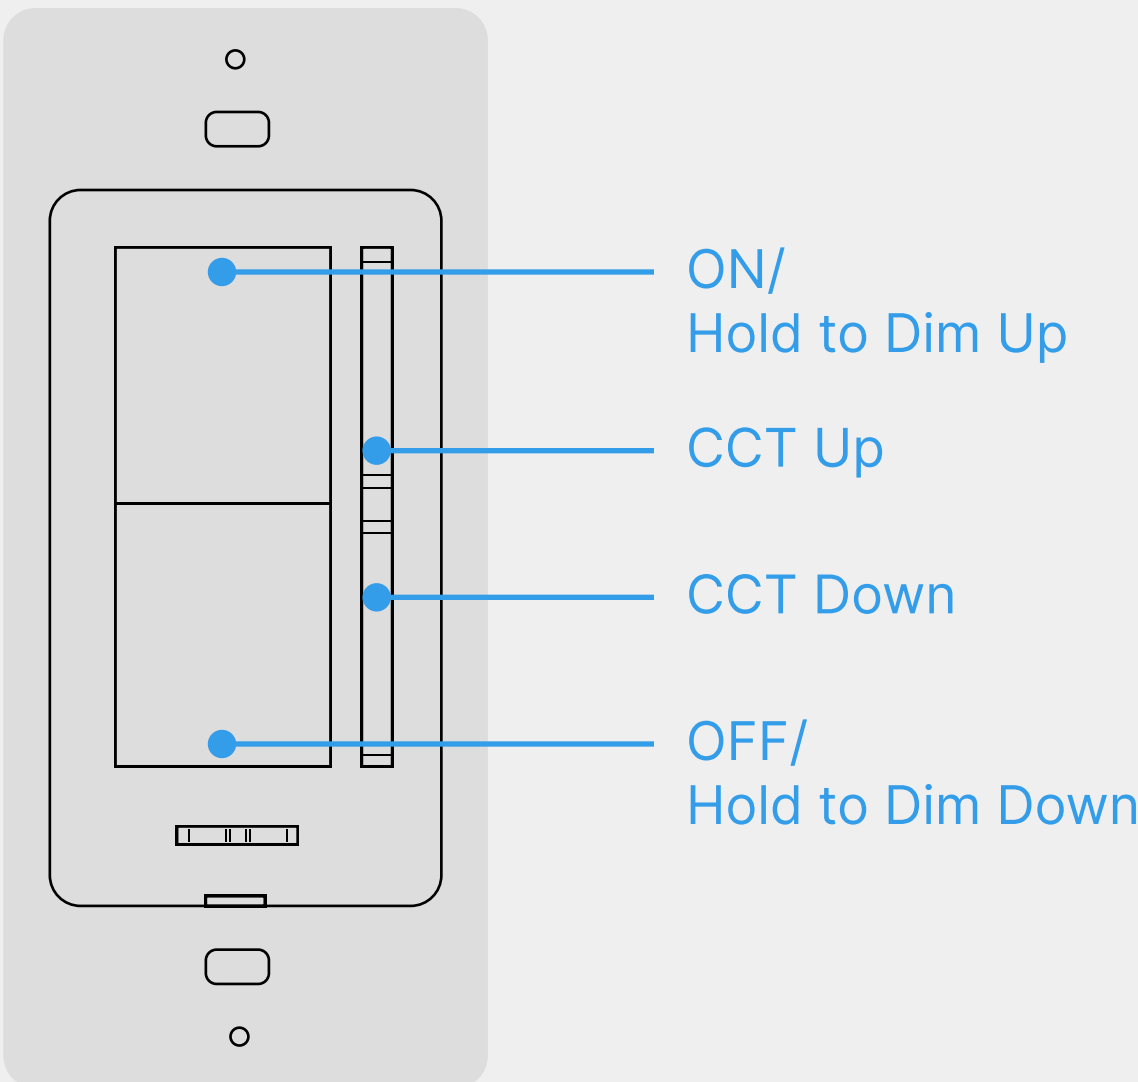


STANDARD SIZE (Dimensions in red are set)

UNIT: inch


Frost: 2.00	Depth: 1.688	Glass Width: X	Frame Width: X + 0.18
Inset: 2.00	Radius: 2.00	Glass Height: Y	Frame Height: Y + 0.18

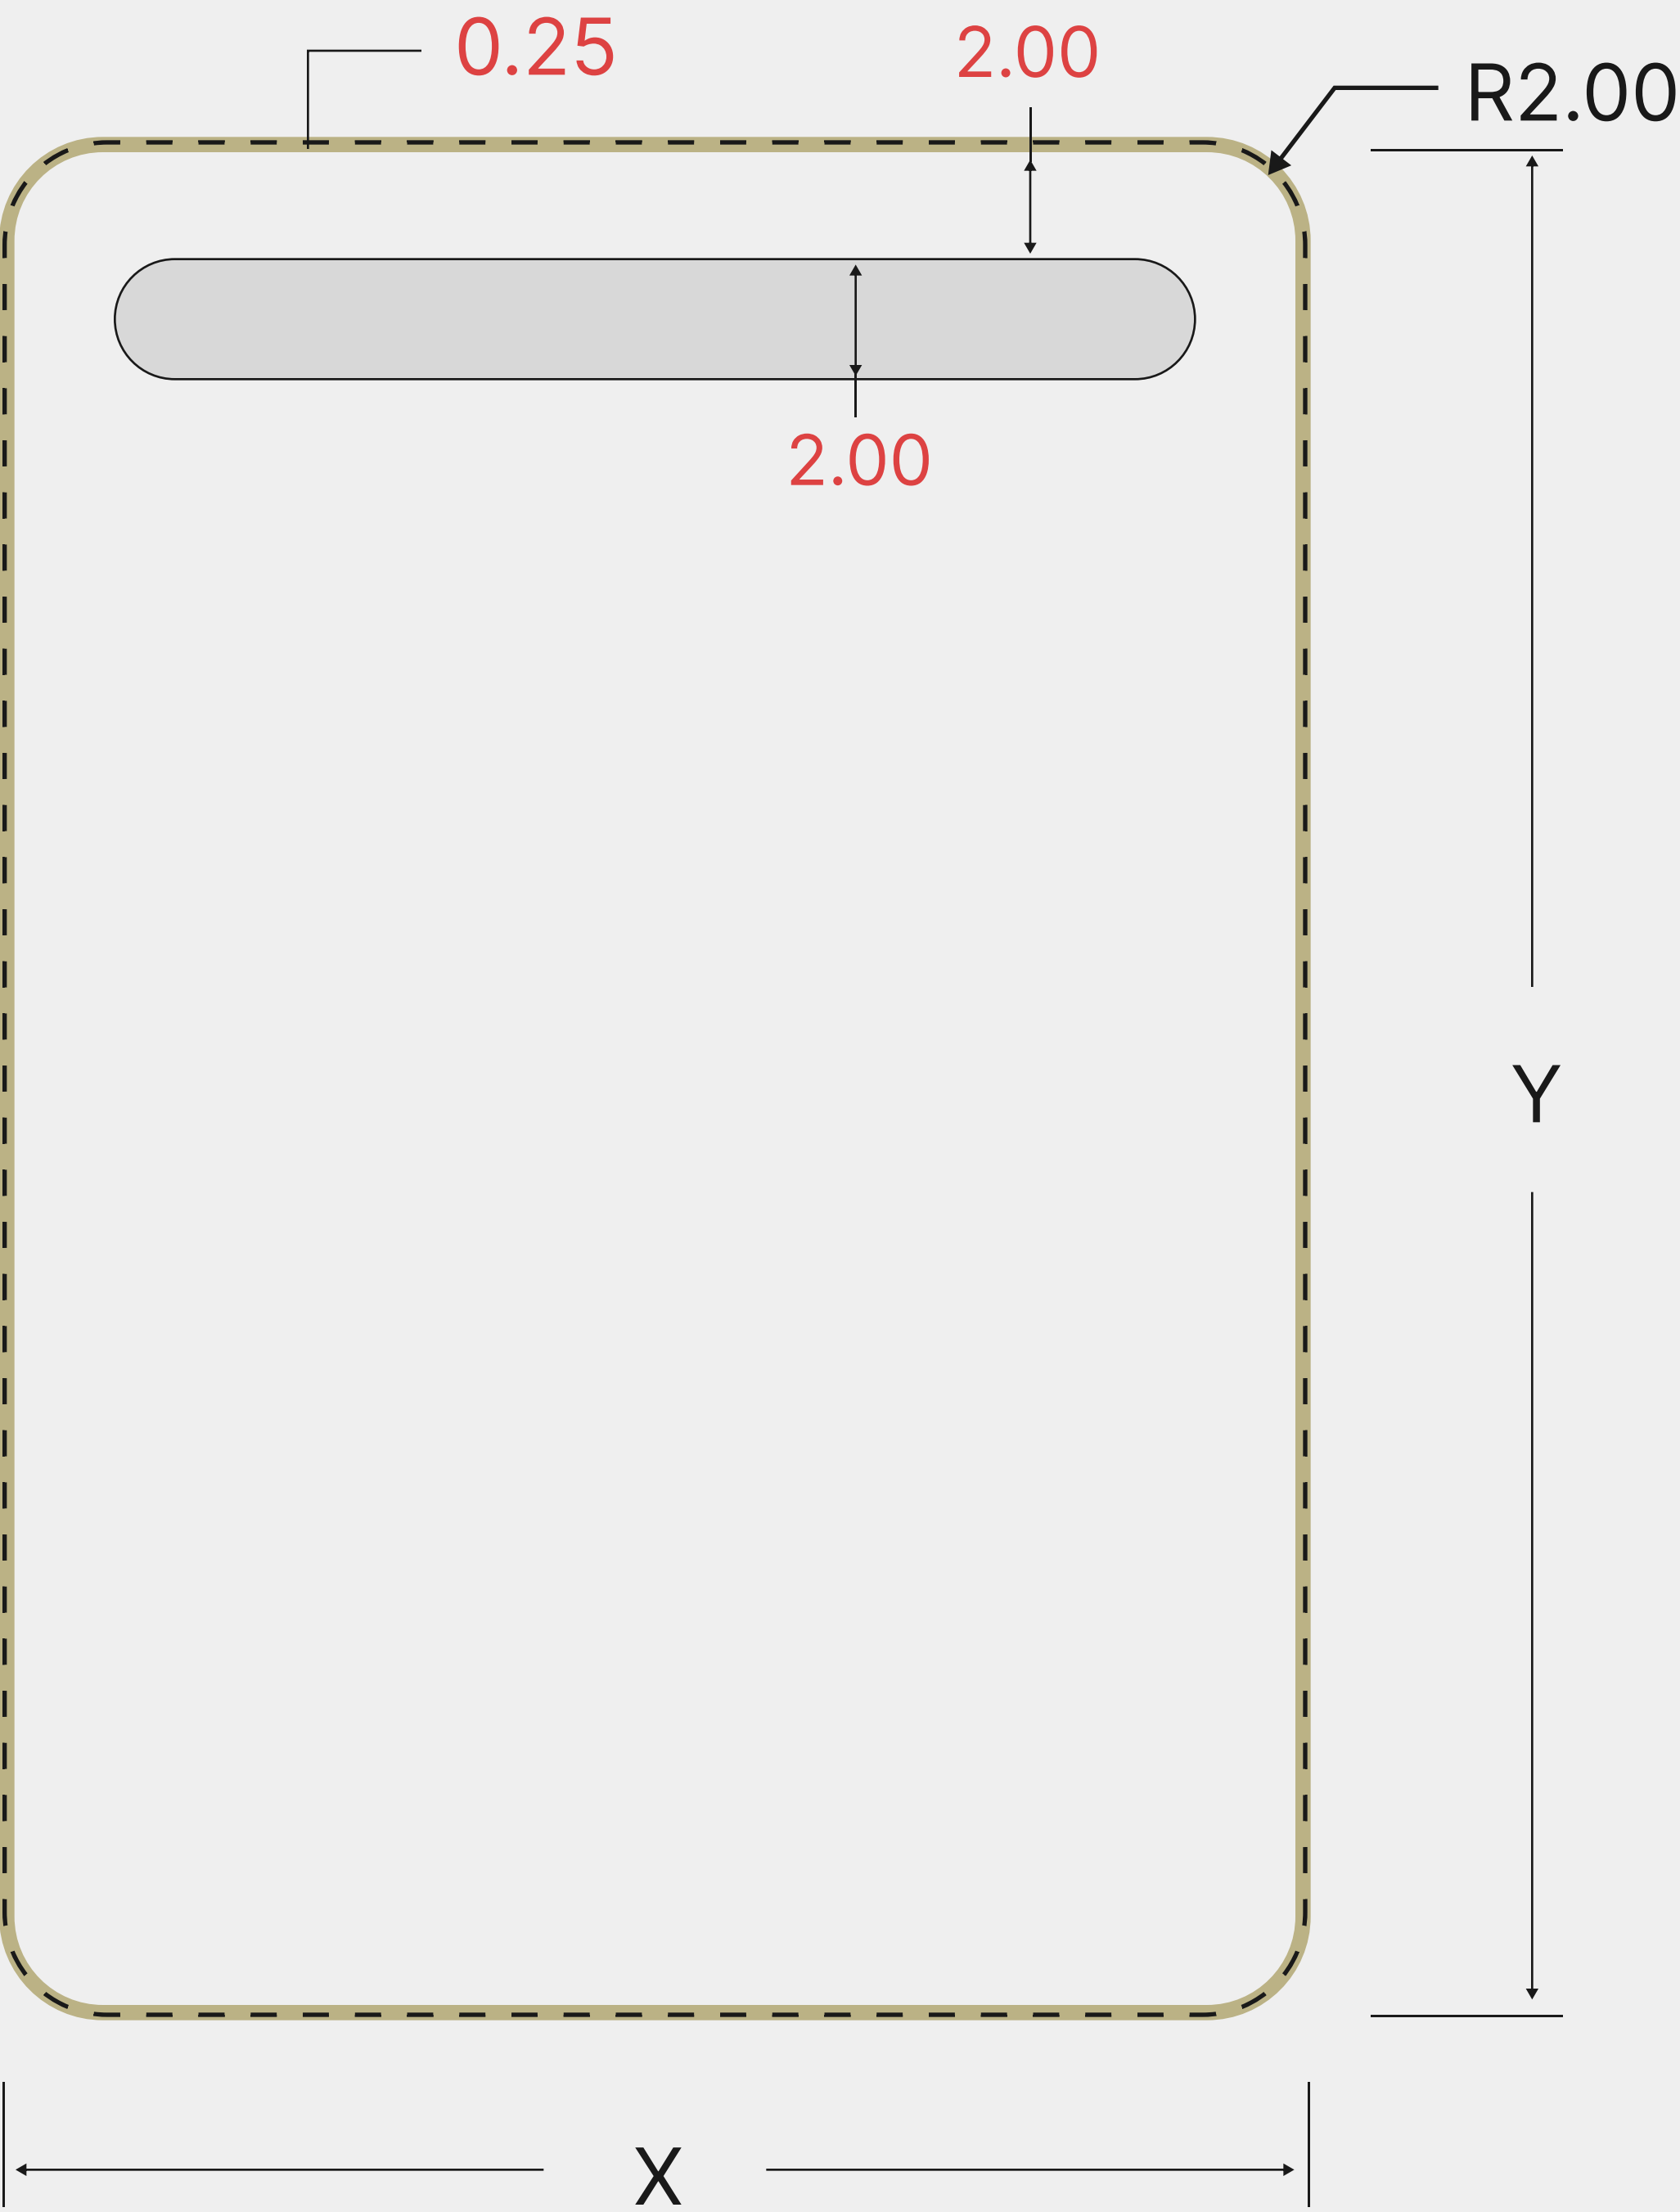

FRONT

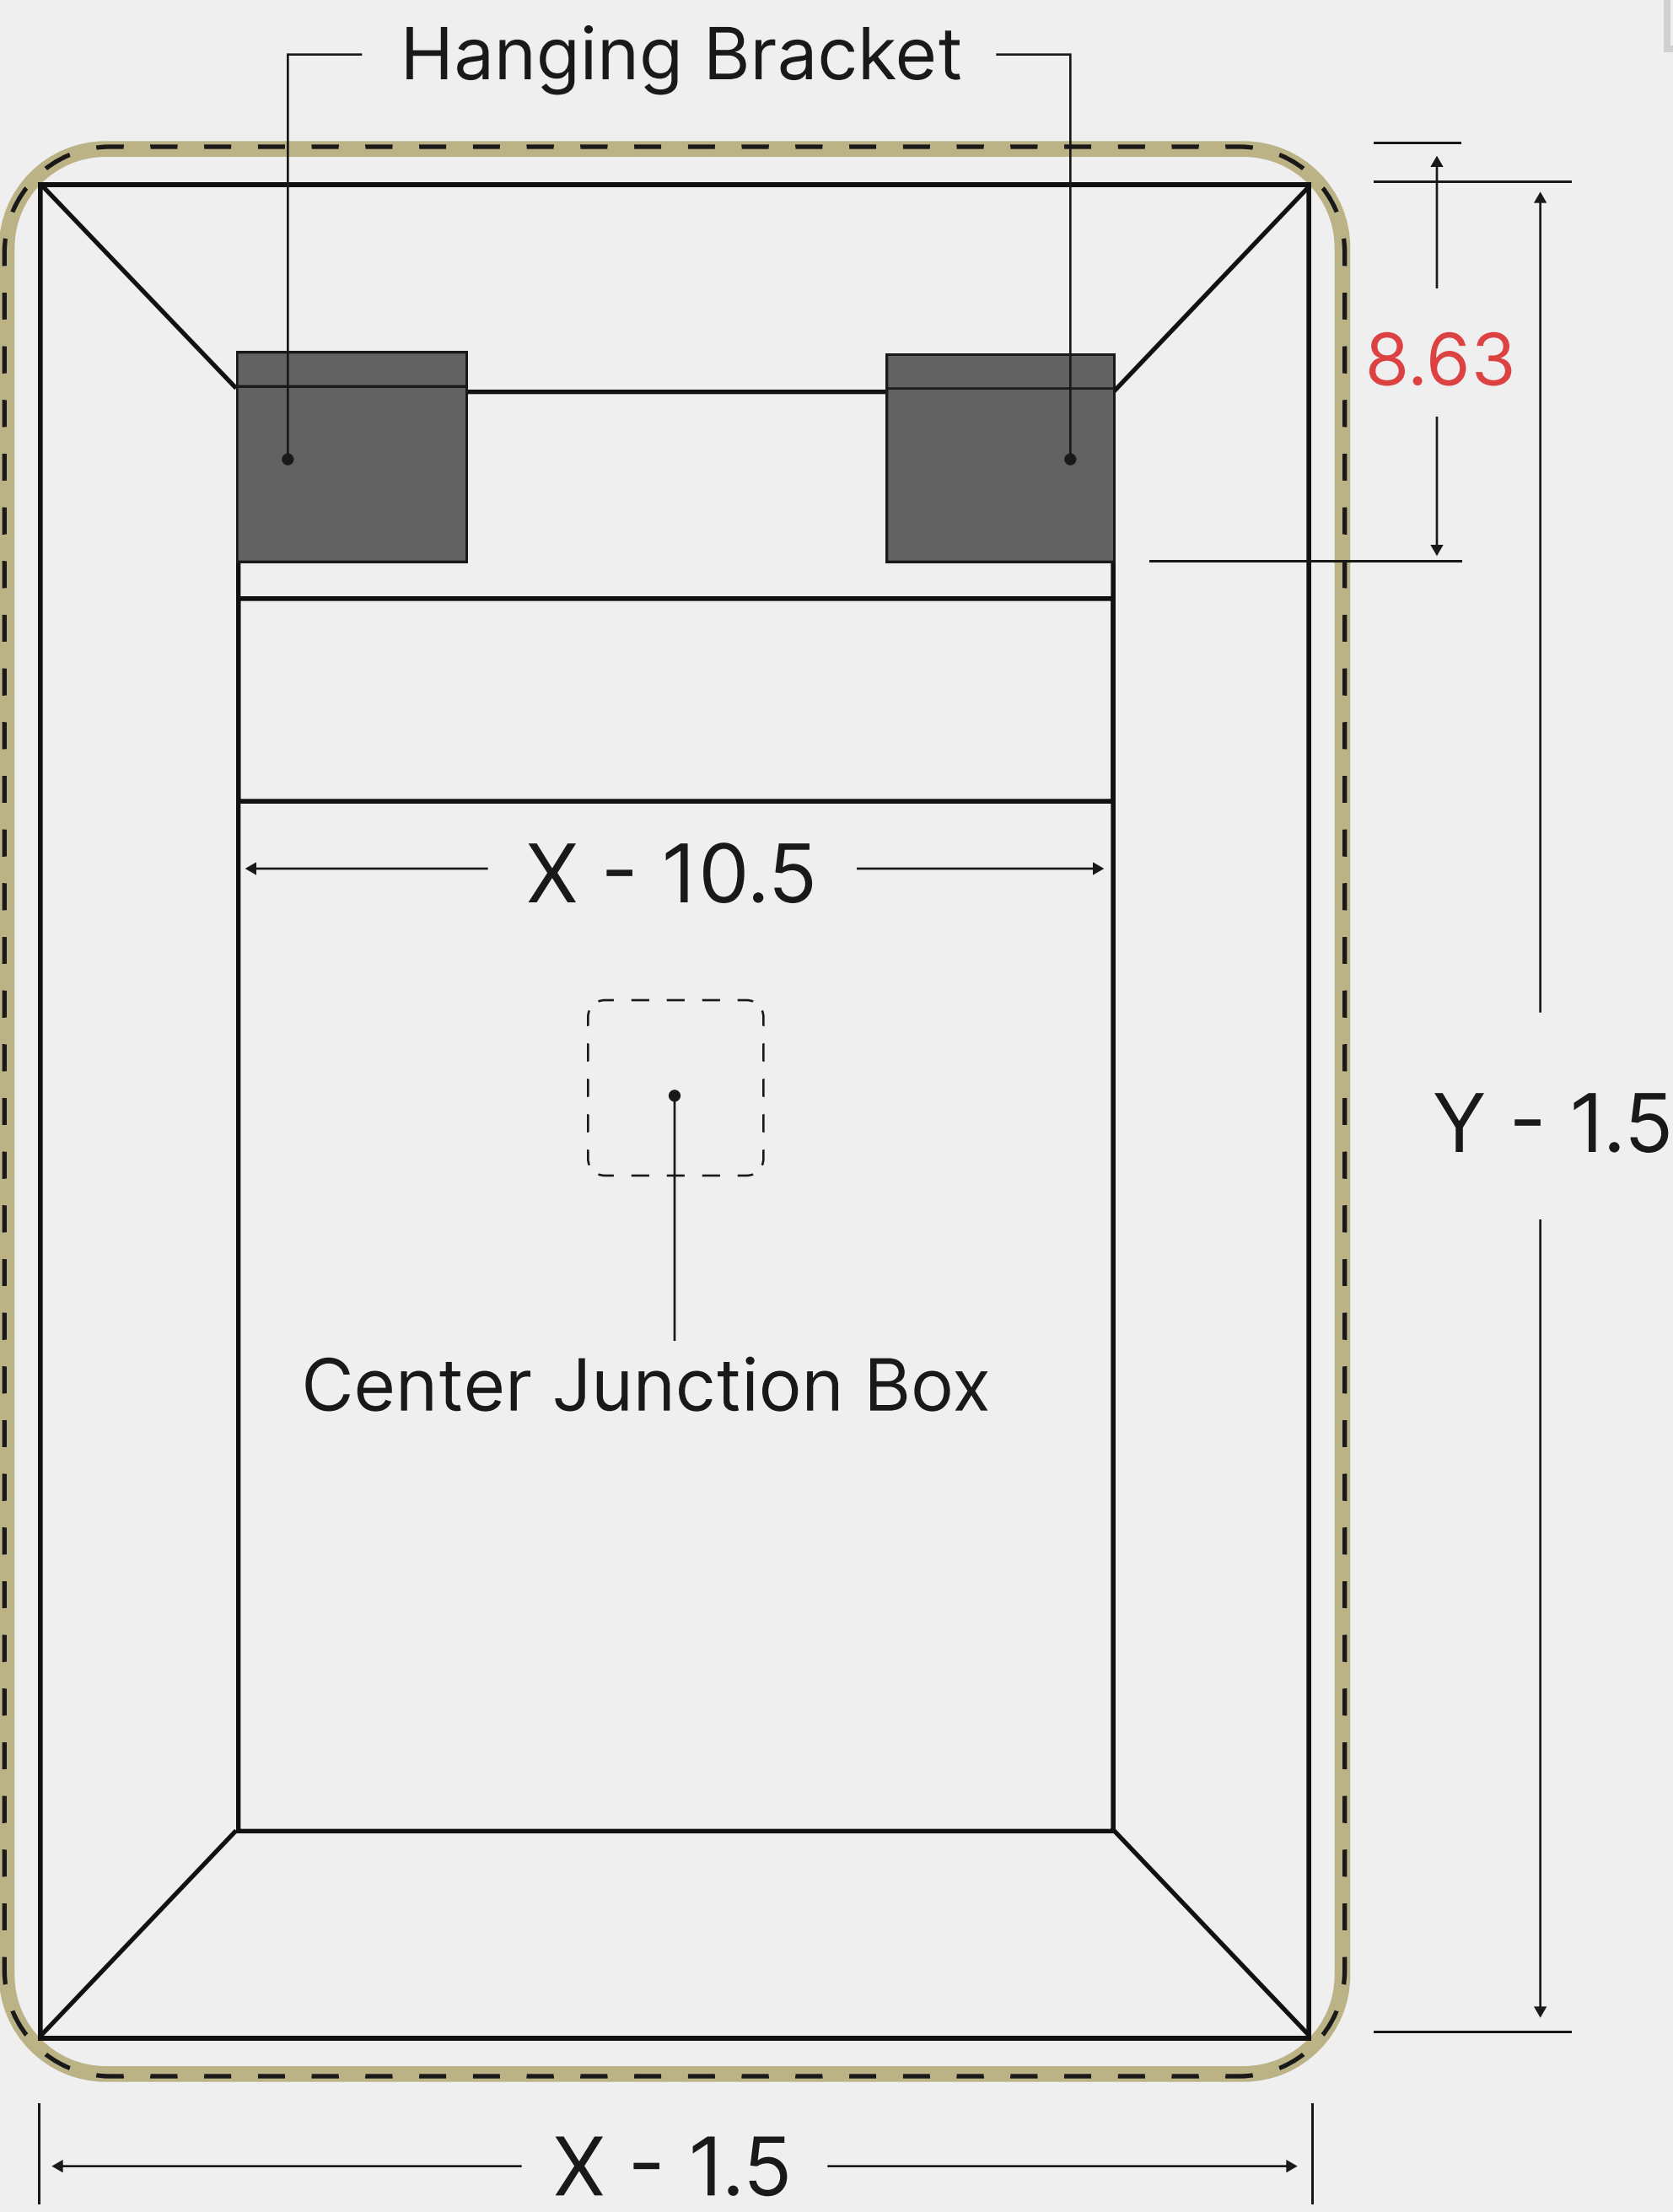

BACK

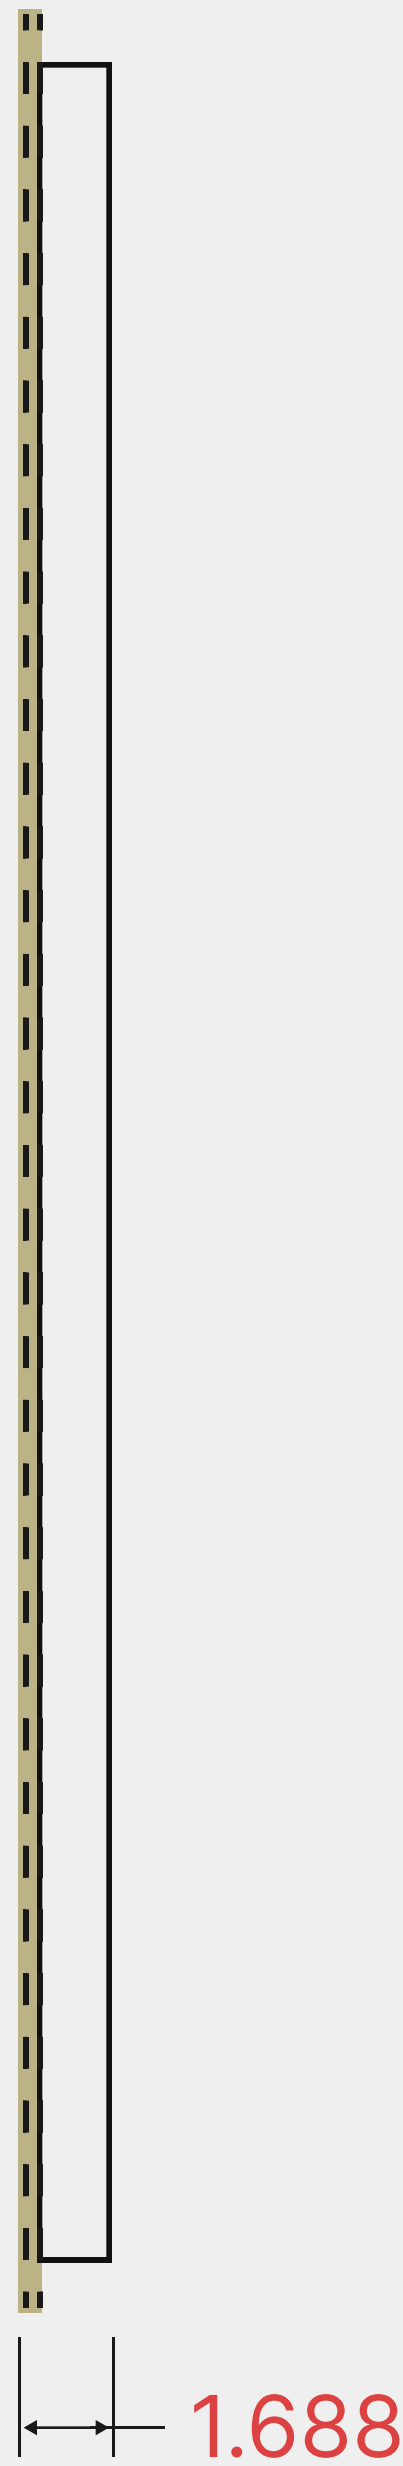

SIDE

Please punch holes after the dashed line

Please punch holes before the dashed line