

Future Deco Line R02i_{indirect}

MATRIX
MIRRORS

 Made in the USA



ITEM CODE

R 0 2 i

1

2

3

4

5

6

7

8

9

10



Additional Custom Specification Notes 11

(specify the accurate size in additional custom specification notes)

1 Types

- R - Future Deco Line

2 Styles

- 02 - Full Frame Edge Frost

3 Lighting Styles

- i - Indirect Light

4 Glass Sizes

- | | | |
|--------------------|--------------------|--|
| • 2436 - 24" x 36" | • 3060 - 30" x 60" | • 4254 - 42" x 54" |
| • 2448 - 24" x 48" | • 3648 - 36" x 48" | • 4284 - 42" x 84" |
| • 3042 - 30" x 42" | • 3660 - 36" x 60" | • Custom (Ex: 3173 - 31.4" x 72.5") |
| • 3048 - 30" x 48" | • 3672 - 36" x 72" | (specify the accurate size in additional custom specification notes) |

5 Outputs

- S - Standard Output
(550 lumens/ft; 4.5 watts/ft)
- H - High Output
(750 lumens/ft; 6 watts/ft)

Account for approximately 50% -60% light loss factor

- 60% for direct lighting
- 50% for indirect lighting

Use frost size on page 2 to calculate linear footage

6 Color Temperatures

- 00 - Color Switchable 2700k-6500k (90+ CRI)
(Only available with high output with **Touch Sensor** accessory)
- 00 - Color Switchable 1800k-6500k (90+ CRI)
(Only available with high output with **CCT Sync** accessory)
- 27 - 2700k (90+ CRI)
- 30 - 3000k (90+ CRI)
- 35 - 3500k (90+ CRI)
- 40 - 4000k (90+ CRI)
- 50 - 5000k (90+ CRI)

7 Drivers

- V - 100-277VAC 0-10 Dimmable
- E - 100-277VAC ELV Dimmable
- N - 100-277VAC Non-Dimming
(Mirrors with touch sensor have to use a non-dimming driver)

8 Mounting

- 1 - Vertical
- 2 - Horizontal

9 Frame Colors

- BF - Black Frame
- GF - Gold Frame
- SF - Silver Frame
- WF - White Frame
- BR - Bronze Frame
- CF - Custom Frame
(specify color on website)

9 Accessories

- | | |
|--------------------------|---|
| • NA - None | • AT - Anti-Fog & Touch Sensor |
| • TS - Touch Sensor | • NT - Night Light & Touch Sensor |
| • AF - Anti-Fog Demister | • AN - Anti Fog & Night Light |
| • NL - Night Light | • AL - Anti-Fog, Night Light & Touch Sensor |

- CT - CCT Sync Switch
- CF - CCT Sync & Anti-Fog
- CN - CCT Sync & Night Light
- CL - CCT Sync, Anti-Fog & Night Light

10 Additional Custom Specification Notes

- | | | | |
|------------------|-------------------------|-----------------------------|---|
| • Low-Iron Glass | • Powder Coated Chassis | • Antimicrobial Powder Coat | • Custom Inset & Frost Sizes (Up to 2 inches) |
|------------------|-------------------------|-----------------------------|---|

Future Deco Line R02i_{indirect}



Made in the USA

ACCESSORY DESCRIPTIONS

Anti-Fog Demister (120v power supply)

Available Sizes

- 8" x 30"
- 12" x 18"
- 11" x 14"
- 18" x 22"
- 13" x 14"
- 18" x 34"

Controllers




Touch Sensors

- On/Off Dim
 - White when Lights ON
 - Orange when Lights OFF
 - Hold 2 seconds to turn Touch Sensor Light OFF
- Color Temperature Switchable between **2700k to 6500k**
- Custom Logo available

Direct/ Indirect Styles




Direct & Indirect Styles

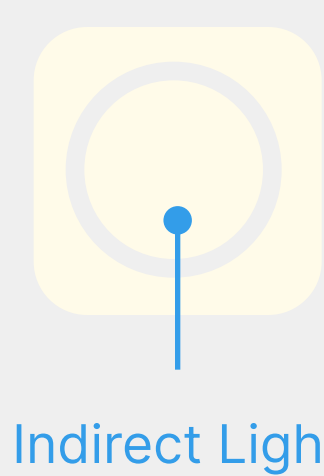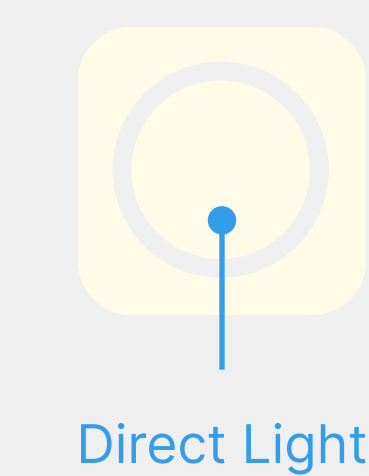

CCT Sync Switch


- Independent control of color temperature and light intensity
- Color Temperature Switchable between **1800k to 6500k**
- Dimensions: 1.7"W x 4.15"H x 0.2"D

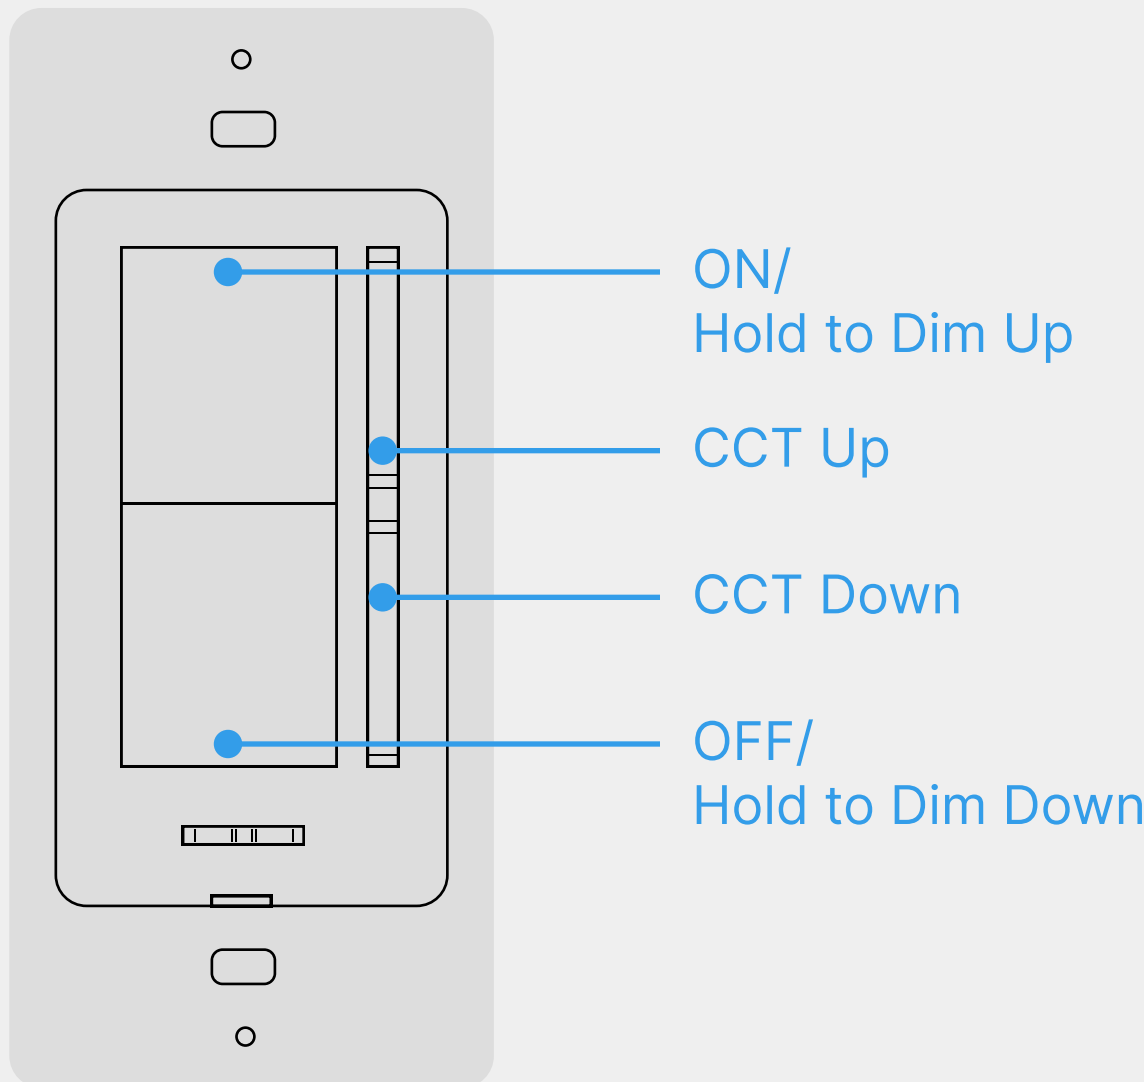


STANDARD SIZE (Dimensions in red are set)

UNIT: inch

Frost: 1.50	Depth: 1.688	Glass Width: X	Frame Width: X + 0.18
Inset: N/A	Radius: 2.00	Glass Height: Y	Frame Height: Y + 0.18

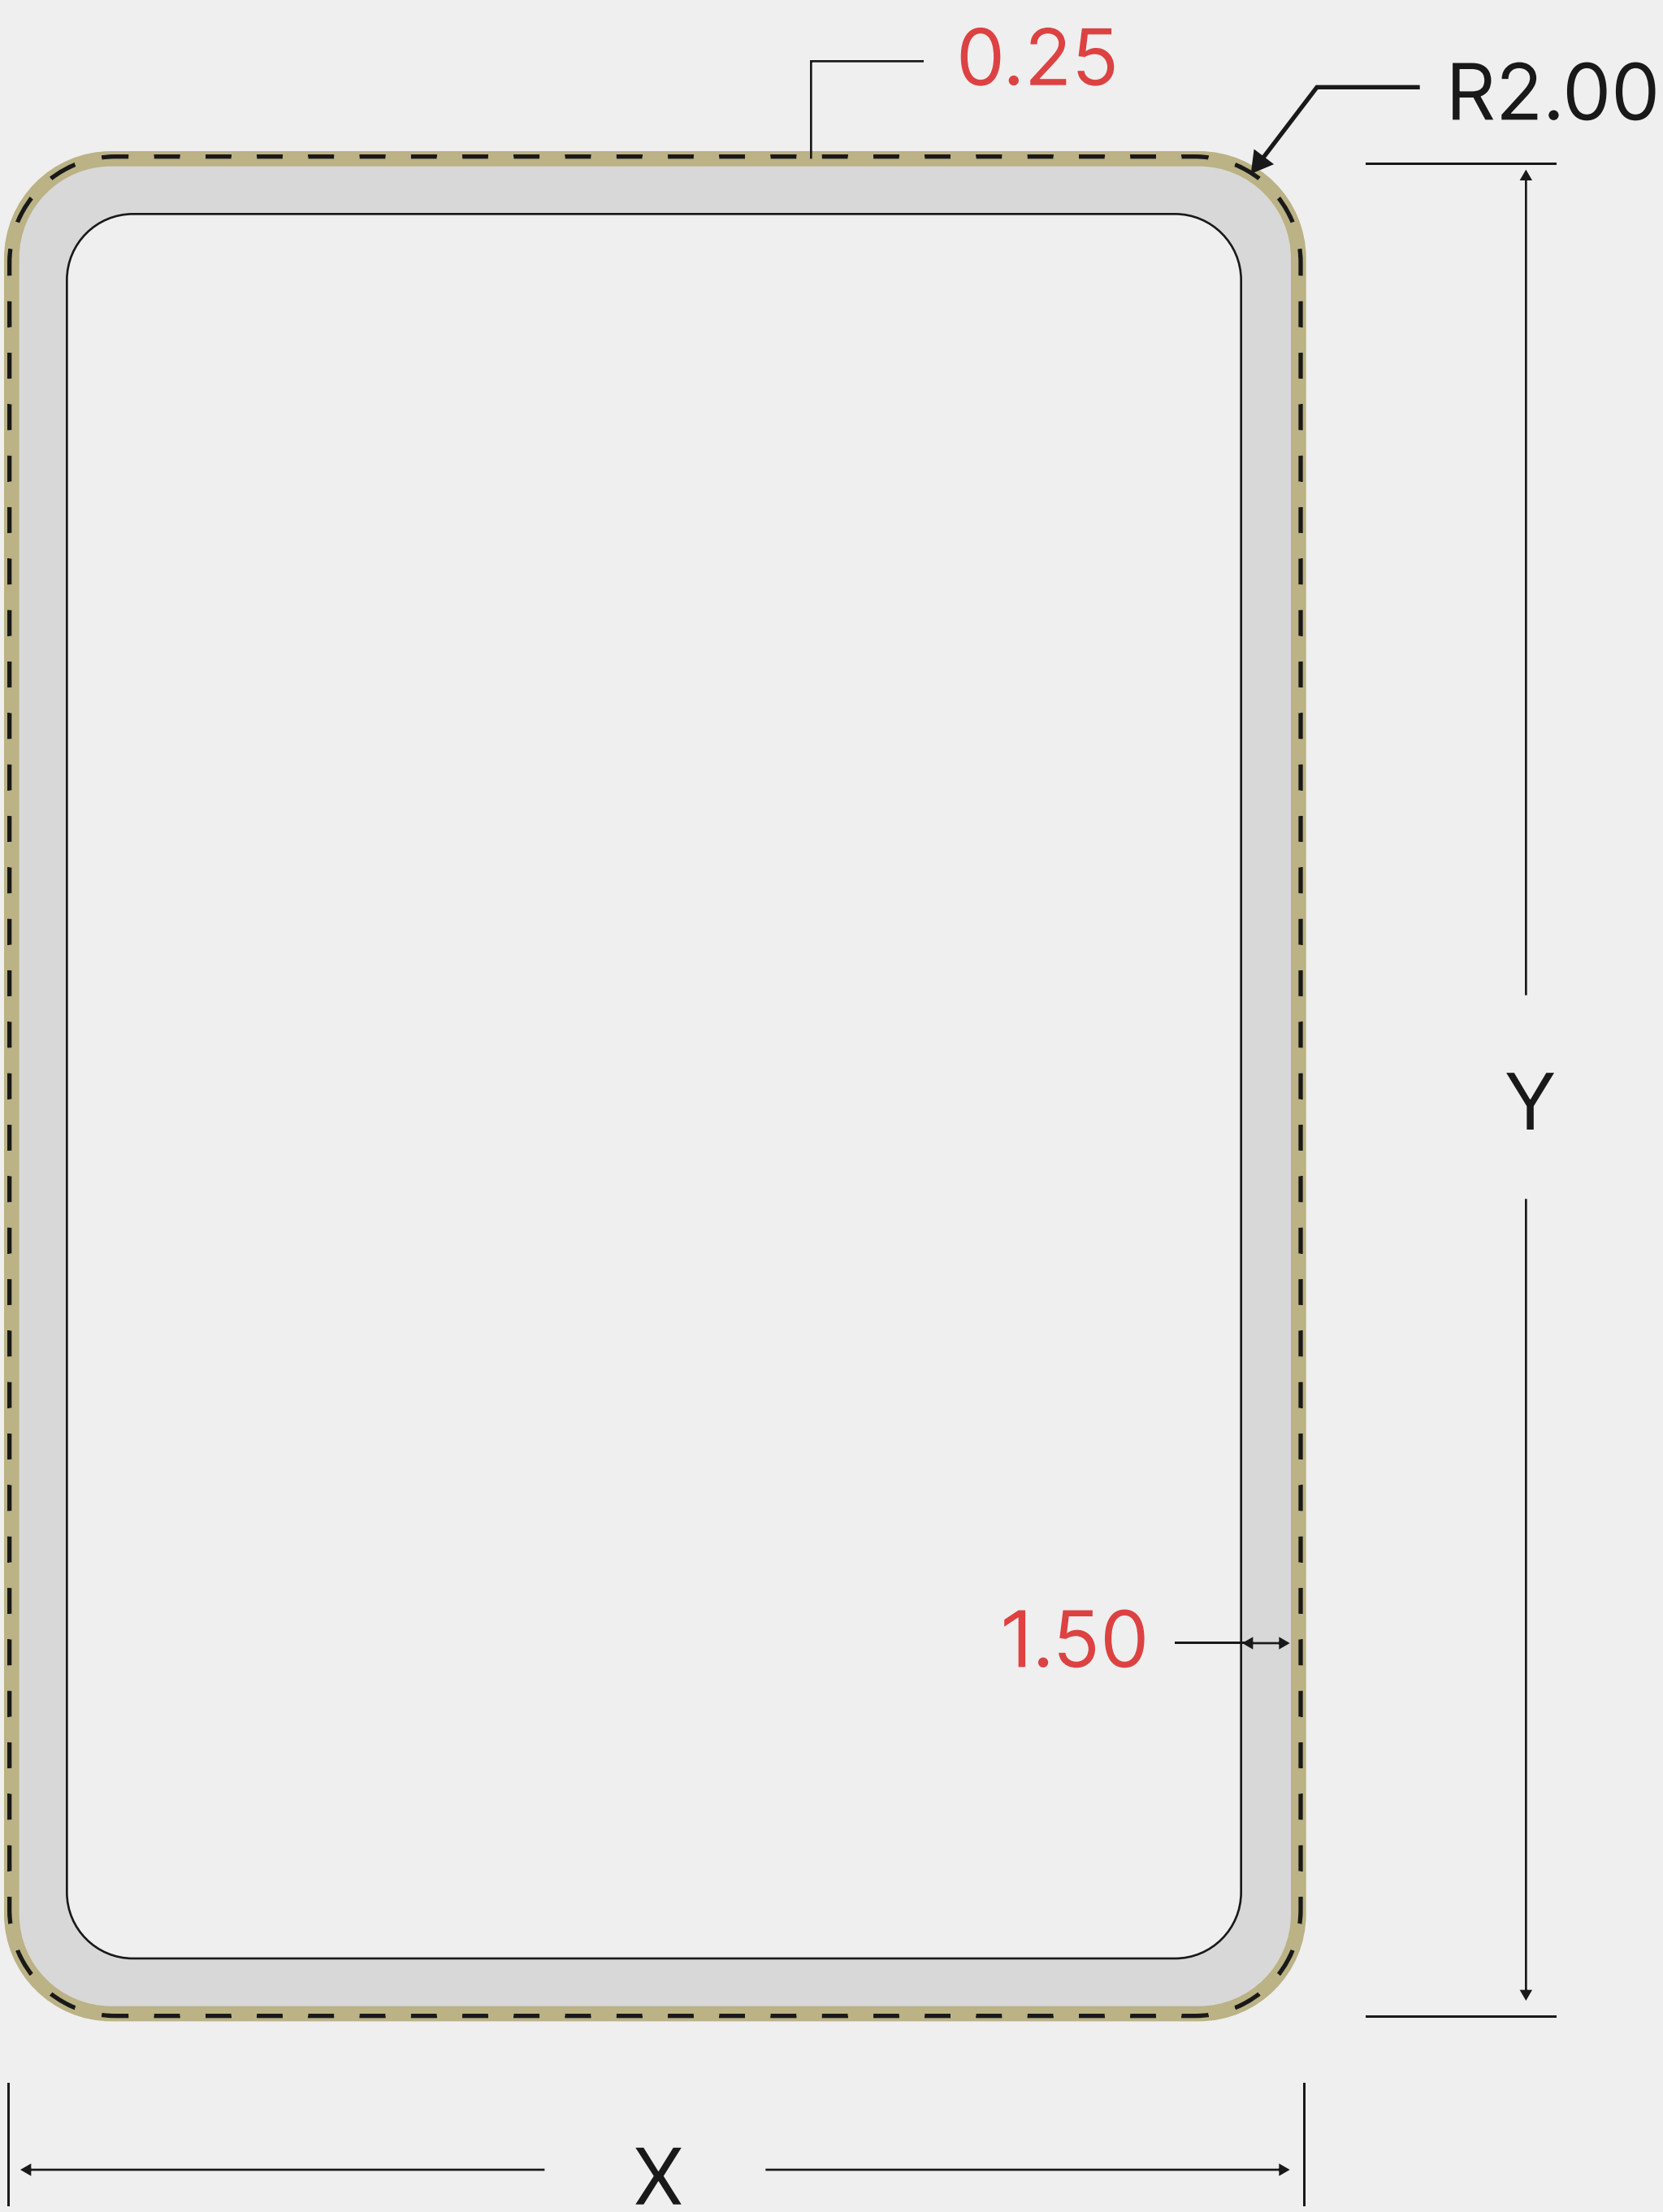


FRONT

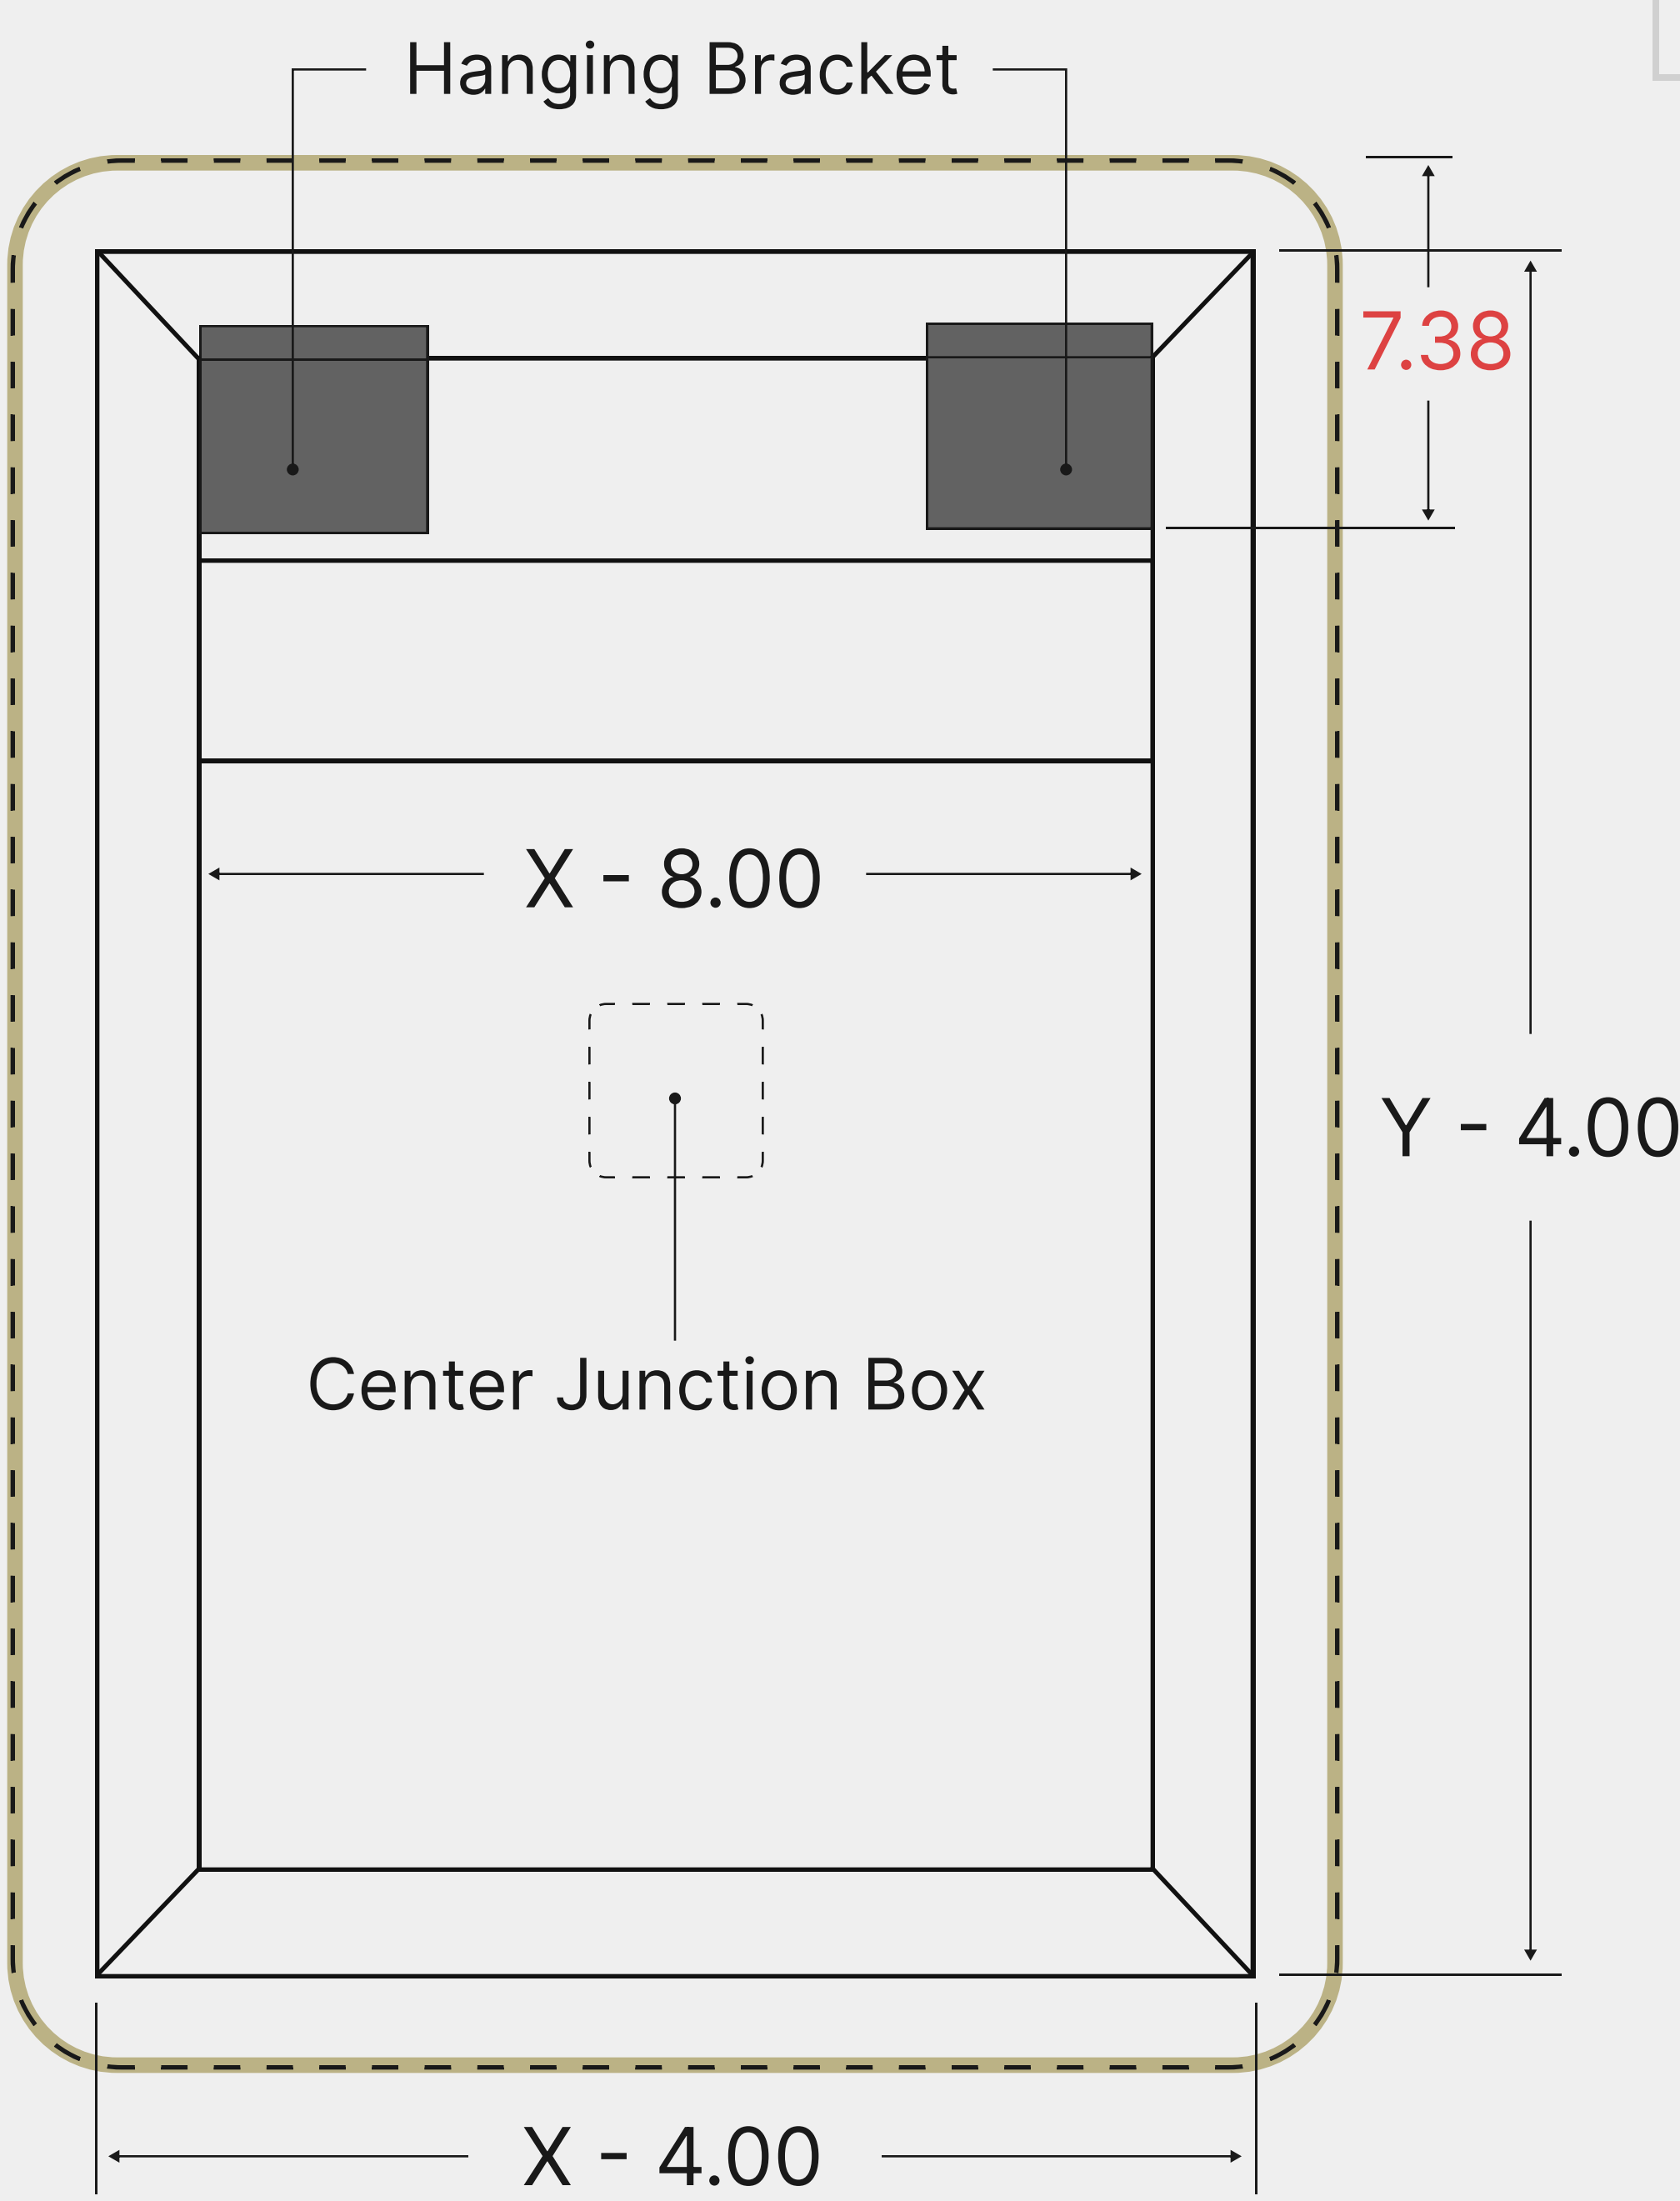

BACK

- Frame
- - - Glass
- Chassis

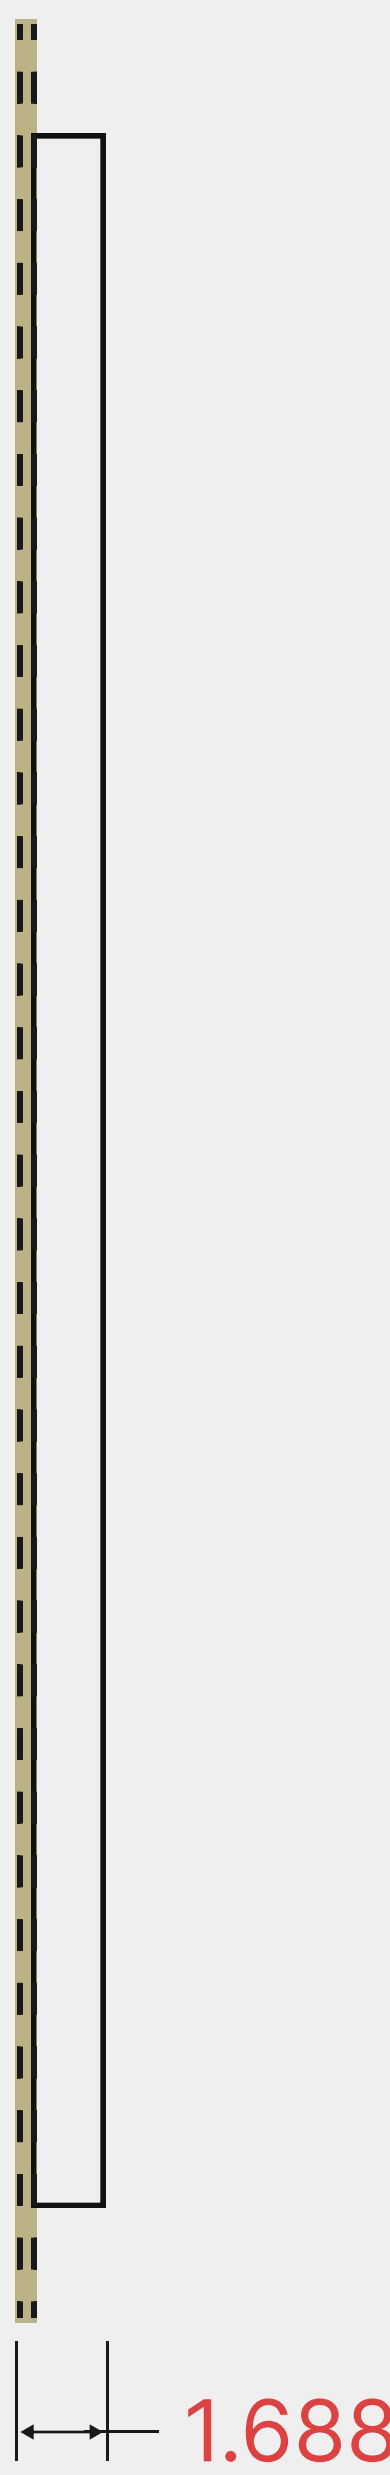

SIDE

Please punch holes after the dashed line

Please punch holes before the dashed line