

MODERN • LUXURIOUS • MADE IN THE USA

MATRIX[®]
MIRRORS

MATRIX MIRRORS

CATALOG

2025

6464 Warren Dr, Norcross, GA 30093

admin@matrixmirrors.com

www.matrixmirrors.com

(678) 580-5717



TABLE OF CONTENTS

001	Classic Line
027	Future Line
043	Future Deco Line
059	Deco Thin Line
085	Deco Wide Line
101	Bright Line
109	Anti-Ligature Line
111	Custom Mirrors
115	Accessories
121	Latest Innovations
123	Makeup Mirror
125	Mirror Cabinet
127	Suspended Mirror
131	Polished Mirror
133	Contact Us

CLASSIC LINE.

Straight Edge & Frost





ITEM CODE CONFIGURATION

Sample Item Code L 0 1 b 2 4 4 8 H 3 0 N 1 NA



- ① **Types**

 - L - Classic Line
- ② **Styles**

 - 01 - Full Frame Inset Frost
- ③ **Lighting Styles**

 - d - Direct Light
 - b - Direct & Indirect Light

- ④ **Standard Sizes**
- | | | | | |
|----------------|----------------|----------------|----------------|--|
| • 1836-18"x36" | • 3042-30"x42" | • 3232-32"x32" | • 3660-36"x60" | • 4260-42"x60" |
| • 2436-24"x36" | • 3048-30"x48" | • 3636-36"x36" | • 3672-36"x72" | • 4284-42"x84" |
| • 2448-24"x48" | • 3060-30"x60" | • 3642-36"x42" | • 4242-42"x42" | • Custom (Ex: 3173-31.4"x72.5") |
| • 2460-24"x60" | • 3072-30"x72" | • 3648-36"x48" | • 4254-42"x54" | (Specify the accurate size in additional custom specification notes) |

- ⑤ **Outputs**

 - S - Standard Output (550 lumens/ft; 4.5 watts/ft)
 - H - High Output (750 lumens/ft; 6 watts/ft)
- ⑥ **LED CCT** (All CRI 90+)

 - 27 - 2700k
 - 30 - 3000k
 - 35 - 3500k
 - 40 - 4000k
 - 50 - 5000k
 - 00 - Color Switchable (Only available with high output with touch sensor & CCT Sync accessory)
- ⑦ **Drivers**

 - V - 100-277VAC 0-10 Dimmable
 - E - 100-277VAC ELV Dimmable
 - N - 100-277VAC Non Dimming (Mirrors with touch sensors have to use a non-dimming driver)

- ⑧ **Mounting**

 - 1 - Vertical
 - 2 - Horizontal
- ⑨ **Accessories**

 - NA - None
 - TS - Touch Sensor
 - NL - Night Light
 - AF - Anti-Fog
 - AN - Anti-Fog & Night Light
 - AT - Anti-Fog & Touch Sensor
 - NT - Night Light & Touch Sensor
 - AL - Anti-Fog, Night Light, Touch Sensor
 - CT - CCT Sync
 - CN - CCT Sync & Night Light
 - CF - CCT Sync & Anti-Fog
 - CL - CCT Sync, Night Light, Anti-Fog

Additional Custom Specification

- Low-Iron Glasses
- Antimicrobial Powder Coat
- Powder Coated Chassis
- Custom Inset & Frosting Sizes (Up to 2")

ITEM CODE CONFIGURATION

Sample Item Code L 0 2 d 3 6 4 8 H 0 0 N 1 TS



- ① **Types**

 - L - Classic Line
- ② **Styles**

 - 02 - Full Frame Edge Frost
- ③ **Lighting Styles**

 - d - Direct Light
 - i - Indirect Light

- ④ **Standard Sizes**
- | | | | | |
|----------------|----------------|----------------|----------------|--|
| • 1836-18"x36" | • 3042-30"x42" | • 3232-32"x32" | • 3660-36"x60" | • 4260-42"x60" |
| • 2436-24"x36" | • 3048-30"x48" | • 3636-36"x36" | • 3672-36"x72" | • 4284-42"x84" |
| • 2448-24"x48" | • 3060-30"x60" | • 3642-36"x42" | • 4242-42"x42" | • Custom (Ex: 3173-31.4"x72.5") |
| • 2460-24"x60" | • 3072-30"x72" | • 3648-36"x48" | • 4254-42"x54" | (Specify the accurate size in additional custom specification notes) |

- ⑤ **Outputs**

 - S - Standard Output (550 lumens/ft; 4.5 watts/ft)
 - H - High Output (750 lumens/ft; 6 watts/ft)
- ⑥ **LED CCT** (All CRI 90+)

 - 27 - 2700k
 - 30 - 3000k
 - 35 - 3500k
 - 40 - 4000k
 - 50 - 5000k
 - 00 - Color Switchable (Only available with high output with touch sensor & CCT Sync accessory)
- ⑦ **Drivers**

 - V - 100-277VAC 0-10 Dimmable
 - E - 100-277VAC ELV Dimmable
 - N - 100-277VAC Non Dimming (Mirrors with touch sensors have to use a non-dimming driver)

- ⑧ **Mounting**

 - 1 - Vertical
 - 2 - Horizontal
- ⑨ **Accessories**

 - NA - None
 - TS - Touch Sensor
 - NL - Night Light
 - AF - Anti-Fog
 - AN - Anti-Fog & Night Light
 - AT - Anti-Fog & Touch Sensor
 - NT - Night Light & Touch Sensor
 - AL - Anti-Fog, Night Light, Touch Sensor
 - CT - CCT Sync
 - CN - CCT Sync & Night Light
 - CF - CCT Sync & Anti-Fog
 - CL - CCT Sync, Night Light, Anti-Fog

Additional Custom Specification

- Low-Iron Glasses
- Antimicrobial Powder Coat
- Powder Coated Chassis
- Custom Inset & Frosting Sizes (Up to 2")



L 0 3 b

L 0 3 d

L 0 4 i

L 0 4 d



ITEM CODE CONFIGURATION

Sample Item Code **L 0 3 d 3 6 4 8 H 4 0 N 1 NA**



- ① **Types**

 - L - Classic Line
- ② **Styles**

 - 03 - Double Long Side Inset Frost
- ③ **Lighting Styles**

 - d - Direct Light
 - b - Direct & Indirect Light
- ④ **Standard Sizes**

 - 1836-18"x36"
 - 2436-24"x36"
 - 2448-24"x48"
 - 2460-24"x60"
 - 3042-30"x42"
 - 3048-30"x48"
 - 3060-30"x60"
 - 3072-30"x72"
 - 3232-32"x32"
 - 3636-36"x36"
 - 3642-36"x42"
 - 3648-36"x48"
 - 3660-36"x60"
 - 3672-36"x72"
 - 4242-42"x42"
 - 4254-42"x54"
 - 4260-42"x60"
 - 4284-42"x84"
 - Custom (Ex: 3173-31.4"x72.5")
(Specify the accurate size in additional custom specification notes)
- ⑤ **Outputs**

 - S - Standard Output
(550 lumens/ft; 4.5 watts/ft)
 - H - High Output
(750 lumens/ft; 6 watts/ft)
- ⑥ **LED CCT (All CRI 90+)**

 - 27 - 2700k
 - 30 - 3000k
 - 35 - 3500k
 - 40 - 4000k
 - 50 - 5000k
 - 00 - Color Switchable
(Only available with high output with touch sensor & CCT Sync accessory)
- ⑦ **Drivers**

 - V - 100-277VAC 0-10 Dimmable
 - E - 100-277VAC ELV Dimmable
 - N - 100-277VAC Non Dimming
(Mirrors with touch sensors have to use a non-dimming driver)
- ⑧ **Mounting**

 - 1 - Vertical
 - 2 - Horizontal
- ⑨ **Accessories**

 - NA - None
 - TS - Touch Sensor
 - NL - Night Light
 - AF - Anti-Fog
 - AN - Anti-Fog & Night Light
 - AT - Anti-Fog & Touch Sensor
 - NT - Night Light & Touch Sensor
 - AL - Anti-Fog, Night Light, Touch Sensor
 - CT - CCT Sync
 - CN - CCT Sync & Night Light
 - CF - CCT Sync & Anti-Fog
 - CL - CCT Sync, Night Light, Anti-Fog

Additional Custom Specification

- Low-Iron Glasses
- Antimicrobial Powder Coat
- Powder Coated Chassis
- Custom Inset & Frosting Sizes (Up to 2")

ITEM CODE CONFIGURATION

Sample Item Code **L 0 4 i 4 0 9 8 H 3 0 E 2 NA**



- ① **Types**

 - L - Classic Line
- ② **Styles**

 - 04 - Double Long Side Edge Frost
- ③ **Lighting Styles**

 - d - Direct Light
 - i - Indirect Light
- ④ **Standard Sizes**

 - 1836-18"x36"
 - 2436-24"x36"
 - 2448-24"x48"
 - 2460-24"x60"
 - 3042-30"x42"
 - 3048-30"x48"
 - 3060-30"x60"
 - 3072-30"x72"
 - 3232-32"x32"
 - 3636-36"x36"
 - 3642-36"x42"
 - 3648-36"x48"
 - 3660-36"x60"
 - 3672-36"x72"
 - 4242-42"x42"
 - 4254-42"x54"
 - 4260-42"x60"
 - 4284-42"x84"
 - Custom (Ex: 3173-31.4"x72.5")
(Specify the accurate size in additional custom specification notes)
- ⑤ **Outputs**

 - S - Standard Output
(550 lumens/ft; 4.5 watts/ft)
 - H - High Output
(750 lumens/ft; 6 watts/ft)
- ⑥ **LED CCT (All CRI 90+)**

 - 27 - 2700k
 - 30 - 3000k
 - 35 - 3500k
 - 40 - 4000k
 - 50 - 5000k
 - 00 - Color Switchable
(Only available with high output with touch sensor & CCT Sync accessory)
- ⑦ **Drivers**

 - V - 100-277VAC 0-10 Dimmable
 - E - 100-277VAC ELV Dimmable
 - N - 100-277VAC Non Dimming
(Mirrors with touch sensors have to use a non-dimming driver)
- ⑧ **Mounting**

 - 1 - Vertical
 - 2 - Horizontal
- ⑨ **Accessories**

 - NA - None
 - TS - Touch Sensor
 - NL - Night Light
 - AF - Anti-Fog
 - AN - Anti-Fog & Night Light
 - AT - Anti-Fog & Touch Sensor
 - NT - Night Light & Touch Sensor
 - AL - Anti-Fog, Night Light, Touch Sensor
 - CT - CCT Sync
 - CN - CCT Sync & Night Light
 - CF - CCT Sync & Anti-Fog
 - CL - CCT Sync, Night Light, Anti-Fog

Additional Custom Specification

- Low-Iron Glasses
- Antimicrobial Powder Coat
- Powder Coated Chassis
- Custom Inset & Frosting Sizes (Up to 2")



L05i



L06i



L06d



2700K 3000K 3500K 4000K 5000K 6000K

2700K 3000K 3500K 4000K 5000K 6000K

ITEM CODE CONFIGURATION

Sample Item Code L 05 i 3042H 40 N 1 NA
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨



- ① **Types**
 - L - Classic Line
- ② **Styles**
 - 05 - No Frost, All Sides Illumination
- ③ **Lighting Styles**
 - i - Indirect Light

- ④ **Standard Sizes**
 - 1836-18"x36"
 - 2436-24"x36"
 - 2448-24"x48"
 - 2460-24"x60"
 - 3042-30"x42"
 - 3048-30"x48"
 - 3060-30"x60"
 - 3072-30"x72"
 - 3232-32"x32"
 - 3636-36"x36"
 - 3642-36"x42"
 - 3648-36"x48"
 - 3660-36"x60"
 - 3672-36"x72"
 - 4242-42"x42"
 - 4254-42"x54"
 - 4260-42"x60"
 - 4284-42"x84"
 - Custom (Ex: 3173-31.4"x72.5")
(Specify the accurate size in additional custom specification notes)

- ⑤ **Outputs**
 - S - Standard Output
(550 lumens/ft; 4.5 watts/ft)
 - H - High Output
(750 lumens/ft; 6 watts/ft)
- ⑥ **LED CCT** (All CRI 90+)
 - 27 - 2700k
 - 30 - 3000k
 - 35 - 3500k
 - 40 - 4000k
 - 50 - 5000k
 - 00 - Color Switchable
(Only available with high output with touch sensor & CCT Sync accessory)
- ⑦ **Drivers**
 - V - 100-277VAC 0-10 Dimmable
 - E - 100-277VAC ELV Dimmable
 - N - 100-277VAC Non Dimming
(Mirrors with touch sensors have to use a non-dimming driver)

- ⑧ **Mounting**
 - 1 - Vertical
 - 2 - Horizontal
- ⑨ **Accessories**
 - NA - None
 - TS - Touch Sensor
 - NL - Night Light
 - AF - Anti-Fog
 - AN - Anti-Fog & Night Light
 - AT - Anti-Fog & Touch Sensor
 - NT - Night Light & Touch Sensor
 - AL - Anti-Fog, Night Light, Touch Sensor

Additional Custom Specification

- Low-Iron Glasses
- Antimicrobial Powder Coat
- Powder Coated Chassis
- Custom Inset & Frosting Sizes (Up to 2")

ITEM CODE CONFIGURATION

Sample Item Code L 06 i 2460H 40 N 1 NA
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨



- ① **Types**
 - L - Classic Line
- ② **Styles**
 - 06 - Double Short Side Edge Frost
- ③ **Lighting Styles**
 - d - Direct Light
 - i - Indirect Light

- ④ **Standard Sizes**
 - 1836-18"x36"
 - 2436-24"x36"
 - 2448-24"x48"
 - 2460-24"x60"
 - 3042-30"x42"
 - 3048-30"x48"
 - 3060-30"x60"
 - 3072-30"x72"
 - 3232-32"x32"
 - 3636-36"x36"
 - 3642-36"x42"
 - 3648-36"x48"
 - 3660-36"x60"
 - 3672-36"x72"
 - 4242-42"x42"
 - 4254-42"x54"
 - 4260-42"x60"
 - 4284-42"x84"
 - Custom (Ex: 3173-31.4"x72.5")
(Specify the accurate size in additional custom specification notes)

- ⑤ **Outputs**
 - S - Standard Output
(550 lumens/ft; 4.5 watts/ft)
 - H - High Output
(750 lumens/ft; 6 watts/ft)
- ⑥ **LED CCT** (All CRI 90+)
 - 27 - 2700k
 - 30 - 3000k
 - 35 - 3500k
 - 40 - 4000k
 - 50 - 5000k
 - 00 - Color Switchable
(Only available with high output with touch sensor & CCT Sync accessory)
- ⑦ **Drivers**
 - V - 100-277VAC 0-10 Dimmable
 - E - 100-277VAC ELV Dimmable
 - N - 100-277VAC Non Dimming
(Mirrors with touch sensors have to use a non-dimming driver)

- ⑧ **Mounting**
 - 1 - Vertical
 - 2 - Horizontal
- ⑨ **Accessories**
 - NA - None
 - TS - Touch Sensor
 - NL - Night Light
 - AF - Anti-Fog
 - AN - Anti-Fog & Night Light
 - AT - Anti-Fog & Touch Sensor
 - NT - Night Light & Touch Sensor
 - AL - Anti-Fog, Night Light, Touch Sensor
 - CT - CCT Sync
 - CN - CCT Sync & Night Light
 - CF - CCT Sync & Anti-Fog
 - CL - CCT Sync, Night Light, Anti-Fog

Additional Custom Specification

- Low-Iron Glasses
- Antimicrobial Powder Coat
- Powder Coated Chassis
- Custom Inset & Frosting Sizes (Up to 2")



ITEM CODE CONFIGURATION

Sample Item Code **L 0 7 b 2 4 4 8 H 0 0 N 1 T S**
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨



- ① **Types**
 - L - Classic Line
- ② **Styles**
 - 07 - Double Short Side Inset Frost
- ③ **Lighting Styles**
 - d - Direct Light
 - b - Direct & Indirect Light

- ④ **Standard Sizes**
 - 1836-18"x36"
 - 2436-24"x36"
 - 2448-24"x48"
 - 2460-24"x60"
 - 3042-30"x42"
 - 3048-30"x48"
 - 3060-30"x60"
 - 3072-30"x72"
 - 3232-32"x32"
 - 3636-36"x36"
 - 3642-36"x42"
 - 3648-36"x48"
 - 3660-36"x60"
 - 3672-36"x72"
 - 4242-42"x42"
 - 4254-42"x54"
 - 4260-42"x60"
 - 4284-42"x84"
 - Custom (Ex: 3173-31.4"x72.5")
(Specify the accurate size in additional custom specification notes)

- ⑤ **Outputs**
 - S - Standard Output
(550 lumens/ft; 4.5 watts/ft)
 - H - High Output
(750 lumens/ft; 6 watts/ft)
- ⑥ **LED CCT** (All CRI 90+)
 - 27 - 2700k
 - 30 - 3000k
 - 35 - 3500k
 - 40 - 4000k
 - 50 - 5000k
 - 00 - Color Switchable
(Only available with high output with touch sensor & CCT Sync accessory)

- ⑦ **Drivers**
 - V - 100-277VAC 0-10 Dimmable
 - E - 100-277VAC ELV Dimmable
 - N - 100-277VAC Non Dimming
(Mirrors with touch sensors have to use a non-dimming driver)
- ⑧ **Mounting**
 - 1 - Vertical
 - 2 - Horizontal
- ⑨ **Accessories**
 - NA - None
 - TS - Touch Sensor
 - NL - Night Light
 - AF - Anti-Fog
 - AN - Anti-Fog & Night Light
 - AT - Anti-Fog & Touch Sensor
 - NT - Night Light & Touch Sensor
 - AL - Anti-Fog, Night Light, Touch Sensor
 - CT - CCT Sync
 - CN - CCT Sync & Night Light
 - CF - CCT Sync & Anti-Fog
 - CL - CCT Sync, Night Light, Anti-Fog

Additional Custom Specification

- Low-Iron Glasses
- Antimicrobial Powder Coat
- Powder Coated Chassis
- Custom Inset & Frosting Sizes (Up to 2")

ITEM CODE CONFIGURATION

Sample Item Code **L 0 8 i 4 2 6 0 H 3 0 N 1 N A**
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨



- ① **Types**
 - L - Classic Line
- ② **Styles**
 - 08 - Single Long Side Edge Frost
- ③ **Lighting Styles**
 - d - Direct Light
 - i - Indirect Light

- ④ **Standard Sizes**
 - 1836-18"x36"
 - 2436-24"x36"
 - 2448-24"x48"
 - 2460-24"x60"
 - 3042-30"x42"
 - 3048-30"x48"
 - 3060-30"x60"
 - 3072-30"x72"
 - 3232-32"x32"
 - 3636-36"x36"
 - 3642-36"x42"
 - 3648-36"x48"
 - 3660-36"x60"
 - 3672-36"x72"
 - 4242-42"x42"
 - 4254-42"x54"
 - 4260-42"x60"
 - 4284-42"x84"
 - Custom (Ex: 3173-31.4"x72.5")
(Specify the accurate size in additional custom specification notes)

- ⑤ **Outputs**
 - S - Standard Output
(550 lumens/ft; 4.5 watts/ft)
 - H - High Output
(750 lumens/ft; 6 watts/ft)
- ⑥ **LED CCT** (All CRI 90+)
 - 27 - 2700k
 - 30 - 3000k
 - 35 - 3500k
 - 40 - 4000k
 - 50 - 5000k
 - 00 - Color Switchable
(Only available with high output with touch sensor & CCT Sync accessory)

- ⑦ **Drivers**
 - V - 100-277VAC 0-10 Dimmable
 - E - 100-277VAC ELV Dimmable
 - N - 100-277VAC Non Dimming
(Mirrors with touch sensors have to use a non-dimming driver)
- ⑧ **Mounting**
 - 1 - Vertical
 - 2 - Horizontal
- ⑨ **Accessories**
 - NA - None
 - TS - Touch Sensor
 - NL - Night Light
 - AF - Anti-Fog
 - AN - Anti-Fog & Night Light
 - AT - Anti-Fog & Touch Sensor
 - NT - Night Light & Touch Sensor
 - AL - Anti-Fog, Night Light, Touch Sensor
 - CT - CCT Sync
 - CN - CCT Sync & Night Light
 - CF - CCT Sync & Anti-Fog
 - CL - CCT Sync, Night Light, Anti-Fog

Additional Custom Specification

- Low-Iron Glasses
- Antimicrobial Powder Coat
- Powder Coated Chassis
- Custom Inset & Frosting Sizes (Up to 2")



ITEM CODE CONFIGURATION

Sample Item Code L 0 9 b 4 0 8 8 S 5 0 N 2 NA
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨



- ① **Types**
 - L - Classic Line
- ② **Styles**
 - 09 - Single Long Side Inset Frost
- ③ **Lighting Styles**
 - d - Direct Light
 - b - Direct & Indirect Light

- ④ **Standard Sizes**
 - 1836-18"x36"
 - 2436-24"x36"
 - 2448-24"x48"
 - 2460-24"x60"
 - 3042-30"x42"
 - 3048-30"x48"
 - 3060-30"x60"
 - 3072-30"x72"
 - 3232-32"x32"
 - 3636-36"x36"
 - 3642-36"x42"
 - 3648-36"x48"
 - 3660-36"x60"
 - 3672-36"x72"
 - 4242-42"x42"
 - 4254-42"x54"
 - 4260-42"x60"
 - 4284-42"x84"
 - Custom (Ex: 3173-31.4"x72.5")
(Specify the accurate size in additional custom specification notes)

- ⑤ **Outputs**
 - S - Standard Output
(550 lumens/ft; 4.5 watts/ft)
 - H - High Output
(750 lumens/ft; 6 watts/ft)
- ⑥ **LED CCT (All CRI 90+)**
 - 27 - 2700k
 - 30 - 3000k
 - 35 - 3500k
 - 40 - 4000k
 - 50 - 5000k
 - 00 - Color Switchable
(Only available with high output with touch sensor & CCT Sync accessory)

- ⑦ **Drivers**
 - V - 100-277VAC 0-10 Dimmable
 - E - 100-277VAC ELV Dimmable
 - N - 100-277VAC Non Dimming
(Mirrors with touch sensors have to use a non-dimming driver)
- ⑧ **Mounting**
 - 1 - Vertical
 - 2 - Horizontal
- ⑨ **Accessories**
 - NA - None
 - TS - Touch Sensor
 - NL - Night Light
 - AF - Anti-Fog
 - AN - Anti-Fog & Night Light
 - AT - Anti-Fog & Touch Sensor
 - NT - Night Light & Touch Sensor
 - AL - Anti-Fog, Night Light, Touch Sensor
 - CT - CCT Sync
 - CN - CCT Sync & Night Light
 - CF - CCT Sync & Anti-Fog
 - CL - CCT Sync, Night Light, Anti-Fog

Additional Custom Specification

- Low-Iron Glasses
- Antimicrobial Powder Coat
- Powder Coated Chassis
- Custom Inset & Frosting Sizes (Up to 2")

ITEM CODE CONFIGURATION

Sample Item Code L 1 0 i 3 0 7 2 H 4 0 N 1 NA
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨



- ① **Types**
 - L - Classic Line
- ② **Styles**
 - 10 - Single Short Side Edge Frost
- ③ **Lighting Styles**
 - d - Direct Light
 - i - Indirect Light

- ④ **Standard Sizes**
 - 1836-18"x36"
 - 2436-24"x36"
 - 2448-24"x48"
 - 2460-24"x60"
 - 3042-30"x42"
 - 3048-30"x48"
 - 3060-30"x60"
 - 3072-30"x72"
 - 3232-32"x32"
 - 3636-36"x36"
 - 3642-36"x42"
 - 3648-36"x48"
 - 3660-36"x60"
 - 3672-36"x72"
 - 4242-42"x42"
 - 4254-42"x54"
 - 4260-42"x60"
 - 4284-42"x84"
 - Custom (Ex: 3173-31.4"x72.5")
(Specify the accurate size in additional custom specification notes)

- ⑤ **Outputs**
 - S - Standard Output
(550 lumens/ft; 4.5 watts/ft)
 - H - High Output
(750 lumens/ft; 6 watts/ft)
- ⑥ **LED CCT (All CRI 90+)**
 - 27 - 2700k
 - 30 - 3000k
 - 35 - 3500k
 - 40 - 4000k
 - 50 - 5000k
 - 00 - Color Switchable
(Only available with high output with touch sensor & CCT Sync accessory)

- ⑦ **Drivers**
 - V - 100-277VAC 0-10 Dimmable
 - E - 100-277VAC ELV Dimmable
 - N - 100-277VAC Non Dimming
(Mirrors with touch sensors have to use a non-dimming driver)
- ⑧ **Mounting**
 - 1 - Vertical
 - 2 - Horizontal
- ⑨ **Accessories**
 - NA - None
 - TS - Touch Sensor
 - NL - Night Light
 - AF - Anti-Fog
 - AN - Anti-Fog & Night Light
 - AT - Anti-Fog & Touch Sensor
 - NT - Night Light & Touch Sensor
 - AL - Anti-Fog, Night Light, Touch Sensor
 - CT - CCT Sync
 - CN - CCT Sync & Night Light
 - CF - CCT Sync & Anti-Fog
 - CL - CCT Sync, Night Light, Anti-Fog

Additional Custom Specification

- Low-Iron Glasses
- Antimicrobial Powder Coat
- Powder Coated Chassis
- Custom Inset & Frosting Sizes (Up to 2")



L11b



L11d



2700K 3000K 3500K 4000K 5000K 6000K

ITEM CODE CONFIGURATION

Sample Item Code L 1 1 b 3 0 4 8 S 3 0 N 1 NA
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨



- ① **Types**
 - L - Classic Line
- ② **Styles**
 - 11 - Single Short Side Inset Frost
- ③ **Lighting Styles**
 - d - Direct Light
 - b - Direct & Indirect Light

- ④ **Standard Sizes**
 - 1836-18"x36"
 - 2436-24"x36"
 - 2448-24"x48"
 - 2460-24"x60"
 - 3042-30"x42"
 - 3048-30"x48"
 - 3060-30"x60"
 - 3072-30"x72"
 - 3232-32"x32"
 - 3636-36"x36"
 - 3642-36"x42"
 - 3648-36"x48"
 - 3660-36"x60"
 - 3672-36"x72"
 - 4242-42"x42"
 - 4254-42"x54"
 - 4260-42"x60"
 - 4284-42"x84"
 - Custom (Ex: 3173-31.4"x72.5")
(Specify the accurate size in additional custom specification notes)

- ⑤ **Outputs**
 - S - Standard Output
(550 lumens/ft; 4.5 watts/ft)
 - H - High Output
(750 lumens/ft; 6 watts/ft)
- ⑥ **LED CCT (All CRI 90+)**
 - 27 - 2700k
 - 30 - 3000k
 - 35 - 3500k
 - 40 - 4000k
 - 50 - 5000k
 - 00 - Color Switchable
(Only available with high output with touch sensor & CCT Sync accessory)
- ⑦ **Drivers**
 - V - 100-277VAC 0-10 Dimmable
 - E - 100-277VAC ELV Dimmable
 - N - 100-277VAC Non Dimming
(Mirrors with touch sensors have to use a non-dimming driver)

- ⑧ **Mounting**
 - 1 - Vertical
 - 2 - Horizontal
- ⑨ **Accessories**
 - NA - None
 - TS - Touch Sensor
 - NL - Night Light
 - AF - Anti-Fog
 - AN - Anti-Fog & Night Light
 - AT - Anti-Fog & Touch Sensor
 - NT - Night Light & Touch Sensor
 - AL - Anti-Fog, Night Light, Touch Sensor

Additional Custom Specification

- Low-Iron Glasses
- Antimicrobial Powder Coat
- Powder Coated Chassis
- Custom Inset & Frosting Sizes (Up to 2")



L21i



2700K 3000K 3500K 4000K 5000K 6000K

ITEM CODE CONFIGURATION

Sample Item Code L 2 1 i 0 0 3 2 S 3 0 N 1 NA
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨



- ① **Types**
 - L - Classic Line
- ② **Styles**
 - 21 - Circle Full Frame Edge Frost
- ③ **Lighting Styles**
 - i - Indirect Light

- ④ **Standard Sizes**
 - 0032-32"
 - 0036-36"
 - Custom (Ex: 0038-38.1") (Specify the accurate size in additional custom specification notes)

- ⑤ **Outputs**
 - S - Standard Output
(550 lumens/ft; 4.5 watts/ft)
 - H - High Output
(750 lumens/ft; 6 watts/ft)
- ⑥ **LED CCT (All CRI 90+)**
 - 27 - 2700k
 - 30 - 3000k
 - 35 - 3500k
 - 40 - 4000k
 - 50 - 5000k
 - 00 - Color Switchable
(Only available with high output with touch sensor & CCT Sync accessory)
- ⑦ **Drivers**
 - V - 100-277VAC 0-10 Dimmable
 - E - 100-277VAC ELV Dimmable
 - N - 100-277VAC Non Dimming
(Mirrors with touch sensors have to use a non-dimming driver)


- ⑧ **Mounting**
 - 1 - Vertical
 - 2 - Horizontal
- ⑨ **Accessories**
 - NA - None
 - TS - Touch Sensor
 - NL - Night Light
 - AF - Anti-Fog
 - AN - Anti-Fog & Night Light
 - AT - Anti-Fog & Touch Sensor
 - NT - Night Light & Touch Sensor
 - AL - Anti-Fog, Night Light, Touch Sensor
 - CT - CCT Sync
 - CN - CCT Sync & Night Light
 - CF - CCT Sync & Anti-Fog
 - CL - CCT Sync, Night Light, Anti-Fog

Additional Custom Specification

- Low-Iron Glasses
- Antimicrobial Powder Coat
- Powder Coated Chassis
- Custom Inset & Frosting Sizes (Up to 2")



L 2 2 i

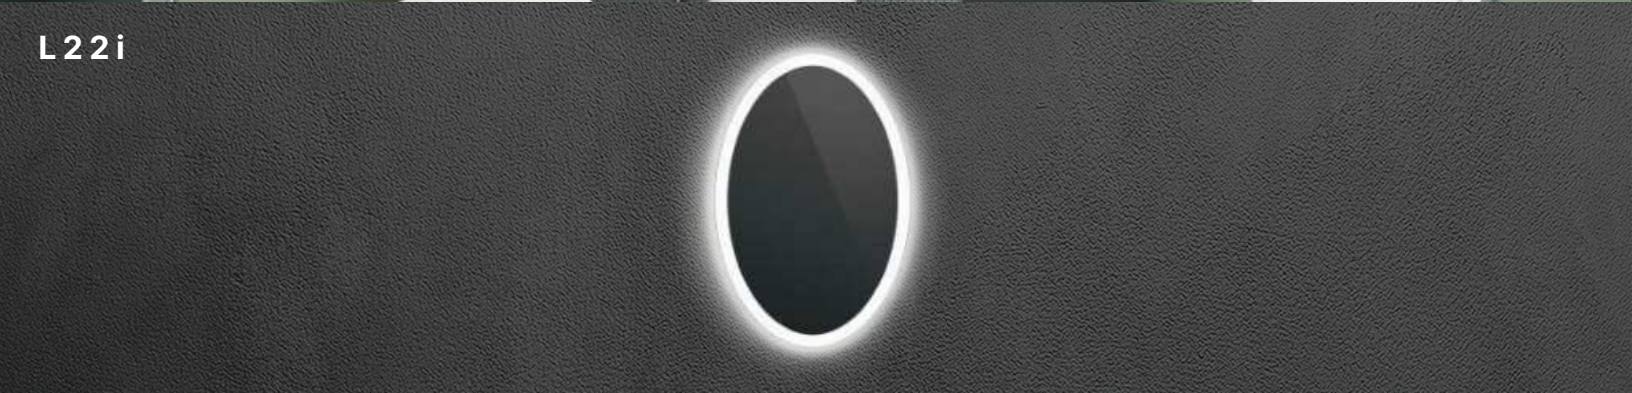

2700K	3000K	3500K	4000K	5000K	6000K
-------	-------	-------	-------	-------	-------

ITEM CODE CONFIGURATION

Sample Item Code L 2 2 i 2 4 3 6 S 30 N 1 NA
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨



- ① **Types**
 - L - Classic Line
- ② **Styles**
 - 22 - Oval Full Frame Edge Frost
- ③ **Lighting Styles**
 - i - Indirect Light

- ④ **Standard Sizes**
 - 2436-24"x36"
 - 2448-24"x48"
 - 3042-30"x42"
 - 3048-30"x48"
 - 3060-30"x60"
 - 3642-36"x42"
 - 3648-36"x48"
 - Custom (Ex: 3173-31.4"x72.5")
(Specify the accurate size in additional custom specification notes)

- ⑤ **Outputs**
 - S - Standard Output
(550 lumens/ft; 4.5 watts/ft)
 - H - High Output
(750 lumens/ft; 6 watts/ft)
- ⑥ **LED CCT** (All CRI 90+)
 - 27 - 2700k
 - 30 - 3000k
 - 35 - 3500k
 - 40 - 4000k
 - 50 - 5000k
 - 00 - Color Switchable
(Only available with high output with touch sensor & CCT Sync accessory)

- ⑦ **Drivers**
 - V - 100-277VAC 0-10 Dimmable
 - E - 100-277VAC ELV Dimmable
 - N - 100-277VAC Non Dimming
(Mirrors with touch sensors have to use a non-dimming driver)
- ⑧ **Mounting**
 - 1 - Vertical
 - 2 - Horizontal
- ⑨ **Accessories**
 - NA - None
 - TS - Touch Sensor
 - NL - Night Light
 - AF - Anti-Fog
 - AN - Anti-Fog & Night Light
 - AT - Anti-Fog & Touch Sensor
 - NT - Night Light & Touch Sensor
 - AL - Anti-Fog, Night Light, Touch Sensor

Additional Custom Specification

- Low-Iron Glasses
- Antimicrobial Powder Coat
- Powder Coated Chassis
- Custom Inset & Frosting Sizes (Up to 2")



L 2 3 i



2700K	3000K	3500K	4000K	5000K	6000K
-------	-------	-------	-------	-------	-------

ITEM CODE CONFIGURATION

Sample Item Code L 2 3 i 2 4 3 6 S 30 N 1 NA
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨



- ① **Types**
 - L - Classic Line
- ② **Styles**
 - 23 - Stadium Full Frame Inset Frost
- ③ **Lighting Styles**
 - i - Indirect Light

- ④ **Standard Sizes**
 - 2436-24"x36"
 - 2448-24"x48"
 - 3042-30"x42"
 - 3048-30"x48"
 - 3060-30"x60"
 - 3642-36"x42"
 - 3648-36"x48"
 - Custom (Ex: 3173-31.4"x72.5")
(Specify the accurate size in additional custom specification notes)

- ⑤ **Outputs**
 - S - Standard Output
(550 lumens/ft; 4.5 watts/ft)
 - H - High Output
(750 lumens/ft; 6 watts/ft)
- ⑥ **LED CCT** (All CRI 90+)
 - 27 - 2700k
 - 30 - 3000k
 - 35 - 3500k
 - 40 - 4000k
 - 50 - 5000k
 - 00 - Color Switchable
(Only available with high output with touch sensor & CCT Sync accessory)

- ⑦ **Drivers**
 - V - 100-277VAC 0-10 Dimmable
 - E - 100-277VAC ELV Dimmable
 - N - 100-277VAC Non Dimming
(Mirrors with touch sensors have to use a non-dimming driver)
- ⑧ **Mounting**
 - 1 - Vertical
 - 2 - Horizontal
- ⑨ **Accessories**
 - NA - None
 - TS - Touch Sensor
 - NL - Night Light
 - AF - Anti-Fog
 - AN - Anti-Fog & Night Light
 - AT - Anti-Fog & Touch Sensor
 - NT - Night Light & Touch Sensor
 - AL - Anti-Fog, Night Light, Touch Sensor
 - CT - CCT Sync
 - CN - CCT Sync & Night Light
 - CF - CCT Sync & Anti-Fog
 - CL - CCT Sync, Night Light, Anti-Fog

Additional Custom Specification

- Low-Iron Glasses
- Antimicrobial Powder Coat
- Powder Coated Chassis
- Custom Inset & Frosting Sizes (Up to 2")



L 2 4 i



2700K	3000K	3500K	4000K	5000K	6000K
-------	-------	-------	-------	-------	-------

ITEM CODE CONFIGURATION

Sample Item Code L 2 4 i 2 4 3 6 S 3 0 N 1 NA
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨



- ① **Types**
 - L - Classic Line
- ② **Styles**
 - 24 - Stadium Full Frame Edge Frost
- ③ **Lighting Styles**
 - i - Indirect Light

- ④ **Standard Sizes**
 - 2436-24"x36"
 - 2448-24"x48"
 - 3042-30"x42"
 - 3048-30"x48"
 - 3060-30"x60"
 - 3642-36"x42"
 - 3648-36"x48"
 - Custom (Ex: 3173-31.4"x72.5")
(Specify the accurate size in additional custom specification notes)

- ⑤ **Outputs**
 - S - Standard Output
(550 lumens/ft; 4.5 watts/ft)
 - H - High Output
(750 lumens/ft; 6 watts/ft)
- ⑥ **LED CCT** (All CRI 90+)
 - 27 - 2700k
 - 30 - 3000k
 - 35 - 3500k
 - 40 - 4000k
 - 50 - 5000k
 - 00 - Color Switchable
(Only available with high output with touch sensor & CCT Sync accessory)

- ⑦ **Drivers**
 - V - 100-277VAC 0-10 Dimmable
 - E - 100-277VAC ELV Dimmable
 - N - 100-277VAC Non Dimming
(Mirrors with touch sensors have to use a non-dimming driver)
- ⑧ **Mounting**
 - 1 - Vertical
 - 2 - Horizontal
- ⑨ **Accessories**
 - NA - None
 - TS - Touch Sensor
 - NL - Night Light
 - AF - Anti-Fog
 - AN - Anti-Fog & Night Light
 - AT - Anti-Fog & Touch Sensor
 - NT - Night Light & Touch Sensor
 - AL - Anti-Fog, Night Light, Touch Sensor

Additional Custom Specification

- Low-Iron Glasses
- Antimicrobial Powder Coat
- Powder Coated Chassis
- Custom Inset & Frosting Sizes (Up to 2")



L 2 5 i



2700K	3000K	3500K	4000K	5000K	6000K
-------	-------	-------	-------	-------	-------

ITEM CODE CONFIGURATION

Sample Item Code L 2 5 i 2 4 3 6 S 3 0 N 1 NA
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨



- ① **Types**
 - L - Classic Line
- ② **Styles**
 - 23 - Arch Full Frame Inset Frost
- ③ **Lighting Styles**
 - i - Indirect Light

- ④ **Standard Sizes**
 - 2436-24"x36"
 - 2448-24"x48"
 - 3042-30"x42"
 - 3048-30"x48"
 - 3060-30"x60"
 - 3642-36"x42"
 - 3648-36"x48"
 - Custom (Ex: 3173-31.4"x72.5")
(Specify the accurate size in additional custom specification notes)

- ⑤ **Outputs**
 - S - Standard Output
(550 lumens/ft; 4.5 watts/ft)
 - H - High Output
(750 lumens/ft; 6 watts/ft)
- ⑥ **LED CCT** (All CRI 90+)
 - 27 - 2700k
 - 30 - 3000k
 - 35 - 3500k
 - 40 - 4000k
 - 50 - 5000k
 - 00 - Color Switchable
(Only available with high output with touch sensor & CCT Sync accessory)


- ⑦ **Drivers**
 - V - 100-277VAC 0-10 Dimmable
 - E - 100-277VAC ELV Dimmable
 - N - 100-277VAC Non Dimming
(Mirrors with touch sensors have to use a non-dimming driver)
- ⑧ **Mounting**
 - 1 - Vertical
 - 2 - Horizontal
- ⑨ **Accessories**
 - NA - None
 - TS - Touch Sensor
 - NL - Night Light
 - AF - Anti-Fog
 - AN - Anti-Fog & Night Light
 - AT - Anti-Fog & Touch Sensor
 - NT - Night Light & Touch Sensor
 - AL - Anti-Fog, Night Light, Touch Sensor

Additional Custom Specification

- Low-Iron Glasses
- Antimicrobial Powder Coat
- Powder Coated Chassis
- Custom Inset & Frosting Sizes (Up to 2")



L 26 i



ITEM CODE CONFIGURATION

Sample Item Code L 26 i 2 4 3 6 S 30 N 1 NA



- ① Types

 - L - Classic Line
- ② Styles

 - 26 - Arch Full Frame Edge Frost
- ③ Lighting Styles

 - i - Indirect Light

- ④ Standard Sizes
- 2436-24"x36"
 - 2448-24"x48"
 - 3042-30"x42"
 - 3048-30"x48"
 - 3060-30"x60"
 - 3642-36"x42"
 - 3648-36"x48"
 - Custom (Ex: 3173-31.4"x72.5")
(Specify the accurate size in additional custom specification notes)

- ⑤ Outputs

 - S - Standard Output
(550 lumens/ft; 4.5 watts/ft)
 - H - High Output
(750 lumens/ft; 6 watts/ft)
- ⑥ LED CCT (All CRI 90+)

 - 27 - 2700k
 - 30 - 3000k
 - 35 - 3500k
 - 40 - 4000k
 - 50 - 5000k
 - 00 - Color Switchable
(Only available with high output with touch sensor & CCT Sync accessory)

- ⑦ Drivers

 - V - 100-277VAC 0-10 Dimmable
 - E - 100-277VAC ELV Dimmable
 - N - 100-277VAC Non Dimming
(Mirrors with touch sensors have to use a non-dimming driver)
- ⑧ Mounting

 - 1 - Vertical
 - 2 - Horizontal
- ⑨ Accessories


 - NA - None
 - TS - Touch Sensor
 - NL - Night Light
 - AF - Anti-Fog
 - AN - Anti-Fog & Night Light
 - AT - Anti-Fog & Touch Sensor
 - NT - Night Light & Touch Sensor
 - AL - Anti-Fog, Night Light, Touch Sensor
 - CT - CCT Sync
 - CN - CCT Sync & Night Light
 - CF - CCT Sync & Anti-Fog
 - CL - CCT Sync, Night Light, Anti-Fog

Additional Custom Specification

- Low-Iron Glasses
- Antimicrobial Powder Coat
- Powder Coated Chassis
- Custom Inset & Frosting Sizes (Up to 2")



L 51 i



ITEM CODE CONFIGURATION

Sample Item Code L 51 i 00 32 S 30 N 1 NA



- ① Types

 - L - Classic Line
- ② Styles

 - 51 - Circle No Frost
- ③ Lighting Styles

 - i - Indirect Light

- ④ Standard Sizes
- 0032-32"
 - 0036-36"
 - Custom (Ex: 0038-38.1") (Specify the accurate size in additional custom specification notes)

- ⑤ Outputs

 - S - Standard Output
(550 lumens/ft; 4.5 watts/ft)
 - H - High Output
(750 lumens/ft; 6 watts/ft)
- ⑥ LED CCT (All CRI 90+)

 - 27 - 2700k
 - 30 - 3000k
 - 35 - 3500k
 - 40 - 4000k
 - 50 - 5000k
 - 00 - Color Switchable
(Only available with high output with touch sensor & CCT Sync accessory)

- ⑦ Drivers

 - V - 100-277VAC 0-10 Dimmable
 - E - 100-277VAC ELV Dimmable
 - N - 100-277VAC Non Dimming
(Mirrors with touch sensors have to use a non-dimming driver)
- ⑧ Mounting

 - 1 - Vertical
 - 2 - Horizontal
- ⑨ Accessories

 - NA - None
 - TS - Touch Sensor
 - NL - Night Light
 - AF - Anti-Fog
 - AN - Anti-Fog & Night Light
 - AT - Anti-Fog & Touch Sensor
 - NT - Night Light & Touch Sensor
 - AL - Anti-Fog, Night Light, Touch Sensor
 - CT - CCT Sync
 - CN - CCT Sync & Night Light
 - CF - CCT Sync & Anti-Fog
 - CL - CCT Sync, Night Light, Anti-Fog

Additional Custom Specification

- Low-Iron Glasses
- Antimicrobial Powder Coat
- Powder Coated Chassis
- Custom Inset & Frosting Sizes (Up to 2")



L52i

L53i



2700K 3000K 3500K 4000K 5000K 6000K 2700K 3000K 3500K 4000K 5000K 6000K

ITEM CODE CONFIGURATION

Sample Item Code L 5 2 i 2 4 3 6 S 3 0 N 1 NA
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨



- ① **Types**
 - L - Classic Line
- ② **Styles**
 - 52 - Oval No Frost
- ③ **Lighting Styles**
 - i - Indirect Light

- ④ **Standard Sizes**
 - 2436-24"x36"
 - 2448-24"x48"
 - 3042-30"x42"
 - 3048-30"x48"
 - 3060-30"x60"
 - 3642-36"x42"
 - 3648-36"x48"
 - Custom (Ex: 3173-31.4"x72.5")
(Specify the accurate size in additional custom specification notes)

- ⑤ **Outputs**
 - S - Standard Output
(550 lumens/ft; 4.5 watts/ft)
 - H - High Output
(750 lumens/ft; 6 watts/ft)
- ⑥ **LED CCT** (All CRI 90+)
 - 27 - 2700k
 - 30 - 3000k
 - 35 - 3500k
 - 40 - 4000k
 - 50 - 5000k
 - 00 - Color Switchable
(Only available with high output with touch sensor & CCT Sync accessory)

- ⑦ **Drivers**
 - V - 100-277VAC 0-10 Dimmable
 - E - 100-277VAC ELV Dimmable
 - N - 100-277VAC Non Dimming
(Mirrors with touch sensors have to use a non-dimming driver)
- ⑧ **Mounting**
 - 1 - Vertical
 - 2 - Horizontal
- ⑨ **Accessories**
 - NA - None
 - TS - Touch Sensor
 - NL - Night Light
 - AF - Anti-Fog
 - AN - Anti-Fog & Night Light
 - AT - Anti-Fog & Touch Sensor
 - NT - Night Light & Touch Sensor
 - AL - Anti-Fog, Night Light, Touch Sensor

Additional Custom Specification

- Low-Iron Glasses
- Antimicrobial Powder Coat
- Powder Coated Chassis
- Custom Inset & Frosting Sizes (Up to 2")

ITEM CODE CONFIGURATION

Sample Item Code L 5 3 i 2 4 3 6 S 3 0 N 1 NA
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨



- ① **Types**
 - L - Classic Line
- ② **Styles**
 - 53 - Stadium No Frost
- ③ **Lighting Styles**
 - i - Indirect Light

- ④ **Standard Sizes**
 - 2436-24"x36"
 - 2448-24"x48"
 - 3042-30"x42"
 - 3048-30"x48"
 - 3060-30"x60"
 - 3642-36"x42"
 - 3648-36"x48"
 - Custom (Ex: 3173-31.4"x72.5")
(Specify the accurate size in additional custom specification notes)

- ⑤ **Outputs**
 - S - Standard Output
(550 lumens/ft; 4.5 watts/ft)
 - H - High Output
(750 lumens/ft; 6 watts/ft)
- ⑥ **LED CCT** (All CRI 90+)
 - 27 - 2700k
 - 30 - 3000k
 - 35 - 3500k
 - 40 - 4000k
 - 50 - 5000k
 - 00 - Color Switchable
(Only available with high output with touch sensor & CCT Sync accessory)


- ⑦ **Drivers**
 - V - 100-277VAC 0-10 Dimmable
 - E - 100-277VAC ELV Dimmable
 - N - 100-277VAC Non Dimming
(Mirrors with touch sensors have to use a non-dimming driver)
- ⑧ **Mounting**
 - 1 - Vertical
 - 2 - Horizontal
- ⑨ **Accessories**
 - NA - None
 - TS - Touch Sensor
 - NL - Night Light
 - AF - Anti-Fog
 - AN - Anti-Fog & Night Light
 - AT - Anti-Fog & Touch Sensor
 - NT - Night Light & Touch Sensor
 - AL - Anti-Fog, Night Light, Touch Sensor
 - CT - CCT Sync
 - CN - CCT Sync & Night Light
 - CF - CCT Sync & Anti-Fog
 - CL - CCT Sync, Night Light, Anti-Fog

Additional Custom Specification

- Low-Iron Glasses
- Antimicrobial Powder Coat
- Powder Coated Chassis
- Custom Inset & Frosting Sizes (Up to 2")



L55i



ITEM CODE CONFIGURATION

Sample Item Code **L 55 i 2 4 3 6 S 30 N 1 NA**
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨



- ① **Types**

 - L - Classic Line
- ② **Styles**

 - 55 - Arch No Frost
- ③ **Lighting Styles**

 - i - Indirect Light
- ④ **Standard Sizes**

 - 2436-24"x36"
 - 2448-24"x48"
 - 3042-30"x42"
 - 3048-30"x48"
 - 3060-30"x60"
 - 3642-36"x42"
 - 3648-36"x48"
 - Custom (Ex: 3173-31.4"x72.5")
(Specify the accurate size in additional custom specification notes)
- ⑤ **Outputs**

 - S - Standard Output
(550 lumens/ft; 4.5 watts/ft)
 - H - High Output
(750 lumens/ft; 6 watts/ft)
- ⑥ **LED CCT (All CRI 90+)**

 - 27 - 2700k
 - 30 - 3000k
 - 35 - 3500k
 - 40 - 4000k
 - 50 - 5000k
 - 00 - Color Switchable
(Only available with high output with touch sensor & CCT Sync accessory)
- ⑦ **Drivers**

 - V - 100-277VAC 0-10 Dimmable
 - E - 100-277VAC ELV Dimmable
 - N - 100-277VAC Non Dimming
(Mirrors with touch sensors have to use a non-dimming driver)
- ⑧ **Mounting**

 - 1 - Vertical
 - 2 - Horizontal
- ⑨ **Accessories**

 - NA - None
 - TS - Touch Sensor
 - NL - Night Light
 - AF - Anti-Fog
 - AN - Anti-Fog & Night Light
 - AT - Anti-Fog & Touch Sensor
 - NT - Night Light & Touch Sensor
 - AL - Anti-Fog, Night Light, Touch Sensor
 - CT - CCT Sync
 - CN - CCT Sync & Night Light
 - CF - CCT Sync & Anti-Fog
 - CL - CCT Sync, Night Light, Anti-Fog

Additional Custom Specification

- Low-Iron Glasses
- Antimicrobial Powder Coat
- Powder Coated Chassis
- Custom Inset & Frosting Sizes (Up to 2")



L02d3080H40N1NA



FUTURE LINE.

Rounded Corners



F01b

F01d



2700K 3000K 3500K 4000K 5000K 6000K

ITEM CODE CONFIGURATION

Sample Item Code **F 0 1 d 6 0 8 0 H 3 0 N 1 NA**
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨



- ① **Types**
 - F - Future Line
- ② **Styles**
 - 01 - Full Frame Inset Frost
- ③ **Lighting Styles**
 - d - Direct Light
 - b - Direct & Indirect Light
- ④ **Standard Sizes**
 - 2436-24"x36"
 - 2448-24"x48"
 - 3042-30"x42"
 - 3048-30"x48"
 - 3060-30"x60"
 - 3648-36"x48"
 - 3660-36"x60"
 - 3672-36"x72"
 - 4254-42"x54"
 - 4284-42"x84"
 - Custom (Ex: 3173-31.4"x72.5")
(Specify the accurate size in additional custom specification notes)
- ⑤ **Outputs**
 - S - Standard Output
(550 lumens/ft; 4.5 watts/ft)
 - H - High Output
(750 lumens/ft; 6 watts/ft)
- ⑥ **LED CCT (All CRI 90+)**
 - 27 - 2700k
 - 30 - 3000k
 - 35 - 3500k
 - 40 - 4000k
 - 50 - 5000k
 - 00 - Color Switchable
(Only available with high output with touch sensor & CCT Sync accessory)
- ⑦ **Drivers**
 - V - 100-277VAC 0-10 Dimmable
 - E - 100-277VAC ELV Dimmable
 - N - 100-277VAC Non Dimming
(Mirrors with touch sensors have to use a non-dimming driver)
- ⑧ **Mounting**
 - 1 - Vertical
 - 2 - Horizontal
- ⑨ **Accessories**
 - NA - None
 - TS - Touch Sensor
 - NL - Night Light
 - AF - Anti-Fog
 - AN - Anti-Fog & Night Light
 - AT - Anti-Fog & Touch Sensor
 - NT - Night Light & Touch Sensor
 - AL - Anti-Fog, Night Light, Touch Sensor
 - CT - CCT Sync
 - CN - CCT Sync & Night Light
 - CF - CCT Sync & Anti-Fog
 - CL - CCT Sync, Night Light, Anti-Fog

Additional Custom Specification

- Low-Iron Glasses
- Antimicrobial Powder Coat
- Powder Coated Chassis
- Custom Inset & Frosting Sizes (Up to 2")



F02i



2700K 3000K 3500K 4000K 5000K 6000K

ITEM CODE CONFIGURATION



Sample Item Code **F 0 2 i 3 6 4 8 H 4 0 N 1 NA**
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨



- ① **Types**
 - F - Future Line
- ② **Styles**
 - 02 - Full Frame Edge Frost
- ③ **Lighting Styles**
 - i - Indirect Light
- ④ **Standard Sizes**
 - 2436-24"x36"
 - 2448-24"x48"
 - 3042-30"x42"
 - 3048-30"x48"
 - 3060-30"x60"
 - 3648-36"x48"
 - 3660-36"x60"
 - 3672-36"x72"
 - 4254-42"x54"
 - 4284-42"x84"
 - Custom (Ex: 3173-31.4"x72.5")
(Specify the accurate size in additional custom specification notes)
- ⑤ **Outputs**
 - S - Standard Output
(550 lumens/ft; 4.5 watts/ft)
 - H - High Output
(750 lumens/ft; 6 watts/ft)
- ⑥ **LED CCT (All CRI 90+)**
 - 27 - 2700k
 - 30 - 3000k
 - 35 - 3500k
 - 40 - 4000k
 - 50 - 5000k
 - 00 - Color Switchable
(Only available with high output with touch sensor & CCT Sync accessory)
- ⑦ **Drivers**
 - V - 100-277VAC 0-10 Dimmable
 - E - 100-277VAC ELV Dimmable
 - N - 100-277VAC Non Dimming
(Mirrors with touch sensors have to use a non-dimming driver)
- ⑧ **Mounting**
 - 1 - Vertical
 - 2 - Horizontal
- ⑨ **Accessories**
 - NA - None
 - TS - Touch Sensor
 - NL - Night Light
 - AF - Anti-Fog
 - AN - Anti-Fog & Night Light
 - AT - Anti-Fog & Touch Sensor
 - NT - Night Light & Touch Sensor
 - AL - Anti-Fog, Night Light, Touch Sensor
 - CT - CCT Sync
 - CN - CCT Sync & Night Light
 - CF - CCT Sync & Anti-Fog
 - CL - CCT Sync, Night Light, Anti-Fog

Additional Custom Specification

- Low-Iron Glasses
- Antimicrobial Powder Coat
- Powder Coated Chassis
- Custom Inset & Frosting Sizes (Up to 2")



ITEM CODE CONFIGURATION

Sample Item Code **F 0 3 b 2 4 8 0 S 4 0 N 2 NA**



- ① **Types**

 - F - Future Line
- ② **Styles**

 - 03 - Double Long Side Inset Frost
- ③ **Lighting Styles**

 - d - Direct Light
 - b - Direct & Indirect Light
- ④ **Standard Sizes**

 - 2436-24"x36"
 - 2448-24"x48"
 - 3042-30"x42"
 - 3048-30"x48"
 - 3060-30"x60"
 - 3648-36"x48"
 - 3660-36"x60"
 - 3672-36"x72"
 - 4254-42"x54"
 - 4284-42"x84"
 - Custom (Ex: 3173-31.4"x72.5")
(Specify the accurate size in additional custom specification notes)
- ⑤ **Outputs**

 - S - Standard Output
(550 lumens/ft; 4.5 watts/ft)
 - H - High Output
(750 lumens/ft; 6 watts/ft)
- ⑥ **LED CCT (All CRI 90+)**

 - 27 - 2700k
 - 30 - 3000k
 - 35 - 3500k
 - 40 - 4000k
 - 50 - 5000k
 - 00 - Color Switchable
(Only available with high output with touch sensor & CCT Sync accessory)
- ⑦ **Drivers**

 - V - 100-277VAC 0-10 Dimmable
 - E - 100-277VAC ELV Dimmable
 - N - 100-277VAC Non Dimming
(Mirrors with touch sensors have to use a non-dimming driver)
- ⑧ **Mounting**

 - 1 - Vertical
 - 2 - Horizontal
- ⑨ **Accessories**

 - NA - None
 - TS - Touch Sensor
 - NL - Night Light
 - AF - Anti-Fog
 - AN - Anti-Fog & Night Light
 - AT - Anti-Fog & Touch Sensor
 - NT - Night Light & Touch Sensor
 - AL - Anti-Fog, Night Light, Touch Sensor
 - CT - CCT Sync
 - CN - CCT Sync & Night Light
 - CF - CCT Sync & Anti-Fog
 - CL - CCT Sync, Night Light, Anti-Fog

Additional Custom Specification

- Low-Iron Glasses
- Antimicrobial Powder Coat
- Powder Coated Chassis
- Custom Inset & Frosting Sizes (Up to 2")

ITEM CODE CONFIGURATION

Sample Item Code **F 0 4 i 2 4 7 0 H 4 0 E 1 NA**



- ① **Types**

 - F - Future Line
- ② **Styles**

 - 04 - Double Long Side Edge Frost
- ③ **Lighting Styles**

 - i - Indirect Light
- ④ **Standard Sizes**

 - 2436-24"x36"
 - 2448-24"x48"
 - 3042-30"x42"
 - 3048-30"x48"
 - 3060-30"x60"
 - 3648-36"x48"
 - 3660-36"x60"
 - 3672-36"x72"
 - 4254-42"x54"
 - 4284-42"x84"
 - Custom (Ex: 3173-31.4"x72.5")
(Specify the accurate size in additional custom specification notes)
- ⑤ **Outputs**

 - S - Standard Output
(550 lumens/ft; 4.5 watts/ft)
 - H - High Output
(750 lumens/ft; 6 watts/ft)
- ⑥ **LED CCT (All CRI 90+)**

 - 27 - 2700k
 - 30 - 3000k
 - 35 - 3500k
 - 40 - 4000k
 - 50 - 5000k
 - 00 - Color Switchable
(Only available with high output with touch sensor & CCT Sync accessory)
- ⑦ **Drivers**

 - V - 100-277VAC 0-10 Dimmable
 - E - 100-277VAC ELV Dimmable
 - N - 100-277VAC Non Dimming
(Mirrors with touch sensors have to use a non-dimming driver)
- ⑧ **Mounting**

 - 1 - Vertical
 - 2 - Horizontal
- ⑨ **Accessories**

 - NA - None
 - TS - Touch Sensor
 - NL - Night Light
 - AF - Anti-Fog
 - AN - Anti-Fog & Night Light
 - AT - Anti-Fog & Touch Sensor
 - NT - Night Light & Touch Sensor
 - AL - Anti-Fog, Night Light, Touch Sensor
 - CT - CCT Sync
 - CN - CCT Sync & Night Light
 - CF - CCT Sync & Anti-Fog
 - CL - CCT Sync, Night Light, Anti-Fog

Additional Custom Specification

- Low-Iron Glasses
- Antimicrobial Powder Coat
- Powder Coated Chassis
- Custom Inset & Frosting Sizes (Up to 2")



F05i



F06i



2700K 3000K 3500K 4000K 5000K 6000K 2700K 3000K 3500K 4000K 5000K 6000K

ITEM CODE CONFIGURATION

Sample Item Code F 0 5 i 3 0 4 2 H 0 0 N 2 T S



- ① Types
 - F - Future Line
- ② Styles
 - 05 - No Frost, All Sides Illumination
- ③ Lighting Styles
 - i - Indirect Light

- ④ Standard Sizes
 - 2436-24"x36"
 - 2448-24"x48"
 - 3042-30"x42"
 - 3048-30"x48"
 - 3060-30"x60"
 - 3648-36"x48"
 - 3660-36"x60"
 - 3672-36"x72"
 - 4254-42"x54"
 - 4284-42"x84"
 - Custom (Ex: 3173-31.4"x72.5")
(Specify the accurate size in additional custom specification notes)

- ⑤ Outputs
 - S - Standard Output
(550 lumens/ft; 4.5 watts/ft)
 - H - High Output
(750 lumens/ft; 6 watts/ft)
- ⑥ LED CCT (All CRI 90+)
 - 27 - 2700k
 - 30 - 3000k
 - 35 - 3500k
 - 40 - 4000k
 - 50 - 5000k
 - 00 - Color Switchable
(Only available with high output with touch sensor & CCT Sync accessory)

- ⑧ Mounting
 - 1 - Vertical
 - 2 - Horizontal
- ⑨ Accessories
 - NA - None
 - TS - Touch Sensor
 - NL - Night Light
 - AF - Anti-Fog
 - AN - Anti-Fog & Night Light
 - AT - Anti-Fog & Touch Sensor
 - NT - Night Light & Touch Sensor
 - AL - Anti-Fog, Night Light, Touch Sensor

Additional Custom Specification

- Low-Iron Glasses
- Antimicrobial Powder Coat
- Powder Coated Chassis
- Custom Inset & Frosting Sizes (Up to 2")

ITEM CODE CONFIGURATION

Sample Item Code F 0 6 i 2 4 3 6 S 3 0 N 1 N A



- ① Types
 - F - Future Line
- ② Styles
 - 06 - Double Short Side Edge Frost
- ③ Lighting Styles
 - i - Indirect Light

- ④ Standard Sizes
 - 2436-24"x36"
 - 2448-24"x48"
 - 3042-30"x42"
 - 3048-30"x48"
 - 3060-30"x60"
 - 3648-36"x48"
 - 3660-36"x60"
 - 3672-36"x72"
 - 4254-42"x54"
 - 4284-42"x84"
 - Custom (Ex: 3173-31.4"x72.5")
(Specify the accurate size in additional custom specification notes)

- ⑤ Outputs
 - S - Standard Output
(550 lumens/ft; 4.5 watts/ft)
 - H - High Output
(750 lumens/ft; 6 watts/ft)
- ⑥ LED CCT (All CRI 90+)
 - 27 - 2700k
 - 30 - 3000k
 - 35 - 3500k
 - 40 - 4000k
 - 50 - 5000k
 - 00 - Color Switchable
(Only available with high output with touch sensor & CCT Sync accessory)

- ⑧ Mounting
 - 1 - Vertical
 - 2 - Horizontal
- ⑨ Accessories
 - NA - None
 - TS - Touch Sensor
 - NL - Night Light
 - AF - Anti-Fog
 - AN - Anti-Fog & Night Light
 - AT - Anti-Fog & Touch Sensor
 - NT - Night Light & Touch Sensor
 - AL - Anti-Fog, Night Light, Touch Sensor
 - CT - CCT Sync
 - CN - CCT Sync & Night Light
 - CF - CCT Sync & Anti-Fog
 - CL - CCT Sync, Night Light, Anti-Fog

Additional Custom Specification

- Low-Iron Glasses
- Antimicrobial Powder Coat
- Powder Coated Chassis
- Custom Inset & Frosting Sizes (Up to 2")



F 07 b



F 07 d



2700K 3000K 3500K 4000K 5000K 6000K

ITEM CODE CONFIGURATION

Sample Item Code **F 07 b 3 6 4 8 S 30 N 2 NA**
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨



- ① **Types**

 - F - Future Line
- ② **Styles**

 - 07 - Double Short Side Inset Frost
- ③ **Lighting Styles**

 - d - Direct Light
 - b - Direct & Indirect Light
- ④ **Standard Sizes**

 - 2436-24"x36"
 - 2448-24"x48"
 - 3042-30"x42"
 - 3048-30"x48"
 - 3060-30"x60"
 - 3648-36"x48"
 - 3660-36"x60"
 - 3672-36"x72"
 - 4254-42"x54"
 - 4284-42"x84"
 - Custom (Ex: 3173-31.4"x72.5")
(Specify the accurate size in additional custom specification notes)
- ⑤ **Outputs**

 - S - Standard Output
(550 lumens/ft; 4.5 watts/ft)
 - H - High Output
(750 lumens/ft; 6 watts/ft)
- ⑥ **LED CCT (All CRI 90+)**

 - 27 - 2700k
 - 30 - 3000k
 - 35 - 3500k
 - 40 - 4000k
 - 50 - 5000k
 - 00 - Color Switchable
(Only available with high output with touch sensor & CCT Sync accessory)
- ⑦ **Drivers**

 - V - 100-277VAC 0-10 Dimmable
 - E - 100-277VAC ELV Dimmable
 - N - 100-277VAC Non Dimming
(Mirrors with touch sensors have to use a non-dimming driver)
- ⑧ **Mounting**

 - 1 - Vertical
 - 2 - Horizontal
- ⑨ **Accessories**

 - NA - None
 - TS - Touch Sensor
 - NL - Night Light
 - AF - Anti-Fog
 - AN - Anti-Fog & Night Light
 - AT - Anti-Fog & Touch Sensor
 - NT - Night Light & Touch Sensor
 - AL - Anti-Fog, Night Light, Touch Sensor
 - CT - CCT Sync
 - CN - CCT Sync & Night Light
 - CF - CCT Sync & Anti-Fog
 - CL - CCT Sync, Night Light, Anti-Fog

Additional Custom Specification

- Low-Iron Glasses
- Antimicrobial Powder Coat
- Powder Coated Chassis
- Custom Inset & Frosting Sizes (Up to 2")



F 08 i



2700K 3000K 3500K 4000K 5000K 6000K

ITEM CODE CONFIGURATION

Sample Item Code **F 08 i 3 0 4 2 H 30 N 2 NA**
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨



- ① **Types**

 - F - Future Line
- ② **Styles**

 - 08 - Single Long Side Edge Frost
- ③ **Lighting Styles**

 - i - Indirect Light
- ④ **Standard Sizes**

 - 2436-24"x36"
 - 2448-24"x48"
 - 3042-30"x42"
 - 3048-30"x48"
 - 3060-30"x60"
 - 3648-36"x48"
 - 3660-36"x60"
 - 3672-36"x72"
 - 4254-42"x54"
 - 4284-42"x84"
 - Custom (Ex: 3173-31.4"x72.5")
(Specify the accurate size in additional custom specification notes)
- ⑤ **Outputs**

 - S - Standard Output
(550 lumens/ft; 4.5 watts/ft)
 - H - High Output
(750 lumens/ft; 6 watts/ft)
- ⑥ **LED CCT (All CRI 90+)**

 - 27 - 2700k
 - 30 - 3000k
 - 35 - 3500k
 - 40 - 4000k
 - 50 - 5000k
 - 00 - Color Switchable
(Only available with high output with touch sensor & CCT Sync accessory)
- ⑦ **Drivers**

 - V - 100-277VAC 0-10 Dimmable
 - E - 100-277VAC ELV Dimmable
 - N - 100-277VAC Non Dimming
(Mirrors with touch sensors have to use a non-dimming driver)
- ⑧ **Mounting**

 - 1 - Vertical
 - 2 - Horizontal
- ⑨ **Accessories**

 - NA - None
 - TS - Touch Sensor
 - NL - Night Light
 - AF - Anti-Fog
 - AN - Anti-Fog & Night Light
 - AT - Anti-Fog & Touch Sensor
 - NT - Night Light & Touch Sensor
 - AL - Anti-Fog, Night Light, Touch Sensor
 - CT - CCT Sync
 - CN - CCT Sync & Night Light
 - CF - CCT Sync & Anti-Fog
 - CL - CCT Sync, Night Light, Anti-Fog

Additional Custom Specification


- Low-Iron Glasses
- Antimicrobial Powder Coat
- Powder Coated Chassis
- Custom Inset & Frosting Sizes (Up to 2")



F 09 b



F 09 d

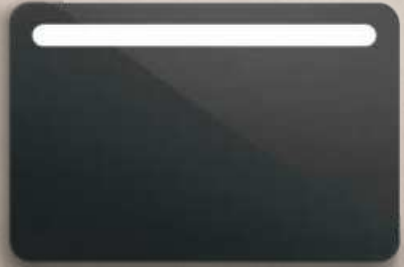

2700K 3000K 3500K 4000K 5000K 6000K

ITEM CODE CONFIGURATION

Sample Item Code **F 09 d 3042H 00 N 2 TS**
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨



- ① **Types**
 - F - Future Line
- ② **Styles**
 - 09 - Single Long Side Inset Frost
- ③ **Lighting Styles**
 - d - Direct Light
 - b - Direct & Indirect Light
- ④ **Standard Sizes**
 - 2436-24"x36"
 - 2448-24"x48"
 - 3042-30"x42"
 - 3048-30"x48"
 - 3060-30"x60"
 - 3648-36"x48"
 - 3660-36"x60"
 - 3672-36"x72"
 - 4254-42"x54"
 - 4284-42"x84"
 - Custom (Ex: 3173-31.4"x72.5")
(Specify the accurate size in additional custom specification notes)
- ⑤ **Outputs**
 - S - Standard Output
(550 lumens/ft; 4.5 watts/ft)
 - H - High Output
(750 lumens/ft; 6 watts/ft)
- ⑥ **LED CCT** (All CRI 90+)
 - 27 - 2700k
 - 30 - 3000k
 - 35 - 3500k
 - 40 - 4000k
 - 50 - 5000k
 - 00 - Color Switchable
(Only available with high output with touch sensor & CCT Sync accessory)
- ⑦ **Drivers**
 - V - 100-277VAC 0-10 Dimmable
 - E - 100-277VAC ELV Dimmable
 - N - 100-277VAC Non Dimming
(Mirrors with touch sensors have to use a non-dimming driver)
- ⑧ **Mounting**
 - 1 - Vertical
 - 2 - Horizontal
- ⑨ **Accessories**
 - NA - None
 - TS - Touch Sensor
 - NL - Night Light
 - AF - Anti-Fog
 - AN - Anti-Fog & Night Light
 - AT - Anti-Fog & Touch Sensor
 - NT - Night Light & Touch Sensor
 - AL - Anti-Fog, Night Light, Touch Sensor
 - CT - CCT Sync
 - CN - CCT Sync & Night Light
 - CF - CCT Sync & Anti-Fog
 - CL - CCT Sync, Night Light, Anti-Fog

Additional Custom Specification

- Low-Iron Glasses
- Antimicrobial Powder Coat
- Powder Coated Chassis
- Custom Inset & Frosting Sizes (Up to 2")



F 10 i



2700K 3000K 3500K 4000K 5000K 6000K

ITEM CODE CONFIGURATION

Sample Item Code **F 10 i 2436H 00 N 1 TS**
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨



- ① **Types**
 - F - Future Line
- ② **Styles**
 - 10 - Single Short Side Edge Frost
- ③ **Lighting Styles**
 - i - Indirect Light
- ④ **Standard Sizes**
 - 2436-24"x36"
 - 2448-24"x48"
 - 3042-30"x42"
 - 3048-30"x48"
 - 3060-30"x60"
 - 3648-36"x48"
 - 3660-36"x60"
 - 3672-36"x72"
 - 4254-42"x54"
 - 4284-42"x84"
 - Custom (Ex: 3173-31.4"x72.5")
(Specify the accurate size in additional custom specification notes)
- ⑤ **Outputs**
 - S - Standard Output
(550 lumens/ft; 4.5 watts/ft)
 - H - High Output
(750 lumens/ft; 6 watts/ft)
- ⑥ **LED CCT** (All CRI 90+)
 - 27 - 2700k
 - 30 - 3000k
 - 35 - 3500k
 - 40 - 4000k
 - 50 - 5000k
 - 00 - Color Switchable
(Only available with high output with touch sensor & CCT Sync accessory)
- ⑦ **Drivers**
 - V - 100-277VAC 0-10 Dimmable
 - E - 100-277VAC ELV Dimmable
 - N - 100-277VAC Non Dimming
(Mirrors with touch sensors have to use a non-dimming driver)
- ⑧ **Mounting**
 - 1 - Vertical
 - 2 - Horizontal
- ⑨ **Accessories**
 - NA - None
 - TS - Touch Sensor
 - NL - Night Light
 - AF - Anti-Fog
 - AN - Anti-Fog & Night Light
 - AT - Anti-Fog & Touch Sensor
 - NT - Night Light & Touch Sensor
 - AL - Anti-Fog, Night Light, Touch Sensor
 - CT - CCT Sync
 - CN - CCT Sync & Night Light
 - CF - CCT Sync & Anti-Fog
 - CL - CCT Sync, Night Light, Anti-Fog

Additional Custom Specification

- Low-Iron Glasses
- Antimicrobial Powder Coat
- Powder Coated Chassis
- Custom Inset & Frosting Sizes (Up to 2")

F11b



F11d



2700K 3000K 3500K 4000K 5000K 6000K

ITEM CODE CONFIGURATION

Sample Item Code **F 1 1 b 3 0 4 2 H 3 0 N 1 NA**
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨



- ① **Types**

 - F - Future Line
- ② **Styles**

 - 11 - Single Short Side Inset Frost
- ③ **Lighting Styles**

 - d - Direct Light
 - b - Direct & Indirect Light
- ④ **Standard Sizes**

 - 2436-24"x36"
 - 2448-24"x48"
 - 3042-30"x42"
 - 3048-30"x48"
 - 3060-30"x60"
 - 3648-36"x48"
 - 3660-36"x60"
 - 3672-36"x72"
 - 4254-42"x54"
 - 4284-42"x84"
 - Custom (Ex: 3173-31.4"x72.5")
(Specify the accurate size in additional custom specification notes)
- ⑤ **Outputs**

 - S - Standard Output
(550 lumens/ft; 4.5 watts/ft)
 - H - High Output
(750 lumens/ft; 6 watts/ft)
- ⑥ **LED CCT (All CRI 90+)**

 - 27 - 2700k
 - 30 - 3000k
 - 35 - 3500k
 - 40 - 4000k
 - 50 - 5000k
 - 00 - Color Switchable
(Only available with high output with touch sensor & CCT Sync accessory)
- ⑦ **Drivers**

 - V - 100-277VAC 0-10 Dimmable
 - E - 100-277VAC ELV Dimmable
 - N - 100-277VAC Non Dimming
(Mirrors with touch sensors have to use a non-dimming driver)
- ⑧ **Mounting**

 - 1 - Vertical
 - 2 - Horizontal
- ⑨ **Accessories**

 - NA - None
 - TS - Touch Sensor
 - NL - Night Light
 - AF - Anti-Fog
 - AN - Anti-Fog & Night Light
 - AT - Anti-Fog & Touch Sensor
 - NT - Night Light & Touch Sensor
 - AL - Anti-Fog, Night Light, Touch Sensor
 - CT - CCT Sync
 - CN - CCT Sync & Night Light
 - CF - CCT Sync & Anti-Fog
 - CL - CCT Sync, Night Light, Anti-Fog

Additional Custom Specification

- Low-Iron Glasses
- Antimicrobial Powder Coat
- Powder Coated Chassis
- Custom Inset & Frosting Sizes (Up to 2")





FUTURE DECO LINE

Rounded Corners with Thin Frame

Color Availability:

- White
- Gold
- Silver
- Black
- Bronze
- Custom



F01b



F01d



F02i



F03b




F03d




F04i




F05i




F06i




F07b




F07d




F08i



F09b




F09d



F10i



F11b



F11d



R01b



R01d



2700K 3000K 3500K 4000K 5000K 6000K

ITEM CODE CONFIGURATION

Sample Item Code **R 0 1 d 6 0 1 0 H 5 0 N 1 B F A F**
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩



- ① **Types**

 - R - Future Deco Thin Frame
- ② **Styles**

 - 01 - Full Frame Inset Frost
- ③ **Lighting Styles**

 - d - Direct Light
 - b - Direct & Indirect Light
- ④ **Standard Sizes**

 - 2436-24"x36"
 - 2448-24"x48"
 - 3042-30"x42"
 - 3048-30"x48"
 - 3060-30"x60"
 - 3648-36"x48"
 - 3660-36"x60"
 - 3672-36"x72"
 - 4254-42"x54"
 - 4284-42"x84"
 - Custom (Ex: 3173-31.4"x72.5")
(Specify the accurate size in additional custom specification notes)
- ⑤ **Outputs**

 - S - Standard Output
(550 lumens/ft; 4.5 watts/ft)
 - H - High Output
(750 lumens/ft; 6 watts/ft)
- ⑥ **LED CCT** (All CRI 90+)

 - 27 - 2700k
 - 30 - 3000k
 - 35 - 3500k
 - 40 - 4000k
 - 50 - 5000k
 - 00 - Color Switchable
(Only available with high output with touch sensor & CCT Sync accessory)
- ⑦ **Drivers**

 - V - 100-277VAC 0-10 Dimmable
 - E - 100-277VAC ELV Dimmable
 - N - 100-277VAC Non Dimming
(Mirrors with touch sensors have to use a non-dimming driver)
- ⑧ **Mounting**

 - 1 - Vertical
 - 2 - Horizontal
- ⑨ **Frame Colors**

 - BF - Black Frame
 - SF - Silver Frame
 - GF - Gold Frame
 - WF - White Frame
 - BR - Bronze Frame
 - CF - Custom Frame
(Specify color on website)
- ⑩ **Accessories**

 - NA - None
 - TS - Touch Sensor
 - NL - Night Light
 - AF - Anti-Fog
 - CT - CCT Sync
 - AN - Anti-Fog & Night Light
 - AT - Anti-Fog & Touch Sensor
 - AL - Anti-Fog, Night Light, Touch Sensor
 - NT - Night Light & Touch Sensor
 - CN - CCT Sync & Night Light
 - CF - CCT Sync & Anti-Fog
 - CL - CCT Sync, Night Light, Anti-Fog
- Additional Custom Specification**

 - Low-Iron Glasses
 - Antimicrobial Powder Coat
 - Powder Coated Chassis
 - Custom Inset & Frosting Sizes (Up to 2")



R02i



2700K 3000K 3500K 4000K 5000K 6000K

ITEM CODE CONFIGURATION

Sample Item Code **R 0 2 i 3 6 4 8 H 0 0 N 1 B F T S**
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩



- ① **Types**

 - R - Future Deco Thin Frame
- ② **Styles**

 - 02 - Full Frame Edge Frost
- ③ **Lighting Styles**

 - i - Indirect Light
- ④ **Standard Sizes**

 - 2436-24"x36"
 - 2448-24"x48"
 - 3042-30"x42"
 - 3048-30"x48"
 - 3060-30"x60"
 - 3648-36"x48"
 - 3660-36"x60"
 - 3672-36"x72"
 - 4254-42"x54"
 - 4284-42"x84"
 - Custom (Ex: 3173-31.4"x72.5")
(Specify the accurate size in additional custom specification notes)
- ⑤ **Outputs**

 - S - Standard Output
(550 lumens/ft; 4.5 watts/ft)
 - H - High Output
(750 lumens/ft; 6 watts/ft)
- ⑥ **LED CCT** (All CRI 90+)

 - 27 - 2700k
 - 30 - 3000k
 - 35 - 3500k
 - 40 - 4000k
 - 50 - 5000k
 - 00 - Color Switchable
(Only available with high output with touch sensor & CCT Sync accessory)
- ⑦ **Drivers**

 - V - 100-277VAC 0-10 Dimmable
 - E - 100-277VAC ELV Dimmable
 - N - 100-277VAC Non Dimming
(Mirrors with touch sensors have to use a non-dimming driver)
- ⑧ **Mounting**

 - 1 - Vertical
 - 2 - Horizontal
- ⑨ **Frame Colors**

 - BF - Black Frame
 - SF - Silver Frame
 - GF - Gold Frame
 - WF - White Frame
 - BR - Bronze Frame
 - CF - Custom Frame
(Specify color on website)
- ⑩ **Accessories**

 - NA - None
 - TS - Touch Sensor
 - NL - Night Light
 - AF - Anti-Fog
 - CT - CCT Sync
 - AN - Anti-Fog & Night Light
 - AT - Anti-Fog & Touch Sensor
 - AL - Anti-Fog, Night Light, Touch Sensor
 - NT - Night Light & Touch Sensor
 - CN - CCT Sync & Night Light
 - CF - CCT Sync & Anti-Fog
 - CL - CCT Sync, Night Light, Anti-Fog
- Additional Custom Specification**

 - Low-Iron Glasses
 - Antimicrobial Powder Coat
 - Powder Coated Chassis
 - Custom Inset & Frosting Sizes (Up to 2")



R 0 3 b



R 0 3 d



2700K 3000K 3500K 4000K 5000K 6000K

ITEM CODE CONFIGURATION

Sample Item Code R 0 3 b 2 4 8 0 S 4 0 N 2 S F N A



- ① Types

 - R - Future Deco Thin Frame
- ② Styles

 - 03 - Double Long Side Inset Frost
- ③ Lighting Styles

 - d - Direct Light
 - b - Direct & Indirect Light
- ④ Standard Sizes

 - 2436-24"x36"
 - 2448-24"x48"
 - 3042-30"x42"
 - 3048-30"x48"
 - 3060-30"x60"
 - 3648-36"x48"
 - 3660-36"x60"
 - 3672-36"x72"
 - 4254-42"x54"
 - 4284-42"x84"
 - Custom (Ex: 3173-31.4"x72.5") (Specify the accurate size in additional custom specification notes)
- ⑤ Outputs

 - S - Standard Output (550 lumens/ft; 4.5 watts/ft)
 - H - High Output (750 lumens/ft; 6 watts/ft)
- ⑥ LED CCT (All CRI 90+)

 - 27 - 2700k
 - 30 - 3000k
 - 35 - 3500k
 - 40 - 4000k
 - 50 - 5000k
 - 00 - Color Switchable (Only available with high output with touch sensor & CCT Sync accessory)
- ⑦ Drivers

 - V - 100-277VAC 0-10 Dimmable
 - E - 100-277VAC ELV Dimmable
 - N - 100-277VAC Non Dimming (Mirrors with touch sensors have to use a non-dimming driver)
- ⑧ Mounting

 - 1 - Vertical
 - 2 - Horizontal
- ⑨ Frame Colors

 - BF - Black Frame
 - SF - Silver Frame
 - GF - Gold Frame
 - WF - White Frame
 - BR - Bronze Frame
 - CF - Custom Frame (Specify color on website)
- ⑩ Accessories

 - NA - None
 - TS - Touch Sensor
 - NL - Night Light
 - AF - Anti-Fog
 - CT - CCT Sync
 - AN - Anti-Fog & Night Light
 - AT - Anti-Fog & Touch Sensor
 - AL - Anti-Fog, Night Light, Touch Sensor
 - NT - Night Light & Touch Sensor
 - CN - CCT Sync & Night Light
 - CF - CCT Sync & Anti-Fog
 - CL - CCT Sync, Night Light, Anti-Fog
- Additional Custom Specification

 - Low-Iron Glasses
 - Antimicrobial Powder Coat
 - Powder Coated Chassis
 - Custom Inset & Frosting Sizes (Up to 2")



R 0 4 i



2700K 3000K 3500K 4000K 5000K 6000K

ITEM CODE CONFIGURATION

Sample Item Code R 0 4 i 2 4 7 0 S 3 0 V 1 G F N A



- ① Types

 - R - Future Deco Thin Frame
- ② Styles

 - 04 - Double Long Side Edge Frost
- ③ Lighting Styles

 - i - Indirect Light
- ④ Standard Sizes

 - 2436-24"x36"
 - 2448-24"x48"
 - 3042-30"x42"
 - 3048-30"x48"
 - 3060-30"x60"
 - 3648-36"x48"
 - 3660-36"x60"
 - 3672-36"x72"
 - 4254-42"x54"
 - 4284-42"x84"
 - Custom (Ex: 3173-31.4"x72.5") (Specify the accurate size in additional custom specification notes)
- ⑤ Outputs

 - S - Standard Output (550 lumens/ft; 4.5 watts/ft)
 - H - High Output (750 lumens/ft; 6 watts/ft)
- ⑥ LED CCT (All CRI 90+)

 - 27 - 2700k
 - 30 - 3000k
 - 35 - 3500k
 - 40 - 4000k
 - 50 - 5000k
 - 00 - Color Switchable (Only available with high output with touch sensor & CCT Sync accessory)
- ⑦ Drivers

 - V - 100-277VAC 0-10 Dimmable
 - E - 100-277VAC ELV Dimmable
 - N - 100-277VAC Non Dimming (Mirrors with touch sensors have to use a non-dimming driver)
- ⑧ Mounting

 - 1 - Vertical
 - 2 - Horizontal
- ⑨ Frame Colors

 - BF - Black Frame
 - SF - Silver Frame
 - GF - Gold Frame
 - WF - White Frame
 - BR - Bronze Frame
 - CF - Custom Frame (Specify color on website)
- ⑩ Accessories

 - NA - None
 - TS - Touch Sensor
 - NL - Night Light
 - AF - Anti-Fog
 - CT - CCT Sync
 - AN - Anti-Fog & Night Light
 - AT - Anti-Fog & Touch Sensor
 - AL - Anti-Fog, Night Light, Touch Sensor
 - NT - Night Light & Touch Sensor
 - CN - CCT Sync & Night Light
 - CF - CCT Sync & Anti-Fog
 - CL - CCT Sync, Night Light, Anti-Fog
- Additional Custom Specification

 - Low-Iron Glasses
 - Antimicrobial Powder Coat
 - Powder Coated Chassis
 - Custom Inset & Frosting Sizes (Up to 2")



R05i



2700K 3000K 3500K 4000K 5000K 6000K

ITEM CODE CONFIGURATION

Sample Item Code R05i3042H00N2BF TS



- ① Types

 - R - Future Deco Thin Frame
- ② Styles

 - 05 - No Frost, All Sides Illumination
- ③ Lighting Styles

 - i - Indirect Light
- ④ Standard Sizes

 - 2436-24"x36"
 - 2448-24"x48"
 - 3042-30"x42"
 - 3048-30"x48"
 - 3060-30"x60"
 - 3648-36"x48"
 - 3660-36"x60"
 - 3672-36"x72"
 - 4254-42"x54"
 - 4284-42"x84"
 - Custom (Ex: 3173-31.4"x72.5") (Specify the accurate size in additional custom specification notes)
- ⑤ Outputs

 - S - Standard Output (550 lumens/ft; 4.5 watts/ft)
 - H - High Output (750 lumens/ft; 6 watts/ft)
- ⑥ LED CCT (All CRI 90+)

 - 27 - 2700k
 - 30 - 3000k
 - 35 - 3500k
 - 40 - 4000k
 - 50 - 5000k
 - 00 - Color Switchable (Only available with high output with touch sensor & CCT Sync accessory)
- ⑦ Drivers

 - V - 100-277VAC 0-10 Dimmable
 - E - 100-277VAC ELV Dimmable
 - N - 100-277VAC Non Dimming (Mirrors with touch sensors have to use a non-dimming driver)
- ⑧ Mounting

 - 1 - Vertical
 - 2 - Horizontal
- ⑨ Frame Colors

 - BF - Black Frame
 - SF - Silver Frame
 - GF - Gold Frame
 - WF - White Frame
 - BR - Bronze Frame
 - CF - Custom Frame (Specify color on website)
- ⑩ Accessories

 - NA - None
 - TS - Touch Sensor
 - NL - Night Light
 - AF - Anti-Fog
 - CT - CCT Sync
 - AN - Anti-Fog & Night Light
 - AT - Anti-Fog & Touch Sensor
 - AL - Anti-Fog, Night Light, Touch Sensor
 - NT - Night Light & Touch Sensor
 - CN - CCT Sync & Night Light
 - CF - CCT Sync & Anti-Fog
 - CL - CCT Sync, Night Light, Anti-Fog
- Additional Custom Specification

 - Low-Iron Glasses
 - Antimicrobial Powder Coat
 - Powder Coated Chassis
 - Custom Inset & Frosting Sizes (Up to 2")



R06i



2700K 3000K 3500K 4000K 5000K 6000K

ITEM CODE CONFIGURATION

Sample Item Code R06i2436S30N1GF NA



- ① Types

 - R - Future Deco Thin Frame
- ② Styles

 - 06 - Double Short Side Edge Frost
- ③ Lighting Styles

 - i - Indirect Light
- ④ Standard Sizes

 - 2436-24"x36"
 - 2448-24"x48"
 - 3042-30"x42"
 - 3048-30"x48"
 - 3060-30"x60"
 - 3648-36"x48"
 - 3660-36"x60"
 - 3672-36"x72"
 - 4254-42"x54"
 - 4284-42"x84"
 - Custom (Ex: 3173-31.4"x72.5") (Specify the accurate size in additional custom specification notes)
- ⑤ Outputs

 - S - Standard Output (550 lumens/ft; 4.5 watts/ft)
 - H - High Output (750 lumens/ft; 6 watts/ft)
- ⑥ LED CCT (All CRI 90+)

 - 27 - 2700k
 - 30 - 3000k
 - 35 - 3500k
 - 40 - 4000k
 - 50 - 5000k
 - 00 - Color Switchable (Only available with high output with touch sensor & CCT Sync accessory)
- ⑦ Drivers

 - V - 100-277VAC 0-10 Dimmable
 - E - 100-277VAC ELV Dimmable
 - N - 100-277VAC Non Dimming (Mirrors with touch sensors have to use a non-dimming driver)
- ⑧ Mounting

 - 1 - Vertical
 - 2 - Horizontal
- ⑨ Frame Colors

 - BF - Black Frame
 - SF - Silver Frame
 - GF - Gold Frame
 - WF - White Frame
 - BR - Bronze Frame
 - CF - Custom Frame (Specify color on website)
- ⑩ Accessories

 - NA - None
 - TS - Touch Sensor
 - NL - Night Light
 - AF - Anti-Fog
 - CT - CCT Sync
 - AN - Anti-Fog & Night Light
 - AT - Anti-Fog & Touch Sensor
 - AL - Anti-Fog, Night Light, Touch Sensor
 - NT - Night Light & Touch Sensor
 - CN - CCT Sync & Night Light
 - CF - CCT Sync & Anti-Fog
 - CL - CCT Sync, Night Light, Anti-Fog
- Additional Custom Specification

 - Low-Iron Glasses
 - Antimicrobial Powder Coat
 - Powder Coated Chassis
 - Custom Inset & Frosting Sizes (Up to 2")



R 07 b



R 07 d



2700K 3000K 3500K 4000K 5000K 6000K

ITEM CODE CONFIGURATION

Sample Item Code **R 0 7 b 3 6 6 0 H 3 0 N 2 B F N A**
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩



- ① **Types**

 - R - Future Deco Thin Frame
- ② **Styles**

 - 07 - Double Short Side Inset Frost
- ③ **Lighting Styles**

 - d - Direct Light
 - b - Direct & Indirect Light
- ④ **Standard Sizes**

 - 2436-24"x36"
 - 2448-24"x48"
 - 3042-30"x42"
 - 3048-30"x48"
 - 3060-30"x60"
 - 3648-36"x48"
 - 3660-36"x60"
 - 3672-36"x72"
 - 4254-42"x54"
 - 4284-42"x84"
 - Custom (Ex: 3173-31.4"x72.5")
(Specify the accurate size in additional custom specification notes)
- ⑤ **Outputs**

 - S - Standard Output
(550 lumens/ft; 4.5 watts/ft)
 - H - High Output
(750 lumens/ft; 6 watts/ft)
- ⑥ **LED CCT** (All CRI 90+)

 - 27 - 2700k
 - 30 - 3000k
 - 35 - 3500k
 - 40 - 4000k
 - 50 - 5000k
 - 00 - Color Switchable
(Only available with high output with touch sensor & CCT Sync accessory)
- ⑦ **Drivers**

 - V - 100-277VAC 0-10 Dimmable
 - E - 100-277VAC ELV Dimmable
 - N - 100-277VAC Non Dimming
(Mirrors with touch sensors have to use a non-dimming driver)
- ⑧ **Mounting**

 - 1 - Vertical
 - 2 - Horizontal
- ⑨ **Frame Colors**


 - BF - Black Frame
 - SF - Silver Frame
 - GF - Gold Frame
 - WF - White Frame
 - BR - Bronze Frame
 - CF - Custom Frame
(Specify color on website)
- ⑩ **Accessories**

 - NA - None
 - TS - Touch Sensor
 - NL - Night Light
 - AF - Anti-Fog
 - CT - CCT Sync
 - AN - Anti-Fog & Night Light
 - AT - Anti-Fog & Touch Sensor
 - AL - Anti-Fog, Night Light, Touch Sensor
 - NT - Night Light & Touch Sensor
 - CN - CCT Sync & Night Light
 - CF - CCT Sync & Anti-Fog
 - CL - CCT Sync, Night Light, Anti-Fog
- Additional Custom Specification**

 - Low-Iron Glasses
 - Antimicrobial Powder Coat
 - Powder Coated Chassis
 - Custom Inset & Frosting Sizes (Up to 2")



R 08 i

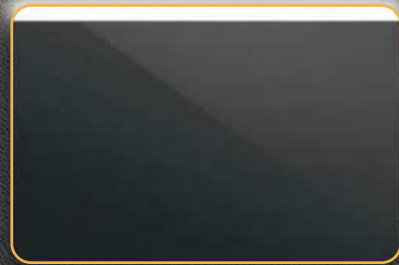

2700K 3000K 3500K 4000K 5000K 6000K

ITEM CODE CONFIGURATION

Sample Item Code **R 0 8 d 3 0 4 2 H 3 0 N 2 B F N A**
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩



- ① **Types**

 - R - Future Deco Thin Frame
- ② **Styles**

 - 08 - Single Long Side Edge Frost
- ③ **Lighting Styles**

 - i - Indirect Light
- ④ **Standard Sizes**

 - 2436-24"x36"
 - 2448-24"x48"
 - 3042-30"x42"
 - 3048-30"x48"
 - 3060-30"x60"
 - 3648-36"x48"
 - 3660-36"x60"
 - 3672-36"x72"
 - 4254-42"x54"
 - 4284-42"x84"
 - Custom (Ex: 3173-31.4"x72.5")
(Specify the accurate size in additional custom specification notes)
- ⑤ **Outputs**

 - S - Standard Output
(550 lumens/ft; 4.5 watts/ft)
 - H - High Output
(750 lumens/ft; 6 watts/ft)
- ⑥ **LED CCT** (All CRI 90+)

 - 27 - 2700k
 - 30 - 3000k
 - 35 - 3500k
 - 40 - 4000k
 - 50 - 5000k
 - 00 - Color Switchable
(Only available with high output with touch sensor & CCT Sync accessory)
- ⑦ **Drivers**

 - V - 100-277VAC 0-10 Dimmable
 - E - 100-277VAC ELV Dimmable
 - N - 100-277VAC Non Dimming
(Mirrors with touch sensors have to use a non-dimming driver)
- ⑧ **Mounting**

 - 1 - Vertical
 - 2 - Horizontal
- ⑨ **Frame Colors**

 - BF - Black Frame
 - SF - Silver Frame
 - GF - Gold Frame
 - WF - White Frame
 - BR - Bronze Frame
 - CF - Custom Frame
(Specify color on website)
- ⑩ **Accessories**

 - NA - None
 - TS - Touch Sensor
 - NL - Night Light
 - AF - Anti-Fog
 - CT - CCT Sync
 - AN - Anti-Fog & Night Light
 - AT - Anti-Fog & Touch Sensor
 - AL - Anti-Fog, Night Light, Touch Sensor
 - NT - Night Light & Touch Sensor
 - CN - CCT Sync & Night Light
 - CF - CCT Sync & Anti-Fog
 - CL - CCT Sync, Night Light, Anti-Fog
- Additional Custom Specification**


 - Low-Iron Glasses
 - Antimicrobial Powder Coat
 - Powder Coated Chassis
 - Custom Inset & Frosting Sizes (Up to 2")



R09b



R09d

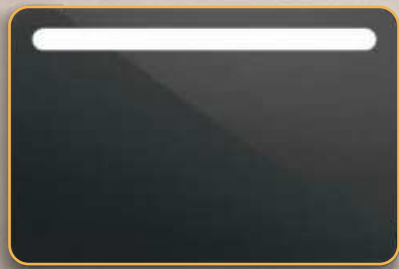

2700K 3000K 3500K 4000K 5000K 6000K

ITEM CODE CONFIGURATION

Sample Item Code **R09d3042S30N2BFNA**
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩



- ① **Types**

 - R - Future Deco Thin Frame
- ② **Styles**

 - 09 - Single Long Side Inset Frost
- ③ **Lighting Styles**

 - d - Direct Light
 - b - Direct & Indirect Light
- ④ **Standard Sizes**

 - 2436-24"x36"
 - 2448-24"x48"
 - 3042-30"x42"
 - 3048-30"x48"
 - 3060-30"x60"
 - 3648-36"x48"
 - 3660-36"x60"
 - 3672-36"x72"
 - 4254-42"x54"
 - 4284-42"x84"
 - Custom (Ex: 3173-31.4"x72.5")
(Specify the accurate size in additional custom specification notes)
- ⑤ **Outputs**

 - S - Standard Output
(550 lumens/ft; 4.5 watts/ft)
 - H - High Output
(750 lumens/ft; 6 watts/ft)
- ⑥ **LED CCT** (All CRI 90+)

 - 27 - 2700k
 - 30 - 3000k
 - 35 - 3500k
 - 40 - 4000k
 - 50 - 5000k
 - 00 - Color Switchable
(Only available with high output with touch sensor & CCT Sync accessory)
- ⑦ **Drivers**

 - V - 100-277VAC 0-10 Dimmable
 - E - 100-277VAC ELV Dimmable
 - N - 100-277VAC Non Dimming
(Mirrors with touch sensors have to use a non-dimming driver)
- ⑧ **Mounting**

 - 1 - Vertical
 - 2 - Horizontal
- ⑨ **Frame Colors**


 - BF - Black Frame
 - SF - Silver Frame
 - GF - Gold Frame
 - WF - White Frame
 - BR - Bronze Frame
 - CF - Custom Frame
(Specify color on website)
- ⑩ **Accessories**

 - NA - None
 - TS - Touch Sensor
 - NL - Night Light
 - AF - Anti-Fog
 - CT - CCT Sync
 - AN - Anti-Fog & Night Light
 - AT - Anti-Fog & Touch Sensor
 - AL - Anti-Fog, Night Light, Touch Sensor
 - NT - Night Light & Touch Sensor
 - CN - CCT Sync & Night Light
 - CF - CCT Sync & Anti-Fog
 - CL - CCT Sync, Night Light, Anti-Fog
- Additional Custom Specification**

 - Low-Iron Glasses
 - Antimicrobial Powder Coat
 - Powder Coated Chassis
 - Custom Inset & Frosting Sizes (Up to 2")



R10i



2700K 3000K 3500K 4000K 5000K 6000K

ITEM CODE CONFIGURATION

Sample Item Code **R10i2436S30N1GFNA**
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩



- ① **Types**

 - R - Future Deco Thin Frame
- ② **Styles**

 - 10 - Single Short Side Edge Frost
- ③ **Lighting Styles**

 - i - Indirect Light
- ④ **Standard Sizes**

 - 2436-24"x36"
 - 2448-24"x48"
 - 3042-30"x42"
 - 3048-30"x48"
 - 3060-30"x60"
 - 3648-36"x48"
 - 3660-36"x60"
 - 3672-36"x72"
 - 4254-42"x54"
 - 4284-42"x84"
 - Custom (Ex: 3173-31.4"x72.5")
(Specify the accurate size in additional custom specification notes)
- ⑤ **Outputs**

 - S - Standard Output
(550 lumens/ft; 4.5 watts/ft)
 - H - High Output
(750 lumens/ft; 6 watts/ft)
- ⑥ **LED CCT** (All CRI 90+)

 - 27 - 2700k
 - 30 - 3000k
 - 35 - 3500k
 - 40 - 4000k
 - 50 - 5000k
 - 00 - Color Switchable
(Only available with high output with touch sensor & CCT Sync accessory)
- ⑦ **Drivers**

 - V - 100-277VAC 0-10 Dimmable
 - E - 100-277VAC ELV Dimmable
 - N - 100-277VAC Non Dimming
(Mirrors with touch sensors have to use a non-dimming driver)
- ⑧ **Mounting**

 - 1 - Vertical
 - 2 - Horizontal
- ⑨ **Frame Colors**

 - BF - Black Frame
 - SF - Silver Frame
 - GF - Gold Frame
 - WF - White Frame
 - BR - Bronze Frame
 - CF - Custom Frame
(Specify color on website)
- ⑩ **Accessories**

 - NA - None
 - TS - Touch Sensor
 - NL - Night Light
 - AF - Anti-Fog
 - CT - CCT Sync
 - AN - Anti-Fog & Night Light
 - AT - Anti-Fog & Touch Sensor
 - AL - Anti-Fog, Night Light, Touch Sensor
 - NT - Night Light & Touch Sensor
 - CN - CCT Sync & Night Light
 - CF - CCT Sync & Anti-Fog
 - CL - CCT Sync, Night Light, Anti-Fog
- Additional Custom Specification**

 - Low-Iron Glasses
 - Antimicrobial Powder Coat
 - Powder Coated Chassis
 - Custom Inset & Frosting Sizes (Up to 2")



R02i3648H30N1BFNA

R11b



R11d



2700K 3000K 3500K 4000K 5000K 6000K

ITEM CODE CONFIGURATION

Sample Item Code **R 1 1 b 3 0 4 2 H 3 0 E 1 S F N A**
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩



- ① **Types**

 - R - Future Deco Thin Frame
- ② **Styles**

 - 11 - Single Short Side Inset Frost
- ③ **Lighting Styles**

 - d - Direct Light
 - b - Direct & Indirect Light
- ④ **Standard Sizes**

 - 2436-24"x36"
 - 2448-24"x48"
 - 3042-30"x42"
 - 3048-30"x48"
 - 3060-30"x60"
 - 3648-36"x48"
 - 3660-36"x60"
 - 3672-36"x72"
 - 4254-42"x54"
 - 4284-42"x84"
 - Custom (Ex: 3173-31.4"x72.5")
(Specify the accurate size in additional custom specification notes)
- ⑤ **Outputs**

 - S - Standard Output
(550 lumens/ft; 4.5 watts/ft)
 - H - High Output
(750 lumens/ft; 6 watts/ft)
- ⑥ **LED CCT** (All CRI 90+)

 - 27 - 2700k
 - 30 - 3000k
 - 35 - 3500k
 - 40 - 4000k
 - 50 - 5000k
 - 00 - Color Switchable
(Only available with high output with touch sensor & CCT Sync accessory)
- ⑦ **Drivers**

 - V - 100-277VAC 0-10 Dimmable
 - E - 100-277VAC ELV Dimmable
 - N - 100-277VAC Non Dimming
(Mirrors with touch sensors have to use a non-dimming driver)
- ⑧ **Mounting**

 - 1 - Vertical
 - 2 - Horizontal
- ⑨ **Frame Colors**

 - BF - Black Frame
 - SF - Silver Frame
 - GF - Gold Frame
 - WF - White Frame
 - BR - Bronze Frame
 - CF - Custom Frame
(Specify color on website)
- ⑩ **Accessories**

 - NA - None
 - TS - Touch Sensor
 - NL - Night Light
 - AF - Anti-Fog
 - CT - CCT Sync
 - AN - Anti-Fog & Night Light
 - AT - Anti-Fog & Touch Sensor
 - AL - Anti-Fog, Night Light, Touch Sensor
 - NT - Night Light & Touch Sensor
 - CN - CCT Sync & Night Light
 - CF - CCT Sync & Anti-Fog
 - CL - CCT Sync, Night Light, Anti-Fog

Additional Custom Specification

- Low-Iron Glasses
- Antimicrobial Powder Coat
- Powder Coated Chassis
- Custom Inset & Frosting Sizes (Up to 2")









DECO LINE.

Thin Frame

Color Availability:

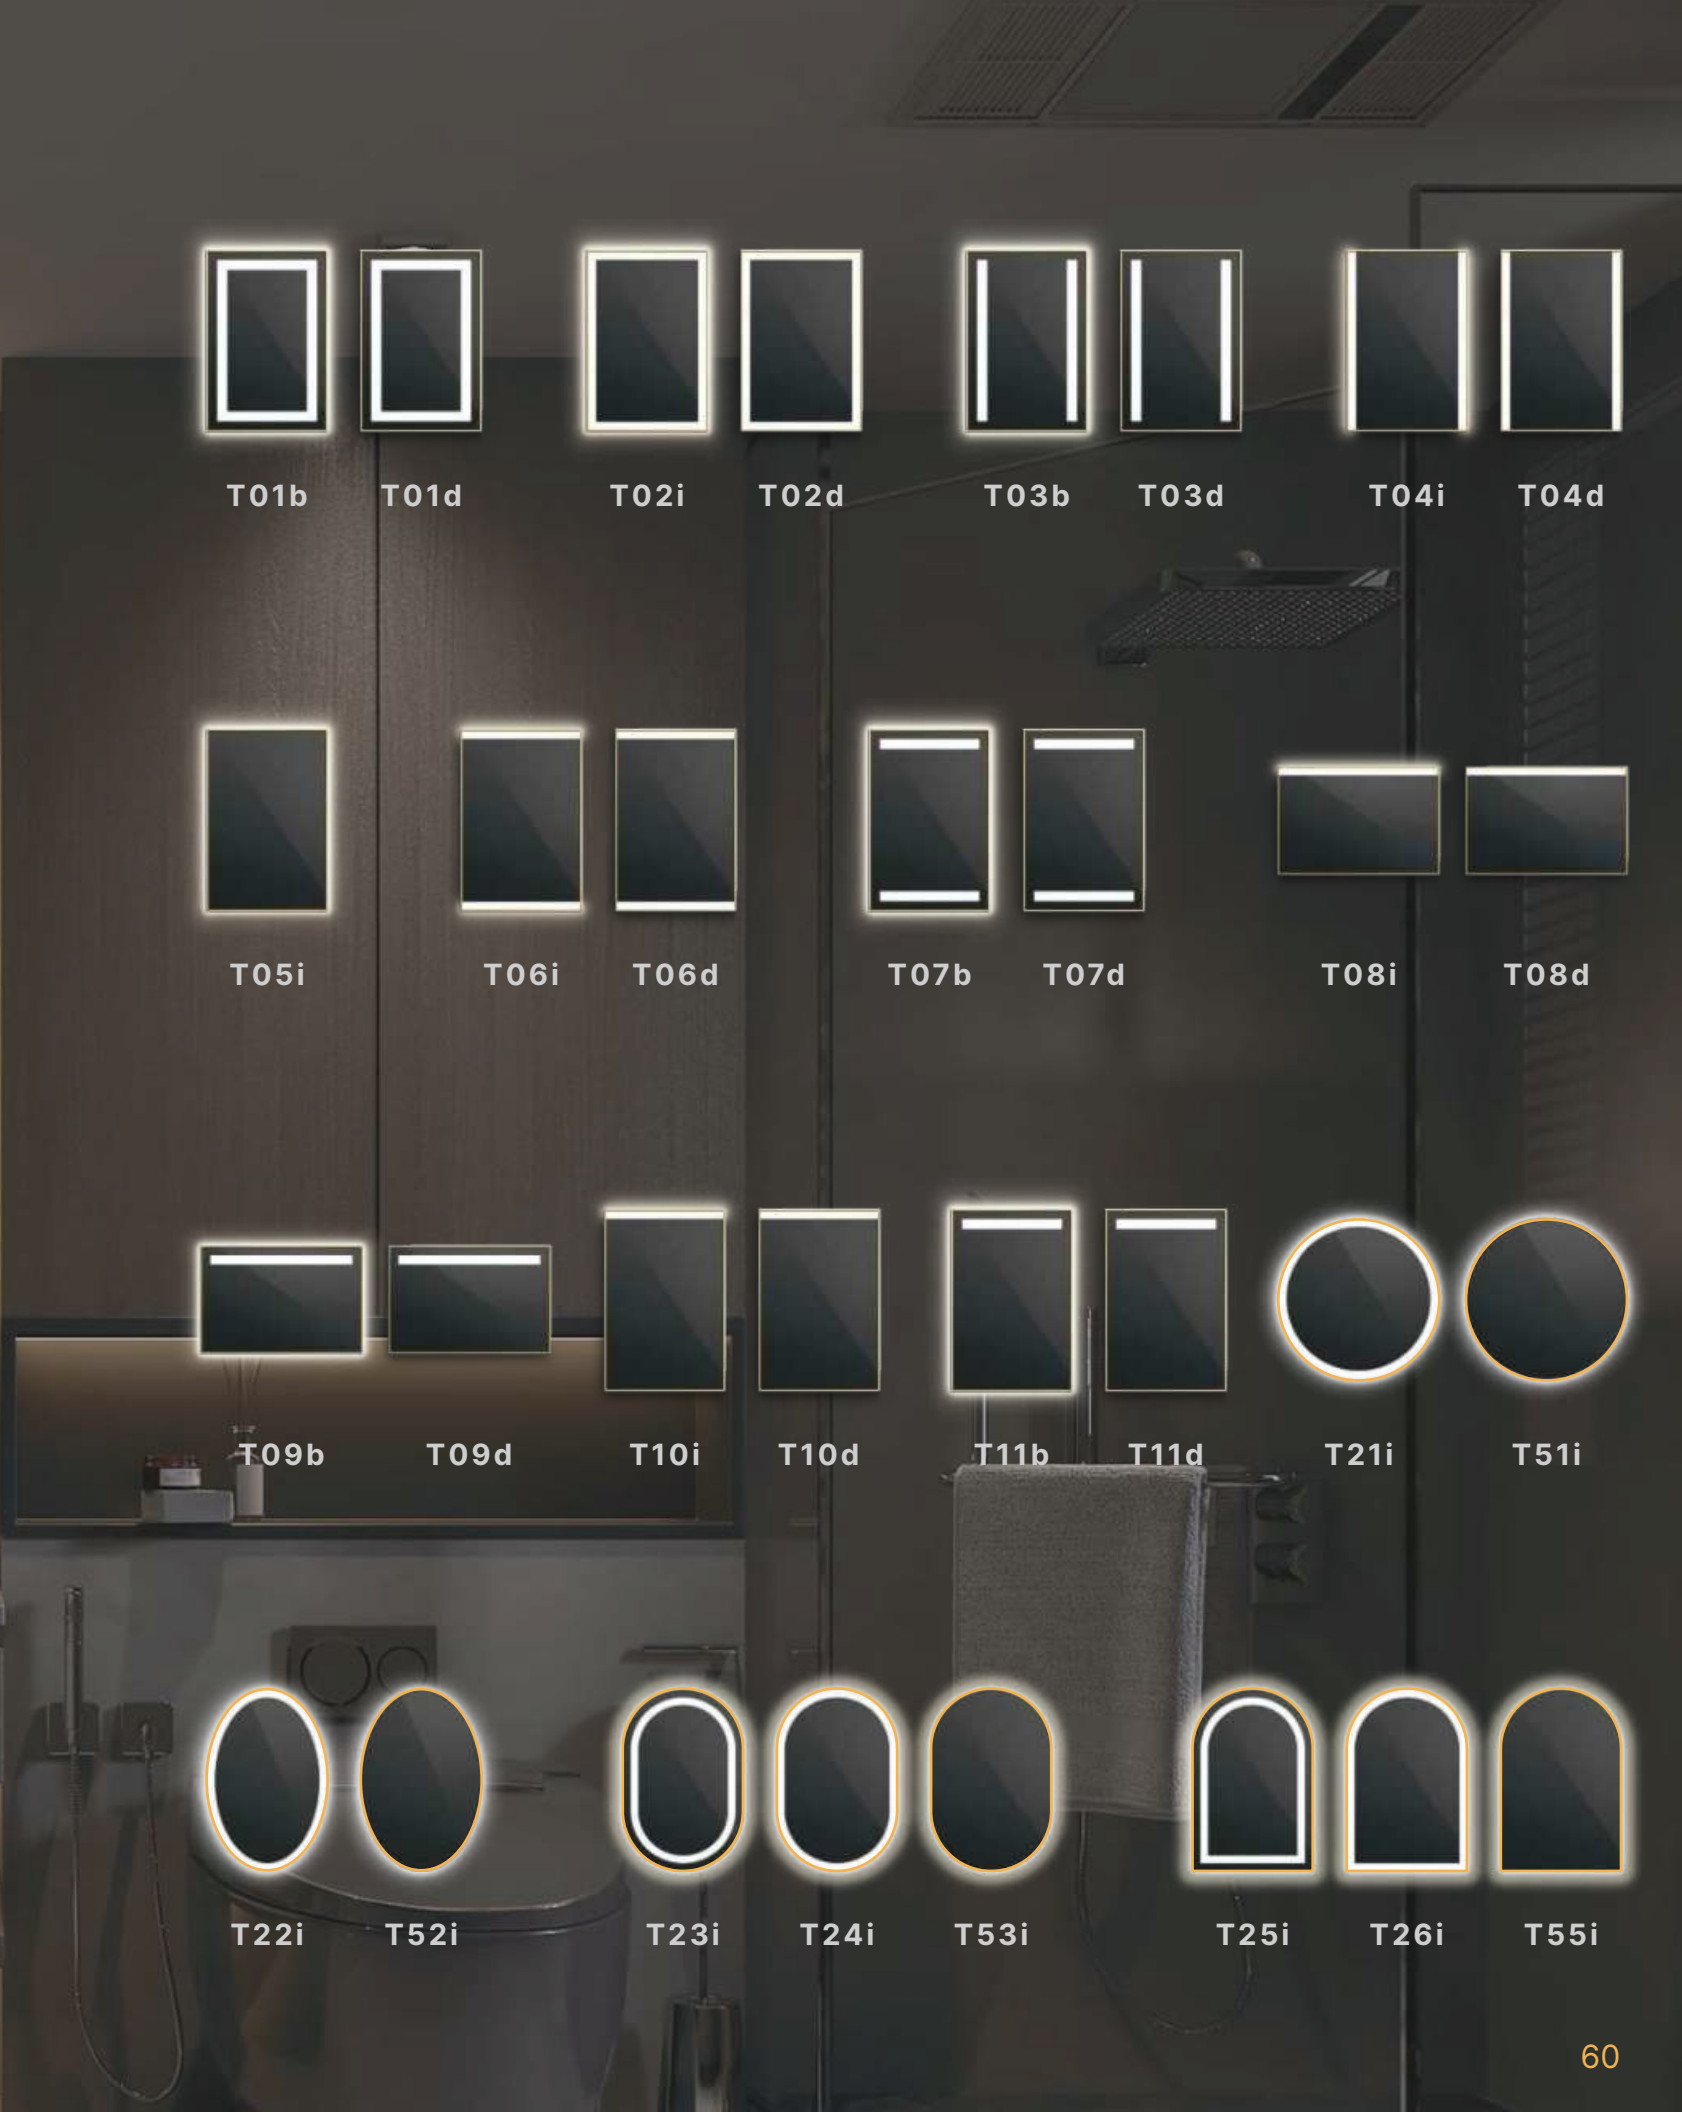



ITEM CODE CONFIGURATION

Sample Item Code T 0 1 b 2 4 7 0 H 3 0 N 1 BF NA



- ① **Types**

 - T - Deco Line Thin Frame
- ② **Styles**

 - 01 - Full Frame Inset Frost
- ③ **Lighting Styles**

 - d - Direct Light
 - b - Direct & Indirect Light
- ④ **Standard Sizes**

 - 2436-24"x36"
 - 2448-24"x48"
 - 3042-30"x42"
 - 3048-30"x48"
 - 3060-30"x60"
 - 3648-36"x48"
 - 3660-36"x60"
 - 3672-36"x72"
 - 4254-42"x54"
 - 4284-42"x84"
 - Custom (Ex: 3173-31.4"x72.5")
(Specify the accurate size in additional custom specification notes)
- ⑤ **Outputs**

 - S - Standard Output
(550 lumens/ft; 4.5 watts/ft)
 - H - High Output
(750 lumens/ft; 6 watts/ft)
- ⑥ **LED CCT** (All CRI 90+)

 - 27 - 2700k
 - 30 - 3000k
 - 35 - 3500k
 - 40 - 4000k
 - 50 - 5000k
 - 00 - Color Switchable
(Only available with high output with touch sensor & CCT Sync accessory)
- ⑦ **Drivers**

 - V - 100-277VAC 0-10 Dimmable
 - E - 100-277VAC ELV Dimmable
 - N - 100-277VAC Non Dimming
(Mirrors with touch sensors have to use a non-dimming driver)
- ⑧ **Mounting**

 - 1 - Vertical
 - 2 - Horizontal
- ⑨ **Frame Colors**

 - BF - Black Frame
 - SF - Silver Frame
 - GF - Gold Frame
 - WF - White Frame
 - BR - Bronze Frame
 - CF - Custom Frame
(Specify color on website)
- ⑩ **Accessories**

 - NA - None
 - TS - Touch Sensor
 - NL - Night Light
 - AF - Anti-Fog
 - CT - CCT Sync
 - AN - Anti-Fog & Night Light
 - AT - Anti-Fog & Touch Sensor
 - AL - Anti-Fog, Night Light, Touch Sensor
 - NT - Night Light & Touch Sensor
 - CN - CCT Sync & Night Light
 - CF - CCT Sync & Anti-Fog
 - CL - CCT Sync, Night Light, Anti-Fog
- Additional Custom Specification**

 - Low-Iron Glasses
 - Antimicrobial Powder Coat
 - Powder Coated Chassis
 - Custom Inset & Frosting Sizes (Up to 2")

ITEM CODE CONFIGURATION

Sample Item Code T 0 2 i 3 0 5 0 H 4 0 N 1 BF NA



- ① **Types**

 - T - Deco Line Thin Frame
- ② **Styles**

 - 02 - Full Frame Edge Frost
- ③ **Lighting Styles**

 - d - Direct Light
 - i - Indirect Light
- ④ **Standard Sizes**

 - 2436-24"x36"
 - 2448-24"x48"
 - 3042-30"x42"
 - 3048-30"x48"
 - 3060-30"x60"
 - 3648-36"x48"
 - 3660-36"x60"
 - 3672-36"x72"
 - 4254-42"x54"
 - 4284-42"x84"
 - Custom (Ex: 3173-31.4"x72.5")
(Specify the accurate size in additional custom specification notes)
- ⑤ **Outputs**

 - S - Standard Output
(550 lumens/ft; 4.5 watts/ft)
 - H - High Output
(750 lumens/ft; 6 watts/ft)
- ⑥ **LED CCT** (All CRI 90+)

 - 27 - 2700k
 - 30 - 3000k
 - 35 - 3500k
 - 40 - 4000k
 - 50 - 5000k
 - 00 - Color Switchable
(Only available with high output with touch sensor & CCT Sync accessory)
- ⑦ **Drivers**

 - V - 100-277VAC 0-10 Dimmable
 - E - 100-277VAC ELV Dimmable
 - N - 100-277VAC Non Dimming
(Mirrors with touch sensors have to use a non-dimming driver)
- ⑧ **Mounting**

 - 1 - Vertical
 - 2 - Horizontal
- ⑨ **Frame Colors**

 - BF - Black Frame
 - SF - Silver Frame
 - GF - Gold Frame
 - WF - White Frame
 - BR - Bronze Frame
 - CF - Custom Frame
(Specify color on website)
- ⑩ **Accessories**

 - NA - None
 - TS - Touch Sensor
 - NL - Night Light
 - AF - Anti-Fog
 - CT - CCT Sync
 - AN - Anti-Fog & Night Light
 - AT - Anti-Fog & Touch Sensor
 - AL - Anti-Fog, Night Light, Touch Sensor
 - NT - Night Light & Touch Sensor
 - CN - CCT Sync & Night Light
 - CF - CCT Sync & Anti-Fog
 - CL - CCT Sync, Night Light, Anti-Fog
- Additional Custom Specification**

 - Low-Iron Glasses
 - Antimicrobial Powder Coat
 - Powder Coated Chassis
 - Custom Inset & Frosting Sizes (Up to 2")



T 0 4 d



2700K 3000K 3500K 4000K 5000K 6000K

ITEM CODE CONFIGURATION

Sample Item Code **T 0 4 i 2 4 7 0 S 3 0 N 1 G F N A**
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩



③ Lighting Styles

- d - Direct Light
- i - Indirect Light

⑤ Outputs

- S - Standard Output
(550 lumens/ft; 4.5 watts/ft)
- H - High Output
(750 lumens/ft; 6 watts/ft)

⑧ Mounting

- 1 - Vertical
- 2 - Horizontal

⑩ Accessories

- NA - None
- TS - Touch Sensor
- NL - Night Light
- AF - Anti-Fog
- CT - CCT Sync
- AN - Anti-Fog & Night Light
- AT - Anti-Fog & Touch Sensor
- AL - Anti-Fog, Night Light, Touch Sensor
- NT - Night Light & Touch Sensor
- CN - CCT Sync & Night Light
- CF - CCT Sync & Anti-Fog
- CL - CCT Sync, Night Light, Anti-Fog

Additional Custom Specification

- Low-Iron Glasses
- Antimicrobial Powder Coat
- Powder Coated Chassis
- Custom Inset & Frosting Sizes (Up to 2")



T05i



T06i



T06d



2700K 3000K 3500K 4000K 5000K 6000K 2700K 3000K 3500K 4000K 5000K 6000K

ITEM CODE CONFIGURATION

Sample Item Code T05i3072H00N2BFTS



- ① Types

 - T - Deco Line Thin Frame
- ② Styles

 - 05 - No Frost, All Sides Illumination
- ③ Lighting Styles

 - i - Indirect Light
- ④ Standard Sizes

 - 2436-24"x36"
 - 2448-24"x48"
 - 3042-30"x42"
 - 3048-30"x48"
 - 3060-30"x60"
 - 3648-36"x48"
 - 3660-36"x60"
 - 3672-36"x72"
 - 4254-42"x54"
 - 4284-42"x84"
 - Custom (Ex: 3173-31.4"x72.5") (Specify the accurate size in additional custom specification notes)
- ⑤ Outputs

 - S - Standard Output (550 lumens/ft; 4.5 watts/ft)
 - H - High Output (750 lumens/ft; 6 watts/ft)
- ⑥ LED CCT (All CRI 90+)

 - 27 - 2700k
 - 30 - 3000k
 - 35 - 3500k
 - 40 - 4000k
 - 50 - 5000k
 - 00 - Color Switchable (Only available with high output with touch sensor & CCT Sync accessory)
- ⑦ Drivers

 - V - 100-277VAC 0-10 Dimmable
 - E - 100-277VAC ELV Dimmable
 - N - 100-277VAC Non Dimming (Mirrors with touch sensors have to use a non-dimming driver)
- ⑧ Mounting

 - 1 - Vertical
 - 2 - Horizontal
- ⑨ Frame Colors

 - BF - Black Frame
 - SF - Silver Frame
 - GF - Gold Frame
 - WF - White Frame
 - BR - Bronze Frame
 - CF - Custom Frame (Specify color on website)
- ⑩ Accessories

 - NA - None
 - TS - Touch Sensor
 - NL - Night Light
 - AF - Anti-Fog
 - CT - CCT Sync
 - AN - Anti-Fog & Night Light
 - AT - Anti-Fog & Touch Sensor
 - AL - Anti-Fog, Night Light, Touch Sensor
 - NT - Night Light & Touch Sensor
 - CN - CCT Sync & Night Light
 - CF - CCT Sync & Anti-Fog
 - CL - CCT Sync, Night Light, Anti-Fog
- Additional Custom Specification

 - Low-Iron Glasses
 - Antimicrobial Powder Coat
 - Powder Coated Chassis
 - Custom Inset & Frosting Sizes (Up to 2")

ITEM CODE CONFIGURATION

Sample Item Code T06i3240H40N1SFNA



- ① Types

 - T - Deco Line Thin Frame
- ② Styles

 - 06 - Double Short Side Edge Frost
- ③ Lighting Styles

 - d - Direct Light
 - i - Indirect Light
- ④ Standard Sizes

 - 2436-24"x36"
 - 2448-24"x48"
 - 3042-30"x42"
 - 3048-30"x48"
 - 3060-30"x60"
 - 3648-36"x48"
 - 3660-36"x60"
 - 3672-36"x72"
 - 4254-42"x54"
 - 4284-42"x84"
 - Custom (Ex: 3173-31.4"x72.5") (Specify the accurate size in additional custom specification notes)
- ⑤ Outputs

 - S - Standard Output (550 lumens/ft; 4.5 watts/ft)
 - H - High Output (750 lumens/ft; 6 watts/ft)
- ⑥ LED CCT (All CRI 90+)

 - 27 - 2700k
 - 30 - 3000k
 - 35 - 3500k
 - 40 - 4000k
 - 50 - 5000k
 - 00 - Color Switchable (Only available with high output with touch sensor & CCT Sync accessory)
- ⑦ Drivers

 - V - 100-277VAC 0-10 Dimmable
 - E - 100-277VAC ELV Dimmable
 - N - 100-277VAC Non Dimming (Mirrors with touch sensors have to use a non-dimming driver)
- ⑧ Mounting

 - 1 - Vertical
 - 2 - Horizontal
- ⑨ Frame Colors

 - BF - Black Frame
 - SF - Silver Frame
 - GF - Gold Frame
 - WF - White Frame
 - BR - Bronze Frame
 - CF - Custom Frame (Specify color on website)
- ⑩ Accessories

 - NA - None
 - TS - Touch Sensor
 - NL - Night Light
 - AF - Anti-Fog
 - CT - CCT Sync
 - AN - Anti-Fog & Night Light
 - AT - Anti-Fog & Touch Sensor
 - AL - Anti-Fog, Night Light, Touch Sensor
 - NT - Night Light & Touch Sensor
 - CN - CCT Sync & Night Light
 - CF - CCT Sync & Anti-Fog
 - CL - CCT Sync, Night Light, Anti-Fog
- Additional Custom Specification

 - Low-Iron Glasses
 - Antimicrobial Powder Coat
 - Powder Coated Chassis
 - Custom Inset & Frosting Sizes (Up to 2")




T 07 b



T 07 d



T 08 i

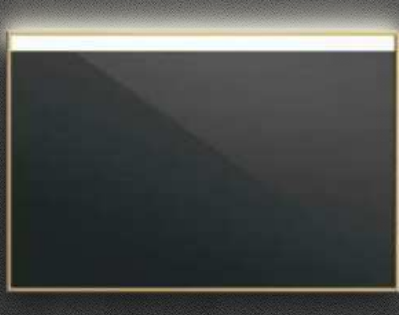

T 08 d



2700K 3000K 3500K 4000K 5000K 6000K

2700K 3000K 3500K 4000K 5000K 6000K

ITEM CODE CONFIGURATION

Sample Item Code T 0 7 b 2 4 4 8 H 0 0 N 1 B F N A



- ① Types

 - T - Deco Line Thin Frame
- ② Styles

 - 07 - Double Short Side Inset Frost
- ③ Lighting Styles

 - d - Direct Light
 - b - Direct & Indirect Light
- ④ Standard Sizes

 - 2436-24"x36"
 - 2448-24"x48"
 - 3042-30"x42"
 - 3048-30"x48"
 - 3060-30"x60"
 - 3648-36"x48"
 - 3660-36"x60"
 - 3672-36"x72"
 - 4254-42"x54"
 - 4284-42"x84"
 - Custom (Ex: 3173-31.4"x72.5") (Specify the accurate size in additional custom specification notes)
- ⑤ Outputs

 - S - Standard Output (550 lumens/ft; 4.5 watts/ft)
 - H - High Output (750 lumens/ft; 6 watts/ft)
- ⑥ LED CCT (All CRI 90+)

 - 27 - 2700k
 - 30 - 3000k
 - 35 - 3500k
 - 40 - 4000k
 - 50 - 5000k
 - 00 - Color Switchable (Only available with high output with touch sensor & CCT Sync accessory)
- ⑦ Drivers

 - V - 100-277VAC 0-10 Dimmable
 - E - 100-277VAC ELV Dimmable
 - N - 100-277VAC Non Dimming (Mirrors with touch sensors have to use a non-dimming driver)
- ⑧ Mounting

 - 1 - Vertical
 - 2 - Horizontal
- ⑨ Frame Colors

 - BF - Black Frame
 - SF - Silver Frame
 - GF - Gold Frame
 - WF - White Frame
 - BR - Bronze Frame
 - CF - Custom Frame (Specify color on website)
- ⑩ Accessories

 - NA - None
 - TS - Touch Sensor
 - NL - Night Light
 - AF - Anti-Fog
 - CT - CCT Sync
 - AN - Anti-Fog & Night Light
 - AT - Anti-Fog & Touch Sensor
 - AL - Anti-Fog, Night Light, Touch Sensor
 - NT - Night Light & Touch Sensor
 - CN - CCT Sync & Night Light
 - CF - CCT Sync & Anti-Fog
 - CL - CCT Sync, Night Light, Anti-Fog

Additional Custom Specification

- Low-Iron Glasses
- Antimicrobial Powder Coat
- Powder Coated Chassis
- Custom Inset & Frosting Sizes (Up to 2")

ITEM CODE CONFIGURATION

Sample Item Code T 0 8 i 3 0 4 8 H 4 0 N 2 B F N A



- ① Types

 - T - Deco Line Thin Frame
- ② Styles

 - 08 - Single Long Side Edge Frost
- ③ Lighting Styles

 - d - Direct Light
 - i - Indirect Light
- ④ Standard Sizes

 - 2436-24"x36"
 - 2448-24"x48"
 - 3042-30"x42"
 - 3048-30"x48"
 - 3060-30"x60"
 - 3648-36"x48"
 - 3660-36"x60"
 - 3672-36"x72"
 - 4254-42"x54"
 - 4284-42"x84"
 - Custom (Ex: 3173-31.4"x72.5") (Specify the accurate size in additional custom specification notes)
- ⑤ Outputs

 - S - Standard Output (550 lumens/ft; 4.5 watts/ft)
 - H - High Output (750 lumens/ft; 6 watts/ft)
- ⑥ LED CCT (All CRI 90+)

 - 27 - 2700k
 - 30 - 3000k
 - 35 - 3500k
 - 40 - 4000k
 - 50 - 5000k
 - 00 - Color Switchable (Only available with high output with touch sensor & CCT Sync accessory)
- ⑦ Drivers

 - V - 100-277VAC 0-10 Dimmable
 - E - 100-277VAC ELV Dimmable
 - N - 100-277VAC Non Dimming (Mirrors with touch sensors have to use a non-dimming driver)
- ⑧ Mounting

 - 1 - Vertical
 - 2 - Horizontal
- ⑨ Frame Colors

 - BF - Black Frame
 - SF - Silver Frame
 - GF - Gold Frame
 - WF - White Frame
 - BR - Bronze Frame
 - CF - Custom Frame (Specify color on website)
- ⑩ Accessories

 - NA - None
 - TS - Touch Sensor
 - NL - Night Light
 - AF - Anti-Fog
 - CT - CCT Sync
 - AN - Anti-Fog & Night Light
 - AT - Anti-Fog & Touch Sensor
 - AL - Anti-Fog, Night Light, Touch Sensor
 - NT - Night Light & Touch Sensor
 - CN - CCT Sync & Night Light
 - CF - CCT Sync & Anti-Fog
 - CL - CCT Sync, Night Light, Anti-Fog

Additional Custom Specification

- Low-Iron Glasses
- Antimicrobial Powder Coat
- Powder Coated Chassis
- Custom Inset & Frosting Sizes (Up to 2")



ITEM CODE CONFIGURATION

Sample Item Code **T 0 9 d 4 2 9 8 S 3 0 N 2 B F N A**
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩



- ① **Types**
 - T - Deco Line Thin Frame
- ② **Styles**
 - 09 - Single Long Side Inset Frost
- ③ **Lighting Styles**
 - d - Direct Light
 - b - Direct & Indirect Light
- ④ **Standard Sizes**
 - 2436-24"x36"
 - 2448-24"x48"
 - 3042-30"x42"
 - 3048-30"x48"
 - 3060-30"x60"
 - 3648-36"x48"
 - 3660-36"x60"
 - 3672-36"x72"
 - 4254-42"x54"
 - 4284-42"x84"
 - Custom (Ex: 3173-31.4"x72.5")
(Specify the accurate size in additional custom specification notes)
- ⑤ **Outputs**
 - S - Standard Output
(550 lumens/ft; 4.5 watts/ft)
 - H - High Output
(750 lumens/ft; 6 watts/ft)
- ⑥ **LED CCT** (All CRI 90+)
 - 27 - 2700k
 - 30 - 3000k
 - 35 - 3500k
 - 40 - 4000k
 - 50 - 5000k
 - 00 - Color Switchable
(Only available with high output with touch sensor & CCT Sync accessory)
- ⑦ **Drivers**
 - V - 100-277VAC 0-10 Dimmable
 - E - 100-277VAC ELV Dimmable
 - N - 100-277VAC Non Dimming
(Mirrors with touch sensors have to use a non-dimming driver)
- ⑧ **Mounting**
 - 1 - Vertical
 - 2 - Horizontal
- ⑨ **Frame Colors**
 - BF - Black Frame
 - SF - Silver Frame
 - GF - Gold Frame
 - WF - White Frame
 - BR - Bronze Frame
 - CF - Custom Frame
(Specify color on website)
- ⑩ **Accessories**
 - NA - None
 - TS - Touch Sensor
 - NL - Night Light
 - AF - Anti-Fog
 - CT - CCT Sync
 - AN - Anti-Fog & Night Light
 - AT - Anti-Fog & Touch Sensor
 - AL - Anti-Fog, Night Light, Touch Sensor
 - NT - Night Light & Touch Sensor
 - CN - CCT Sync & Night Light
 - CF - CCT Sync & Anti-Fog
 - CL - CCT Sync, Night Light, Anti-Fog
- Additional Custom Specification**
 - Low-Iron Glasses
 - Antimicrobial Powder Coat
 - Powder Coated Chassis
 - Custom Inset & Frosting Sizes (Up to 2")

ITEM CODE CONFIGURATION

Sample Item Code **T 1 0 i 2 4 3 6 H 3 0 N 1 G F N A**
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩



- ① **Types**
 - T - Deco Line Thin Frame
- ② **Styles**
 - 10 - Single Short Side Edge Frost
- ③ **Lighting Styles**
 - d - Direct Light
 - i - Indirect Light
- ④ **Standard Sizes**
 - 2436-24"x36"
 - 2448-24"x48"
 - 3042-30"x42"
 - 3048-30"x48"
 - 3060-30"x60"
 - 3648-36"x48"
 - 3660-36"x60"
 - 3672-36"x72"
 - 4254-42"x54"
 - 4284-42"x84"
 - Custom (Ex: 3173-31.4"x72.5")
(Specify the accurate size in additional custom specification notes)
- ⑤ **Outputs**
 - S - Standard Output
(550 lumens/ft; 4.5 watts/ft)
 - H - High Output
(750 lumens/ft; 6 watts/ft)
- ⑥ **LED CCT** (All CRI 90+)
 - 27 - 2700k
 - 30 - 3000k
 - 35 - 3500k
 - 40 - 4000k
 - 50 - 5000k
 - 00 - Color Switchable
(Only available with high output with touch sensor & CCT Sync accessory)
- ⑦ **Drivers**
 - V - 100-277VAC 0-10 Dimmable
 - E - 100-277VAC ELV Dimmable
 - N - 100-277VAC Non Dimming
(Mirrors with touch sensors have to use a non-dimming driver)
- ⑧ **Mounting**
 - 1 - Vertical
 - 2 - Horizontal
- ⑨ **Frame Colors**
 - BF - Black Frame
 - SF - Silver Frame
 - GF - Gold Frame
 - WF - White Frame
 - BR - Bronze Frame
 - CF - Custom Frame
(Specify color on website)
- ⑩ **Accessories**
 - NA - None
 - TS - Touch Sensor
 - NL - Night Light
 - AF - Anti-Fog
 - CT - CCT Sync
 - AN - Anti-Fog & Night Light
 - AT - Anti-Fog & Touch Sensor
 - AL - Anti-Fog, Night Light, Touch Sensor
 - NT - Night Light & Touch Sensor
 - CN - CCT Sync & Night Light
 - CF - CCT Sync & Anti-Fog
 - CL - CCT Sync, Night Light, Anti-Fog
- Additional Custom Specification**
 - Low-Iron Glasses
 - Antimicrobial Powder Coat
 - Powder Coated Chassis
 - Custom Inset & Frosting Sizes (Up to 2")



T11b



T11d



2700K 3000K 3500K 4000K 5000K 6000K



T21i



2700K 3000K 3500K 4000K 5000K 6000K

ITEM CODE CONFIGURATION

Sample Item Code T 1 1 d 3 0 4 2 H 3 0 N 1 BF NA
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩



- ① **Types**

 - T - Deco Line Thin Frame
- ② **Styles**

 - 11 - Single Short Side Inset Frost
- ③ **Lighting Styles**

 - d - Direct Light
 - b - Direct & Indirect Light
- ④ **Standard Sizes**

 - 2436-24"x36"
 - 2448-24"x48"
 - 3042-30"x42"
 - 3048-30"x48"
 - 3060-30"x60"
 - 3648-36"x48"
 - 3660-36"x60"
 - 3672-36"x72"
 - 4254-42"x54"
 - 4284-42"x84"
 - Custom (Ex: 3173-31.4"x72.5")
(Specify the accurate size in additional custom specification notes)
- ⑤ **Outputs**

 - S - Standard Output
(550 lumens/ft; 4.5 watts/ft)
 - H - High Output
(750 lumens/ft; 6 watts/ft)
- ⑥ **LED CCT** (All CRI 90+)

 - 27 - 2700k
 - 30 - 3000k
 - 35 - 3500k
 - 40 - 4000k
 - 50 - 5000k
 - 00 - Color Switchable
(Only available with high output with touch sensor & CCT Sync accessory)
- ⑦ **Drivers**

 - V - 100-277VAC 0-10 Dimmable
 - E - 100-277VAC ELV Dimmable
 - N - 100-277VAC Non Dimming
(Mirrors with touch sensors have to use a non-dimming driver)
- ⑧ **Mounting**

 - 1 - Vertical
 - 2 - Horizontal
- ⑨ **Frame Colors**

 - BF - Black Frame
 - SF - Silver Frame
 - GF - Gold Frame
 - WF - White Frame
 - BR - Bronze Frame
 - CF - Custom Frame
(Specify color on website)
- ⑩ **Accessories**

 - NA - None
 - TS - Touch Sensor
 - NL - Night Light
 - AF - Anti-Fog
 - CT - CCT Sync
 - AN - Anti-Fog & Night Light
 - AT - Anti-Fog & Touch Sensor
 - AL - Anti-Fog, Night Light, Touch Sensor
 - NT - Night Light & Touch Sensor
 - CN - CCT Sync & Night Light
 - CF - CCT Sync & Anti-Fog
 - CL - CCT Sync, Night Light, Anti-Fog

Additional Custom Specification

- Low-Iron Glasses
- Antimicrobial Powder Coat
- Powder Coated Chassis
- Custom Inset & Frosting Sizes (Up to 2")

ITEM CODE CONFIGURATION

Sample Item Code T 2 1 i 0 0 3 2 S 3 0 N 1 BF NA
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩



- ① **Types**

 - T - Deco Line Thin Frame
- ② **Styles**

 - 21 - Circle Full Frame Edge Frost
- ③ **Lighting Styles**

 - i - Indirect Light
- ④ **Standard Sizes**

 - 0032 - 32"
 - 0036 - 36"
 - Custom (Ex: 0038 - 38.1")
(Specify the accurate size in additional custom specification notes)
- ⑤ **Outputs**

 - S - Standard Output
(550 lumens/ft; 4.5 watts/ft)
 - H - High Output
(750 lumens/ft; 6 watts/ft)
- ⑥ **LED CCT** (All CRI 90+)

 - 27 - 2700k
 - 30 - 3000k
 - 35 - 3500k
 - 40 - 4000k
 - 50 - 5000k
 - 00 - Color Switchable
(Only available with high output with touch sensor & CCT Sync accessory)
- ⑦ **Drivers**

 - V - 100-277VAC 0-10 Dimmable
 - E - 100-277VAC ELV Dimmable
 - N - 100-277VAC Non Dimming
(Mirrors with touch sensors have to use a non-dimming driver)
- ⑧ **Mounting**

 - 1 - Vertical
 - 2 - Horizontal
- ⑨ **Frame Colors**

 - BF - Black Frame
 - SF - Silver Frame
 - GF - Gold Frame
 - WF - White Frame
 - BR - Bronze Frame
 - CF - Custom Frame
(Specify color on website)
- ⑩ **Accessories**

 - NA - None
 - TS - Touch Sensor
 - NL - Night Light
 - AF - Anti-Fog
 - CT - CCT Sync
 - AN - Anti-Fog & Night Light
 - AT - Anti-Fog & Touch Sensor
 - AL - Anti-Fog, Night Light, Touch Sensor
 - NT - Night Light & Touch Sensor
 - CN - CCT Sync & Night Light
 - CF - CCT Sync & Anti-Fog
 - CL - CCT Sync, Night Light, Anti-Fog

Additional Custom Specification

- Low-Iron Glasses
- Antimicrobial Powder Coat
- Powder Coated Chassis
- Custom Inset & Frosting Sizes (Up to 2")



T 2 2 i

T 2 3 i



2700K	3000K	3500K	4000K	5000K	6000K	2700K	3000K	3500K	4000K	5000K	6000K
-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------

ITEM CODE CONFIGURATION

Sample Item Code T 2 2 i 2 4 3 6 S 3 0 N 1 B F N A
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩



- ① **Types**
 - T - Deco Line Thin Frame
- ② **Styles**
 - 22 - Oval Full Frame Edge Frost
- ③ **Lighting Styles**
 - i - Indirect Light
- ④ **Standard Sizes**
 - 2436-24"x36"
 - 2448-24"x48"
 - 3042-30"x42"
 - 3048-30"x48"
 - 3060-30"x60"
 - 3648-36"x48"
 - 3660-36"x60"
 - 3672-36"x72"
 - 4254-42"x54"
 - 4284-42"x84"
 - Custom (Ex: 3173-31.4"x72.5") (Specify the accurate size in additional custom specification notes)
- ⑤ **Outputs**
 - S - Standard Output (550 lumens/ft; 4.5 watts/ft)
 - H - High Output (750 lumens/ft; 6 watts/ft)
- ⑥ **LED CCT** (All CRI 90+)
 - 27 - 2700k
 - 30 - 3000k
 - 35 - 3500k
 - 40 - 4000k
 - 50 - 5000k
 - 00 - Color Switchable (Only available with high output with touch sensor & CCT Sync accessory)
- ⑦ **Drivers**
 - V - 100-277VAC 0-10 Dimmable
 - E - 100-277VAC ELV Dimmable
 - N - 100-277VAC Non Dimming (Mirrors with touch sensors have to use a non-dimming driver)
- ⑧ **Mounting**
 - 1 - Vertical
 - 2 - Horizontal
- ⑨ **Frame Colors**
 - BF - Black Frame
 - SF - Silver Frame
 - GF - Gold Frame
 - WF - White Frame
 - BR - Bronze Frame
 - CF - Custom Frame (Specify color on website)
- ⑩ **Accessories**
 - NA - None
 - TS - Touch Sensor
 - NL - Night Light
 - AF - Anti-Fog
 - CT - CCT Sync
 - AN - Anti-Fog & Night Light
 - AT - Anti-Fog & Touch Sensor
 - AL - Anti-Fog, Night Light, Touch Sensor
 - NT - Night Light & Touch Sensor
 - CN - CCT Sync & Night Light
 - CF - CCT Sync & Anti-Fog
 - CL - CCT Sync, Night Light, Anti-Fog

Additional Custom Specification

- Low-Iron Glasses
- Antimicrobial Powder Coat
- Powder Coated Chassis
- Custom Inset & Frosting Sizes (Up to 2")

ITEM CODE CONFIGURATION

Sample Item Code T 2 3 i 0 0 3 2 S 3 0 N 1 B F N A
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩



- ① **Types**
 - T - Deco Line Thin Frame
- ② **Styles**
 - 23 - Stadium Full Frame Inset Frost
- ③ **Lighting Styles**
 - i - Indirect Light
- ④ **Standard Sizes**
 - 2436-24"x36"
 - 2448-24"x48"
 - 3042-30"x42"
 - 3048-30"x48"
 - 3060-30"x60"
 - 3648-36"x48"
 - 3660-36"x60"
 - 3672-36"x72"
 - 4254-42"x54"
 - 4284-42"x84"
 - Custom (Ex: 3173-31.4"x72.5") (Specify the accurate size in additional custom specification notes)
- ⑤ **Outputs**
 - S - Standard Output (550 lumens/ft; 4.5 watts/ft)
 - H - High Output (750 lumens/ft; 6 watts/ft)
- ⑥ **LED CCT** (All CRI 90+)
 - 27 - 2700k
 - 30 - 3000k
 - 35 - 3500k
 - 40 - 4000k
 - 50 - 5000k
 - 00 - Color Switchable (Only available with high output with touch sensor & CCT Sync accessory)
- ⑦ **Drivers**
 - V - 100-277VAC 0-10 Dimmable
 - E - 100-277VAC ELV Dimmable
 - N - 100-277VAC Non Dimming (Mirrors with touch sensors have to use a non-dimming driver)
- ⑧ **Mounting**
 - 1 - Vertical
 - 2 - Horizontal
- ⑨ **Frame Colors**
 - BF - Black Frame
 - SF - Silver Frame
 - GF - Gold Frame
 - WF - White Frame
 - BR - Bronze Frame
 - CF - Custom Frame (Specify color on website)
- ⑩ **Accessories**
 - NA - None
 - TS - Touch Sensor
 - NL - Night Light
 - AF - Anti-Fog
 - CT - CCT Sync
 - AN - Anti-Fog & Night Light
 - AT - Anti-Fog & Touch Sensor
 - AL - Anti-Fog, Night Light, Touch Sensor
 - NT - Night Light & Touch Sensor
 - CN - CCT Sync & Night Light
 - CF - CCT Sync & Anti-Fog
 - CL - CCT Sync, Night Light, Anti-Fog

Additional Custom Specification

- Low-Iron Glasses
- Antimicrobial Powder Coat
- Powder Coated Chassis
- Custom Inset & Frosting Sizes (Up to 2")



T 2 4 i



2700K 3000K 3500K 4000K 5000K 6000K

ITEM CODE CONFIGURATION

Sample Item Code T 2 4 i 2 4 3 6 S 3 0 N 1 B F N A



- ① Types

 - T - Deco Line Thin Frame
- ② Styles

 - 24 - Stadium Full Frame Edge Frost
- ③ Lighting Styles

 - i - Indirect Light
- ④ Standard Sizes

 - 2436-24"x36"
 - 2448-24"x48"
 - 3042-30"x42"
 - 3048-30"x48"
 - 3060-30"x60"
 - 3648-36"x48"
 - 3660-36"x60"
 - 3672-36"x72"
 - 4254-42"x54"
 - 4284-42"x84"
 - Custom (Ex: 3173-31.4"x72.5") (Specify the accurate size in additional custom specification notes)
- ⑤ Outputs

 - S - Standard Output (550 lumens/ft; 4.5 watts/ft)
 - H - High Output (750 lumens/ft; 6 watts/ft)
- ⑥ LED CCT (All CRI 90+)

 - 27 - 2700k
 - 30 - 3000k
 - 35 - 3500k
 - 40 - 4000k
 - 50 - 5000k
 - 00 - Color Switchable (Only available with high output with touch sensor & CCT Sync accessory)
- ⑦ Drivers

 - V - 100-277VAC 0-10 Dimmable
 - E - 100-277VAC ELV Dimmable
 - N - 100-277VAC Non Dimming (Mirrors with touch sensors have to use a non-dimming driver)
- ⑧ Mounting

 - 1 - Vertical
 - 2 - Horizontal
- ⑨ Frame Colors

 - BF - Black Frame
 - SF - Silver Frame
 - GF - Gold Frame
 - WF - White Frame
 - BR - Bronze Frame
 - CF - Custom Frame (Specify color on website)
- ⑩ Accessories

 - NA - None
 - TS - Touch Sensor
 - NL - Night Light
 - AF - Anti-Fog
 - CT - CCT Sync
 - AN - Anti-Fog & Night Light
 - AT - Anti-Fog & Touch Sensor
 - AL - Anti-Fog, Night Light, Touch Sensor
 - NT - Night Light & Touch Sensor
 - CN - CCT Sync & Night Light
 - CF - CCT Sync & Anti-Fog
 - CL - CCT Sync, Night Light, Anti-Fog

Additional Custom Specification

- Low-Iron Glasses
- Antimicrobial Powder Coat
- Powder Coated Chassis
- Custom Inset & Frosting Sizes (Up to 2")



T 2 5 i



2700K 3000K 3500K 4000K 5000K 6000K

ITEM CODE CONFIGURATION

Sample Item Code T 2 5 i 0 0 3 2 S 3 0 N 1 B F N A



- ① Types

 - T - Deco Line Thin Frame
- ② Styles

 - 25 - Arch Full Frame Inset Frost
- ③ Lighting Styles

 - i - Indirect Light
- ④ Standard Sizes

 - 2436-24"x36"
 - 2448-24"x48"
 - 3042-30"x42"
 - 3048-30"x48"
 - 3060-30"x60"
 - 3648-36"x48"
 - 3660-36"x60"
 - 3672-36"x72"
 - 4254-42"x54"
 - 4284-42"x84"
 - Custom (Ex: 3173-31.4"x72.5") (Specify the accurate size in additional custom specification notes)
- ⑤ Outputs

 - S - Standard Output (550 lumens/ft; 4.5 watts/ft)
 - H - High Output (750 lumens/ft; 6 watts/ft)
- ⑥ LED CCT (All CRI 90+)

 - 27 - 2700k
 - 30 - 3000k
 - 35 - 3500k
 - 40 - 4000k
 - 50 - 5000k
 - 00 - Color Switchable (Only available with high output with touch sensor & CCT Sync accessory)
- ⑦ Drivers

 - V - 100-277VAC 0-10 Dimmable
 - E - 100-277VAC ELV Dimmable
 - N - 100-277VAC Non Dimming (Mirrors with touch sensors have to use a non-dimming driver)
- ⑧ Mounting

 - 1 - Vertical
 - 2 - Horizontal
- ⑨ Frame Colors

 - BF - Black Frame
 - SF - Silver Frame
 - GF - Gold Frame
 - WF - White Frame
 - BR - Bronze Frame
 - CF - Custom Frame (Specify color on website)
- ⑩ Accessories

 - NA - None
 - TS - Touch Sensor
 - NL - Night Light
 - AF - Anti-Fog
 - CT - CCT Sync
 - AN - Anti-Fog & Night Light
 - AT - Anti-Fog & Touch Sensor
 - AL - Anti-Fog, Night Light, Touch Sensor
 - NT - Night Light & Touch Sensor
 - CN - CCT Sync & Night Light
 - CF - CCT Sync & Anti-Fog
 - CL - CCT Sync, Night Light, Anti-Fog

Additional Custom Specification

- Low-Iron Glasses
- Antimicrobial Powder Coat
- Powder Coated Chassis
- Custom Inset & Frosting Sizes (Up to 2")



T 2 6 i



T 5 1 i



2700K 3000K 3500K 4000K 5000K 6000K 2700K 3000K 3500K 4000K 5000K 6000K

ITEM CODE CONFIGURATION

Sample Item Code T 2 6 i 2 4 3 6 S 3 0 N 1 B F N A



- ① Types

 - T - Deco Line Thin Frame
- ② Styles

 - 26 - Arch Full Frame Edge Frost
- ③ Lighting Styles

 - i - Indirect Light
- ④ Standard Sizes

 - 2436-24"x36"
 - 2448-24"x48"
 - 3042-30"x42"
 - 3048-30"x48"
 - 3060-30"x60"
 - 3648-36"x48"
 - 3660-36"x60"
 - 3672-36"x72"
 - 4254-42"x54"
 - 4284-42"x84"
 - Custom (Ex: 3173-31.4"x72.5") (Specify the accurate size in additional custom specification notes)
- ⑤ Outputs

 - S - Standard Output (550 lumens/ft; 4.5 watts/ft)
 - H - High Output (750 lumens/ft; 6 watts/ft)
- ⑥ LED CCT (All CRI 90+)

 - 27 - 2700k
 - 30 - 3000k
 - 35 - 3500k
 - 40 - 4000k
 - 50 - 5000k
 - 00 - Color Switchable (Only available with high output with touch sensor & CCT Sync accessory)
- ⑦ Drivers

 - V - 100-277VAC 0-10 Dimmable
 - E - 100-277VAC ELV Dimmable
 - N - 100-277VAC Non Dimming (Mirrors with touch sensors have to use a non-dimming driver)
- ⑧ Mounting

 - 1 - Vertical
 - 2 - Horizontal
- ⑨ Frame Colors

 - BF - Black Frame
 - SF - Silver Frame
 - GF - Gold Frame
 - WF - White Frame
 - BR - Bronze Frame
 - CF - Custom Frame (Specify color on website)
- ⑩ Accessories

 - NA - None
 - TS - Touch Sensor
 - NL - Night Light
 - AF - Anti-Fog
 - CT - CCT Sync
 - AN - Anti-Fog & Night Light
 - AT - Anti-Fog & Touch Sensor
 - AL - Anti-Fog, Night Light, Touch Sensor
 - NT - Night Light & Touch Sensor
 - CN - CCT Sync & Night Light
 - CF - CCT Sync & Anti-Fog
 - CL - CCT Sync, Night Light, Anti-Fog

Additional Custom Specification

- Low-Iron Glasses
- Antimicrobial Powder Coat
- Powder Coated Chassis
- Custom Inset & Frosting Sizes (Up to 2")

ITEM CODE CONFIGURATION

Sample Item Code T 5 1 i 0 0 3 2 S 3 0 N 1 B F N A



- ① Types

 - T - Deco Line Thin Frame
- ② Styles

 - 51 - Circle No Frost
- ③ Lighting Styles

 - i - Indirect Light
- ④ Standard Sizes

 - 0032 - 32"
 - 0036 - 36"
 - Custom (Ex: 0038 - 38.1") (Specify the accurate size in additional custom specification notes)
- ⑤ Outputs

 - S - Standard Output (550 lumens/ft; 4.5 watts/ft)
 - H - High Output (750 lumens/ft; 6 watts/ft)
- ⑥ LED CCT (All CRI 90+)

 - 27 - 2700k
 - 30 - 3000k
 - 35 - 3500k
 - 40 - 4000k
 - 50 - 5000k
 - 00 - Color Switchable (Only available with high output with touch sensor & CCT Sync accessory)
- ⑦ Drivers

 - V - 100-277VAC 0-10 Dimmable
 - E - 100-277VAC ELV Dimmable
 - N - 100-277VAC Non Dimming (Mirrors with touch sensors have to use a non-dimming driver)
- ⑧ Mounting

 - 1 - Vertical
 - 2 - Horizontal
- ⑨ Frame Colors

 - BF - Black Frame
 - SF - Silver Frame
 - GF - Gold Frame
 - WF - White Frame
 - BR - Bronze Frame
 - CF - Custom Frame (Specify color on website)
- ⑩ Accessories

 - NA - None
 - TS - Touch Sensor
 - NL - Night Light
 - AF - Anti-Fog
 - CT - CCT Sync
 - AN - Anti-Fog & Night Light
 - AT - Anti-Fog & Touch Sensor
 - AL - Anti-Fog, Night Light, Touch Sensor
 - NT - Night Light & Touch Sensor
 - CN - CCT Sync & Night Light
 - CF - CCT Sync & Anti-Fog
 - CL - CCT Sync, Night Light, Anti-Fog

Additional Custom Specification

- Low-Iron Glasses
- Antimicrobial Powder Coat
- Powder Coated Chassis
- Custom Inset & Frosting Sizes (Up to 2")



T 52 i



T 53 i



2700K 3000K 3500K 4000K 5000K 6000K

ITEM CODE CONFIGURATION

Sample Item Code T 5 2 i 2 4 3 6 S 3 0 N 1 B F N A



- ① Types

 - T - Deco Line Thin Frame
- ② Styles

 - 52 - Oval No Frost
- ③ Lighting Styles

 - i - Indirect Light
- ④ Standard Sizes

 - 2436-24"x36"
 - 2448-24"x48"
 - 3042-30"x42"
 - 3048-30"x48"
 - 3060-30"x60"
 - 3648-36"x48"
 - 3660-36"x60"
 - 3672-36"x72"
 - 4254-42"x54"
 - 4284-42"x84"
 - Custom (Ex: 3173-31.4"x72.5")
(Specify the accurate size in additional custom specification notes)
- ⑤ Outputs

 - S - Standard Output
(550 lumens/ft; 4.5 watts/ft)
 - H - High Output
(750 lumens/ft; 6 watts/ft)
- ⑥ LED CCT (All CRI 90+)

 - 27 - 2700k
 - 30 - 3000k
 - 35 - 3500k
 - 40 - 4000k
 - 50 - 5000k
 - 00 - Color Switchable
(Only available with high output with touch sensor & CCT Sync accessory)
- ⑦ Drivers

 - V - 100-277VAC 0-10 Dimmable
 - E - 100-277VAC ELV Dimmable
 - N - 100-277VAC Non Dimming
(Mirrors with touch sensors have to use a non-dimming driver)
- ⑧ Mounting

 - 1 - Vertical
 - 2 - Horizontal
- ⑨ Frame Colors

 - BF - Black Frame
 - SF - Silver Frame
 - GF - Gold Frame
 - WF - White Frame
 - BR - Bronze Frame
 - CF - Custom Frame
(Specify color on website)
- ⑩ Accessories

 - NA - None
 - TS - Touch Sensor
 - NL - Night Light
 - AF - Anti-Fog
 - CT - CCT Sync
 - AN - Anti-Fog & Night Light
 - AT - Anti-Fog & Touch Sensor
 - AL - Anti-Fog, Night Light, Touch Sensor
 - NT - Night Light & Touch Sensor
 - CN - CCT Sync & Night Light
 - CF - CCT Sync & Anti-Fog
 - CL - CCT Sync, Night Light, Anti-Fog

Additional Custom Specification

- Low-Iron Glasses
- Antimicrobial Powder Coat
- Powder Coated Chassis
- Custom Inset & Frosting Sizes (Up to 2")

ITEM CODE CONFIGURATION

Sample Item Code T 5 3 i 0 0 3 2 S 3 0 N 1 B F N A



- ① Types

 - T - Deco Line Thin Frame
- ② Styles

 - 53 - Stadium No Frost
- ③ Lighting Styles

 - i - Indirect Light
- ④ Standard Sizes

 - 2436-24"x36"
 - 2448-24"x48"
 - 3042-30"x42"
 - 3048-30"x48"
 - 3060-30"x60"
 - 3648-36"x48"
 - 3660-36"x60"
 - 3672-36"x72"
 - 4254-42"x54"
 - 4284-42"x84"
 - Custom (Ex: 3173-31.4"x72.5")
(Specify the accurate size in additional custom specification notes)
- ⑤ Outputs

 - S - Standard Output
(550 lumens/ft; 4.5 watts/ft)
 - H - High Output
(750 lumens/ft; 6 watts/ft)
- ⑥ LED CCT (All CRI 90+)

 - 27 - 2700k
 - 30 - 3000k
 - 35 - 3500k
 - 40 - 4000k
 - 50 - 5000k
 - 00 - Color Switchable
(Only available with high output with touch sensor & CCT Sync accessory)
- ⑦ Drivers

 - V - 100-277VAC 0-10 Dimmable
 - E - 100-277VAC ELV Dimmable
 - N - 100-277VAC Non Dimming
(Mirrors with touch sensors have to use a non-dimming driver)
- ⑧ Mounting

 - 1 - Vertical
 - 2 - Horizontal
- ⑨ Frame Colors

 - BF - Black Frame
 - SF - Silver Frame
 - GF - Gold Frame
 - WF - White Frame
 - BR - Bronze Frame
 - CF - Custom Frame
(Specify color on website)
- ⑩ Accessories

 - NA - None
 - TS - Touch Sensor
 - NL - Night Light
 - AF - Anti-Fog
 - CT - CCT Sync
 - AN - Anti-Fog & Night Light
 - AT - Anti-Fog & Touch Sensor
 - AL - Anti-Fog, Night Light, Touch Sensor
 - NT - Night Light & Touch Sensor
 - CN - CCT Sync & Night Light
 - CF - CCT Sync & Anti-Fog
 - CL - CCT Sync, Night Light, Anti-Fog

Additional Custom Specification

- Low-Iron Glasses
- Antimicrobial Powder Coat
- Powder Coated Chassis
- Custom Inset & Frosting Sizes (Up to 2")



T 55 i



2700K 3000K 3500K 4000K 5000K 6000K

ITEM CODE CONFIGURATION

Sample Item Code T 55 i 2 4 3 6 S 30 N 1 B F N A



- ① Types

 - T - Deco Line Thin Frame
- ② Styles

 - 55 - Arch No Frost
- ③ Lighting Styles

 - i - Indirect Light
- ④ Standard Sizes

 - 2436-24"x36"
 - 2448-24"x48"
 - 3042-30"x42"
 - 3048-30"x48"
 - 3060-30"x60"
 - 3648-36"x48"
 - 3660-36"x60"
 - 3672-36"x72"
 - 4254-42"x54"
 - 4284-42"x84"
 - Custom (Ex: 3173-31.4"x72.5")
(Specify the accurate size in additional custom specification notes)
- ⑤ Outputs

 - S - Standard Output
(550 lumens/ft; 4.5 watts/ft)
 - H - High Output
(750 lumens/ft; 6 watts/ft)
- ⑥ LED CCT (All CRI 90+)

 - 27 - 2700k
 - 30 - 3000k
 - 35 - 3500k
 - 40 - 4000k
 - 50 - 5000k
 - 00 - Color Switchable
(Only available with high output with touch sensor & CCT Sync accessory)
- ⑦ Drivers

 - V - 100-277VAC 0-10 Dimmable
 - E - 100-277VAC ELV Dimmable
 - N - 100-277VAC Non Dimming
(Mirrors with touch sensors have to use a non-dimming driver)
- ⑧ Mounting

 - 1 - Vertical
 - 2 - Horizontal
- ⑨ Frame Colors

 - BF - Black Frame
 - SF - Silver Frame
 - GF - Gold Frame
 - WF - White Frame
 - BR - Bronze Frame
 - CF - Custom Frame
(Specify color on website)
- ⑩ Accessories

 - NA - None
 - TS - Touch Sensor
 - NL - Night Light
 - AF - Anti-Fog
 - CT - CCT Sync
 - AN - Anti-Fog & Night Light
 - AT - Anti-Fog & Touch Sensor
 - AL - Anti-Fog, Night Light, Touch Sensor
 - NT - Night Light & Touch Sensor
 - CN - CCT Sync & Night Light
 - CF - CCT Sync & Anti-Fog
 - CL - CCT Sync, Night Light, Anti-Fog

Additional Custom Specification

- Low-Iron Glasses
- Antimicrobial Powder Coat
- Powder Coated Chassis
- Custom Inset & Frosting Sizes (Up to 2")



T10d3042S30N1BFNA

T03d2472H40N1GFNA



T02i3060H30N2BFNA





W01b W01d W02i W02d W03b W03d

W04i W04d W05i W06i W06d

W07b W07d W08i W08d W09b W09d

W10i W10d W11b W11d

DECO LINE.

Wide Frame

Color Availability:

- White
- Gold
- Silver
- Black
- Bronze
- Custom



W01b

2700K3000K3500K4000K5000K6000K

W01d

2700K3000K3500K4000K5000K6000K

W02i

2700K3000K3500K4000K5000K6000K

W02d

2700K3000K3500K4000K5000K6000K

ITEM CODE CONFIGURATION

Sample Item Code W01d3072H30N2BFNA
①②③④⑤⑥⑦⑧⑨⑩



- ① Types

• W - Deco Line Wide Frame
- ② Styles

• 01 - Full Frame Inset Frost
- ③ Lighting Styles

• d - Direct Light
• b - Direct & Indirect Light
- ④ Standard Sizes

• 2436-24"x36"

• 2448-24"x48"

• 3042-30"x42"

• 3048-30"x48"

• 3060-30"x60"

• 3648-36"x48"

• 3660-36"x60"

• 3672-36"x72"

• 4254-42"x54"

• 4284-42"x84"

• Custom (Ex: 3173-31.4"x72.5")
(Specify the accurate size in additional custom specification notes)
- ⑤ Outputs

• S - Standard Output
(550 lumens/ft; 4.5 watts/ft)
• H - High Output
(750 lumens/ft; 6 watts/ft)
- ⑥ LED CCT (All CRI 90+)

• 27 - 2700k

• 30 - 3000k

• 35 - 3500k

• 40 - 4000k

• 50 - 5000k

• 00 - Color Switchable
(Only available with high output with touch sensor & CCT Sync accessory)
- ⑦ Drivers

• V - 100-277VAC 0-10 Dimmable
• E - 100-277VAC ELV Dimmable
• N - 100-277VAC Non Dimming
(Mirrors with touch sensors have to use a non-dimming driver)
- ⑧ Mounting

• 1 - Vertical
• 2 - Horizontal
- ⑨ Frame Colors

• BF - Black Frame

• SF - Silver Frame

• GF - Gold Frame

• WF - White Frame

• BR - Bronze Frame

• CF - Custom Frame
(Specify color on website)
- ⑩ Accessories

• NA - None

• TS - Touch Sensor

• NL - Night Light

• AF - Anti-Fog

• CT - CCT Sync

• AN - Anti-Fog & Night Light

• AT - Anti-Fog & Touch Sensor

• AL - Anti-Fog, Night Light, Touch Sensor

• NT - Night Light & Touch Sensor

• CN - CCT Sync & Night Light

• CF - CCT Sync & Anti-Fog

• CL - CCT Sync, Night Light, Anti-Fog
- Additional Custom Specification

• Low-Iron Glasses

• Antimicrobial Powder Coat

• Powder Coated Chassis

• Custom Inset & Frosting Sizes (Up to 2")

ITEM CODE CONFIGURATION

Sample Item Code W02d4060S27N2BFNA
①②③④⑤⑥⑦⑧⑨⑩



- ① Types

• W - Deco Line Wide Frame
- ② Styles

• 02 - Full Frame Edge Frost
- ③ Lighting Styles

• d - Direct Light
• i - Indirect Light
- ④ Standard Sizes

• 2436-24"x36"

• 2448-24"x48"

• 3042-30"x42"

• 3048-30"x48"

• 3060-30"x60"

• 3648-36"x48"

• 3660-36"x60"

• 3672-36"x72"

• 4254-42"x54"

• 4284-42"x84"

• Custom (Ex: 3173-31.4"x72.5")
(Specify the accurate size in additional custom specification notes)
- ⑤ Outputs

• S - Standard Output
(550 lumens/ft; 4.5 watts/ft)
• H - High Output
(750 lumens/ft; 6 watts/ft)
- ⑥ LED CCT (All CRI 90+)

• 27 - 2700k

• 30 - 3000k

• 35 - 3500k

• 40 - 4000k

• 50 - 5000k

• 00 - Color Switchable
(Only available with high output with touch sensor & CCT Sync accessory)
- ⑦ Drivers

• V - 100-277VAC 0-10 Dimmable
• E - 100-277VAC ELV Dimmable
• N - 100-277VAC Non Dimming
(Mirrors with touch sensors have to use a non-dimming driver)
- ⑧ Mounting

• 1 - Vertical
• 2 - Horizontal
- ⑨ Frame Colors

• BF - Black Frame

• SF - Silver Frame

• GF - Gold Frame

• WF - White Frame

• BR - Bronze Frame

• CF - Custom Frame
(Specify color on website)
- ⑩ Accessories

• NA - None

• TS - Touch Sensor

• NL - Night Light

• AF - Anti-Fog

• CT - CCT Sync

• AN - Anti-Fog & Night Light

• AT - Anti-Fog & Touch Sensor

• AL - Anti-Fog, Night Light, Touch Sensor

• NT - Night Light & Touch Sensor

• CN - CCT Sync & Night Light

• CF - CCT Sync & Anti-Fog

• CL - CCT Sync, Night Light, Anti-Fog
- Additional Custom Specification

• Low-Iron Glasses

• Antimicrobial Powder Coat

• Powder Coated Chassis

• Custom Inset & Frosting Sizes (Up to 2")



W03b



W03d



W04i



W04d



2700K 3000K 3500K 4000K 5000K 6000K

2700K 3000K 3500K 4000K 5000K 6000K

ITEM CODE CONFIGURATION

Sample Item Code W03d3072H40N1BFNA



- ① **Types**

 - W - Deco Line Wide Frame
- ② **Styles**

 - 03 - Double Long Side Inset Frost
- ③ **Lighting Styles**

 - d - Direct Light
 - b - Direct & Indirect Light
- ④ **Standard Sizes**

 - 2436-24"x36"
 - 2448-24"x48"
 - 3042-30"x42"
 - 3048-30"x48"
 - 3060-30"x60"
 - 3648-36"x48"
 - 3660-36"x60"
 - 3672-36"x72"
 - 4254-42"x54"
 - 4284-42"x84"
 - Custom (Ex: 3173-31.4"x72.5") (Specify the accurate size in additional custom specification notes)
- ⑤ **Outputs**

 - S - Standard Output (550 lumens/ft; 4.5 watts/ft)
 - H - High Output (750 lumens/ft; 6 watts/ft)
- ⑥ **LED CCT** (All CRI 90+)

 - 27 - 2700k
 - 30 - 3000k
 - 35 - 3500k
 - 40 - 4000k
 - 50 - 5000k
 - 00 - Color Switchable (Only available with high output with touch sensor & CCT Sync accessory)
- ⑦ **Drivers**

 - V - 100-277VAC 0-10 Dimmable
 - E - 100-277VAC ELV Dimmable
 - N - 100-277VAC Non Dimming (Mirrors with touch sensors have to use a non-dimming driver)
- ⑧ **Mounting**

 - 1 - Vertical
 - 2 - Horizontal
- ⑨ **Frame Colors**

 - BF - Black Frame
 - SF - Silver Frame
 - GF - Gold Frame
 - WF - White Frame
 - BR - Bronze Frame
 - CF - Custom Frame (Specify color on website)
- ⑩ **Accessories**

 - NA - None
 - TS - Touch Sensor
 - NL - Night Light
 - AF - Anti-Fog
 - CT - CCT Sync
 - AN - Anti-Fog & Night Light
 - AT - Anti-Fog & Touch Sensor
 - AL - Anti-Fog, Night Light, Touch Sensor
 - NT - Night Light & Touch Sensor
 - CN - CCT Sync & Night Light
 - CF - CCT Sync & Anti-Fog
 - CL - CCT Sync, Night Light, Anti-Fog
- Additional Custom Specification**

 - Low-Iron Glasses
 - Antimicrobial Powder Coat
 - Powder Coated Chassis
 - Custom Inset & Frosting Sizes (Up to 2")

ITEM CODE CONFIGURATION

Sample Item Code W04d3072S40N1BFNA



- ① **Types**

 - W - Deco Line Wide Frame
- ② **Styles**

 - 04 - Double Long Side Edge Frost
- ③ **Lighting Styles**

 - d - Direct Light
 - i - Indirect Light
- ④ **Standard Sizes**

 - 2436-24"x36"
 - 2448-24"x48"
 - 3042-30"x42"
 - 3048-30"x48"
 - 3060-30"x60"
 - 3648-36"x48"
 - 3660-36"x60"
 - 3672-36"x72"
 - 4254-42"x54"
 - 4284-42"x84"
 - Custom (Ex: 3173-31.4"x72.5") (Specify the accurate size in additional custom specification notes)
- ⑤ **Outputs**

 - S - Standard Output (550 lumens/ft; 4.5 watts/ft)
 - H - High Output (750 lumens/ft; 6 watts/ft)
- ⑥ **LED CCT** (All CRI 90+)

 - 27 - 2700k
 - 30 - 3000k
 - 35 - 3500k
 - 40 - 4000k
 - 50 - 5000k
 - 00 - Color Switchable (Only available with high output with touch sensor & CCT Sync accessory)
- ⑦ **Drivers**

 - V - 100-277VAC 0-10 Dimmable
 - E - 100-277VAC ELV Dimmable
 - N - 100-277VAC Non Dimming (Mirrors with touch sensors have to use a non-dimming driver)
- ⑧ **Mounting**

 - 1 - Vertical
 - 2 - Horizontal
- ⑨ **Frame Colors**

 - BF - Black Frame
 - SF - Silver Frame
 - GF - Gold Frame
 - WF - White Frame
 - BR - Bronze Frame
 - CF - Custom Frame (Specify color on website)
- ⑩ **Accessories**

 - NA - None
 - TS - Touch Sensor
 - NL - Night Light
 - AF - Anti-Fog
 - CT - CCT Sync
 - AN - Anti-Fog & Night Light
 - AT - Anti-Fog & Touch Sensor
 - AL - Anti-Fog, Night Light, Touch Sensor
 - NT - Night Light & Touch Sensor
 - CN - CCT Sync & Night Light
 - CF - CCT Sync & Anti-Fog
 - CL - CCT Sync, Night Light, Anti-Fog
- Additional Custom Specification**

 - Low-Iron Glasses
 - Antimicrobial Powder Coat
 - Powder Coated Chassis
 - Custom Inset & Frosting Sizes (Up to 2")



W05i



2700K 3000K 3500K 4000K 5000K 6000K

ITEM CODE CONFIGURATION

Sample Item Code W05i3048S30N1SFNA



- ① Types

 - W - Deco Line Wide Frame
- ② Styles

 - 05 - No Frost, All Sides Illumination
- ③ Lighting Styles

 - i - Indirect Light
- ④ Standard Sizes

 - 2436-24"x36"
 - 2448-24"x48"
 - 3042-30"x42"
 - 3048-30"x48"
 - 3060-30"x60"
 - 3648-36"x48"
 - 3660-36"x60"
 - 3672-36"x72"
 - 4254-42"x54"
 - 4284-42"x84"
 - Custom (Ex: 3173-31.4"x72.5") (Specify the accurate size in additional custom specification notes)
- ⑤ Outputs

 - S - Standard Output (550 lumens/ft; 4.5 watts/ft)
 - H - High Output (750 lumens/ft; 6 watts/ft)
- ⑥ LED CCT (All CRI 90+)

 - 27 - 2700k
 - 30 - 3000k
 - 35 - 3500k
 - 40 - 4000k
 - 50 - 5000k
 - 00 - Color Switchable (Only available with high output with touch sensor & CCT Sync accessory)
- ⑦ Drivers

 - V - 100-277VAC 0-10 Dimmable
 - E - 100-277VAC ELV Dimmable
 - N - 100-277VAC Non Dimming (Mirrors with touch sensors have to use a non-dimming driver)
- ⑧ Mounting

 - 1 - Vertical
 - 2 - Horizontal
- ⑨ Frame Colors

 - BF - Black Frame
 - SF - Silver Frame
 - GF - Gold Frame
 - WF - White Frame
 - BR - Bronze Frame
 - CF - Custom Frame (Specify color on website)
- ⑩ Accessories

 - NA - None
 - TS - Touch Sensor
 - NL - Night Light
 - AF - Anti-Fog
 - CT - CCT Sync
 - AN - Anti-Fog & Night Light
 - AT - Anti-Fog & Touch Sensor
 - AL - Anti-Fog, Night Light, Touch Sensor
 - NT - Night Light & Touch Sensor
 - CN - CCT Sync & Night Light
 - CF - CCT Sync & Anti-Fog
 - CL - CCT Sync, Night Light, Anti-Fog
- Additional Custom Specification

 - Low-Iron Glasses
 - Antimicrobial Powder Coat
 - Powder Coated Chassis
 - Custom Inset & Frosting Sizes (Up to 2")



W06i



2700K 3000K 3500K 4000K 5000K 6000K

ITEM CODE CONFIGURATION

Sample Item Code W06d4092S40N2BFNA



- ① Types

 - W - Deco Line Wide Frame
- ② Styles

 - 06 - Double Short Side Edge Frost
- ③ Lighting Styles

 - d - Direct Light
 - i - Indirect Light
- ④ Standard Sizes

 - 2436-24"x36"
 - 2448-24"x48"
 - 3042-30"x42"
 - 3048-30"x48"
 - 3060-30"x60"
 - 3648-36"x48"
 - 3660-36"x60"
 - 3672-36"x72"
 - 4254-42"x54"
 - 4284-42"x84"
 - Custom (Ex: 3173-31.4"x72.5") (Specify the accurate size in additional custom specification notes)
- ⑤ Outputs

 - S - Standard Output (550 lumens/ft; 4.5 watts/ft)
 - H - High Output (750 lumens/ft; 6 watts/ft)
- ⑥ LED CCT (All CRI 90+)

 - 27 - 2700k
 - 30 - 3000k
 - 35 - 3500k
 - 40 - 4000k
 - 50 - 5000k
 - 00 - Color Switchable (Only available with high output with touch sensor & CCT Sync accessory)
- ⑦ Drivers

 - V - 100-277VAC 0-10 Dimmable
 - E - 100-277VAC ELV Dimmable
 - N - 100-277VAC Non Dimming (Mirrors with touch sensors have to use a non-dimming driver)
- ⑧ Mounting

 - 1 - Vertical
 - 2 - Horizontal
- ⑨ Frame Colors

 - BF - Black Frame
 - SF - Silver Frame
 - GF - Gold Frame
 - WF - White Frame
 - BR - Bronze Frame
 - CF - Custom Frame (Specify color on website)
- ⑩ Accessories

 - NA - None
 - TS - Touch Sensor
 - NL - Night Light
 - AF - Anti-Fog
 - CT - CCT Sync
 - AN - Anti-Fog & Night Light
 - AT - Anti-Fog & Touch Sensor
 - AL - Anti-Fog, Night Light, Touch Sensor
 - NT - Night Light & Touch Sensor
 - CN - CCT Sync & Night Light
 - CF - CCT Sync & Anti-Fog
 - CL - CCT Sync, Night Light, Anti-Fog
- Additional Custom Specification

 - Low-Iron Glasses
 - Antimicrobial Powder Coat
 - Powder Coated Chassis
 - Custom Inset & Frosting Sizes (Up to 2")



2700K	3000K	3500K	4000K	5000K	6000K	2700K	3000K	3500K	4000K	5000K	6000K
-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------

ITEM CODE CONFIGURATION

Sample Item Code W07d3678S40N2BFNA



- ① Types

 - W - Deco Line Wide Frame
- ② Styles

 - 07 - Double Short Side Inset Frost
- ③ Lighting Styles

 - d - Direct Light
 - b - Direct & Indirect Light
- ④ Standard Sizes

 - 2436-24"x36"
 - 2448-24"x48"
 - 3042-30"x42"
 - 3048-30"x48"
 - 3060-30"x60"
 - 3648-36"x48"
 - 3660-36"x60"
 - 3672-36"x72"
 - 4254-42"x54"
 - 4284-42"x84"
 - Custom (Ex: 3173-31.4"x72.5")
(Specify the accurate size in additional custom specification notes)
- ⑤ Outputs

 - S - Standard Output
(550 lumens/ft; 4.5 watts/ft)
 - H - High Output
(750 lumens/ft; 6 watts/ft)
- ⑥ LED CCT (All CRI 90+)

 - 27 - 2700k
 - 30 - 3000k
 - 35 - 3500k
 - 40 - 4000k
 - 50 - 5000k
 - 00 - Color Switchable
(Only available with high output with touch sensor & CCT Sync accessory)
- ⑦ Drivers

 - V - 100-277VAC 0-10 Dimmable
 - E - 100-277VAC ELV Dimmable
 - N - 100-277VAC Non Dimming
(Mirrors with touch sensors have to use a non-dimming driver)
- ⑧ Mounting

 - 1 - Vertical
 - 2 - Horizontal
- ⑨ Frame Colors

 - BF - Black Frame
 - SF - Silver Frame
 - GF - Gold Frame
 - WF - White Frame
 - BR - Bronze Frame
 - CF - Custom Frame
(Specify color on website)
- ⑩ Accessories

 - NA - None
 - TS - Touch Sensor
 - NL - Night Light
 - AF - Anti-Fog
 - CT - CCT Sync
 - AN - Anti-Fog & Night Light
 - AT - Anti-Fog & Touch Sensor
 - AL - Anti-Fog, Night Light, Touch Sensor
 - NT - Night Light & Touch Sensor
 - CN - CCT Sync & Night Light
 - CF - CCT Sync & Anti-Fog
 - CL - CCT Sync, Night Light, Anti-Fog
- Additional Custom Specification

 - Low-Iron Glasses
 - Antimicrobial Powder Coat
 - Powder Coated Chassis
 - Custom Inset & Frosting Sizes (Up to 2")

ITEM CODE CONFIGURATION

Sample Item Code W08i4092H50N2BFNA



- ① Types

 - W - Deco Line Wide Frame
- ② Styles

 - 08 - Single Long Side Edge Frost
- ③ Lighting Styles

 - d - Direct Light
 - i - Indirect Light
- ④ Standard Sizes

 - 2436-24"x36"
 - 2448-24"x48"
 - 3042-30"x42"
 - 3048-30"x48"
 - 3060-30"x60"
 - 3648-36"x48"
 - 3660-36"x60"
 - 3672-36"x72"
 - 4254-42"x54"
 - 4284-42"x84"
 - Custom (Ex: 3173-31.4"x72.5")
(Specify the accurate size in additional custom specification notes)
- ⑤ Outputs

 - S - Standard Output
(550 lumens/ft; 4.5 watts/ft)
 - H - High Output
(750 lumens/ft; 6 watts/ft)
- ⑥ LED CCT (All CRI 90+)

 - 27 - 2700k
 - 30 - 3000k
 - 35 - 3500k
 - 40 - 4000k
 - 50 - 5000k
 - 00 - Color Switchable
(Only available with high output with touch sensor & CCT Sync accessory)
- ⑦ Drivers

 - V - 100-277VAC 0-10 Dimmable
 - E - 100-277VAC ELV Dimmable
 - N - 100-277VAC Non Dimming
(Mirrors with touch sensors have to use a non-dimming driver)
- ⑧ Mounting

 - 1 - Vertical
 - 2 - Horizontal
- ⑨ Frame Colors

 - BF - Black Frame
 - SF - Silver Frame
 - GF - Gold Frame
 - WF - White Frame
 - BR - Bronze Frame
 - CF - Custom Frame
(Specify color on website)
- ⑩ Accessories

 - NA - None
 - TS - Touch Sensor
 - NL - Night Light
 - AF - Anti-Fog
 - CT - CCT Sync
 - AN - Anti-Fog & Night Light
 - AT - Anti-Fog & Touch Sensor
 - AL - Anti-Fog, Night Light, Touch Sensor
 - NT - Night Light & Touch Sensor
 - CN - CCT Sync & Night Light
 - CF - CCT Sync & Anti-Fog
 - CL - CCT Sync, Night Light, Anti-Fog
- Additional Custom Specification

 - Low-Iron Glasses
 - Antimicrobial Powder Coat
 - Powder Coated Chassis
 - Custom Inset & Frosting Sizes (Up to 2")



ITEM CODE CONFIGURATION

Sample Item Code W09d3660H30N2BFNA
12345678910



- ① **Types**

 - W - Deco Line Wide Frame
- ② **Styles**

 - 09 - Single Long Side Inset Frost
- ③ **Lighting Styles**

 - d - Direct Light
 - b - Direct & Indirect Light
- ④ **Standard Sizes**

 - 2436-24"x36"
 - 2448-24"x48"
 - 3042-30"x42"
 - 3048-30"x48"
 - 3060-30"x60"
 - 3648-36"x48"
 - 3660-36"x60"
 - 3672-36"x72"
 - 4254-42"x54"
 - 4284-42"x84"
 - Custom (Ex: 3173-31.4"x72.5")
(Specify the accurate size in additional custom specification notes)
- ⑤ **Outputs**

 - S - Standard Output
(550 lumens/ft; 4.5 watts/ft)
 - H - High Output
(750 lumens/ft; 6 watts/ft)
- ⑥ **LED CCT** (All CRI 90+)

 - 27 - 2700k
 - 30 - 3000k
 - 35 - 3500k
 - 40 - 4000k
 - 50 - 5000k
 - 00 - Color Switchable
(Only available with high output with touch sensor & CCT Sync accessory)
- ⑦ **Drivers**

 - V - 100-277VAC 0-10 Dimmable
 - E - 100-277VAC ELV Dimmable
 - N - 100-277VAC Non Dimming
(Mirrors with touch sensors have to use a non-dimming driver)
- ⑧ **Mounting**

 - 1 - Vertical
 - 2 - Horizontal
- ⑨ **Frame Colors**

 - BF - Black Frame
 - SF - Silver Frame
 - GF - Gold Frame
 - WF - White Frame
 - BR - Bronze Frame
 - CF - Custom Frame
(Specify color on website)
- ⑩ **Accessories**

 - NA - None
 - TS - Touch Sensor
 - NL - Night Light
 - AF - Anti-Fog
 - CT - CCT Sync
 - AN - Anti-Fog & Night Light
 - AT - Anti-Fog & Touch Sensor
 - AL - Anti-Fog, Night Light, Touch Sensor
 - NT - Night Light & Touch Sensor
 - CN - CCT Sync & Night Light
 - CF - CCT Sync & Anti-Fog
 - CL - CCT Sync, Night Light, Anti-Fog
- Additional Custom Specification**

 - Low-Iron Glasses
 - Antimicrobial Powder Coat
 - Powder Coated Chassis
 - Custom Inset & Frosting Sizes (Up to 2")

ITEM CODE CONFIGURATION

Sample Item Code W10i2448H00N1BFTS
12345678910



- ① **Types**

 - W - Deco Line Wide Frame
- ② **Styles**

 - 10 - Single Short Side Edge Frost
- ③ **Lighting Styles**

 - d - Direct Light
 - i - Indirect Light
- ④ **Standard Sizes**

 - 2436-24"x36"
 - 2448-24"x48"
 - 3042-30"x42"
 - 3048-30"x48"
 - 3060-30"x60"
 - 3648-36"x48"
 - 3660-36"x60"
 - 3672-36"x72"
 - 4254-42"x54"
 - 4284-42"x84"
 - Custom (Ex: 3173-31.4"x72.5")
(Specify the accurate size in additional custom specification notes)
- ⑤ **Outputs**

 - S - Standard Output
(550 lumens/ft; 4.5 watts/ft)
 - H - High Output
(750 lumens/ft; 6 watts/ft)
- ⑥ **LED CCT** (All CRI 90+)

 - 27 - 2700k
 - 30 - 3000k
 - 35 - 3500k
 - 40 - 4000k
 - 50 - 5000k
 - 00 - Color Switchable
(Only available with high output with touch sensor & CCT Sync accessory)
- ⑦ **Drivers**

 - V - 100-277VAC 0-10 Dimmable
 - E - 100-277VAC ELV Dimmable
 - N - 100-277VAC Non Dimming
(Mirrors with touch sensors have to use a non-dimming driver)
- ⑧ **Mounting**

 - 1 - Vertical
 - 2 - Horizontal
- ⑨ **Frame Colors**

 - BF - Black Frame
 - SF - Silver Frame
 - GF - Gold Frame
 - WF - White Frame
 - BR - Bronze Frame
 - CF - Custom Frame
(Specify color on website)
- ⑩ **Accessories**

 - NA - None
 - TS - Touch Sensor
 - NL - Night Light
 - AF - Anti-Fog
 - CT - CCT Sync
 - AN - Anti-Fog & Night Light
 - AT - Anti-Fog & Touch Sensor
 - AL - Anti-Fog, Night Light, Touch Sensor
 - NT - Night Light & Touch Sensor
 - CN - CCT Sync & Night Light
 - CF - CCT Sync & Anti-Fog
 - CL - CCT Sync, Night Light, Anti-Fog
- Additional Custom Specification**

 - Low-Iron Glasses
 - Antimicrobial Powder Coat
 - Powder Coated Chassis
 - Custom Inset & Frosting Sizes (Up to 2")



W11b



W11d



2700K 3000K 3500K 4000K 5000K 6000K

ITEM CODE CONFIGURATION

Sample Item Code **W 1 1 d 2 4 4 8 H 4 0 N 1 S F N A**
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩



- ① **Types**

 - W - Deco Line Wide Frame
- ② **Styles**

 - 11 - Single Short Side Inset Frost
- ③ **Lighting Styles**

 - d - Direct Light
 - b - Direct & Indirect Light
- ④ **Standard Sizes**

 - 2436-24"x36"
 - 2448-24"x48"
 - 3042-30"x42"
 - 3048-30"x48"
 - 3060-30"x60"
 - 3648-36"x48"
 - 3660-36"x60"
 - 3672-36"x72"
 - 4254-42"x54"
 - 4284-42"x84"
 - Custom (Ex: 3173-31.4"x72.5")
(Specify the accurate size in additional custom specification notes)
- ⑤ **Outputs**

 - S - Standard Output
(550 lumens/ft; 4.5 watts/ft)
 - H - High Output
(750 lumens/ft; 6 watts/ft)
- ⑥ **LED CCT** (All CRI 90+)

 - 27 - 2700k
 - 30 - 3000k
 - 35 - 3500k
 - 40 - 4000k
 - 50 - 5000k
 - 00 - Color Switchable
(Only available with high output with touch sensor & CCT Sync accessory)
- ⑦ **Drivers**

 - V - 100-277VAC 0-10 Dimmable
 - E - 100-277VAC ELV Dimmable
 - N - 100-277VAC Non Dimming
(Mirrors with touch sensors have to use a non-dimming driver)
- ⑧ **Mounting**

 - 1 - Vertical
 - 2 - Horizontal
- ⑨ **Frame Colors**

 - BF - Black Frame
 - SF - Silver Frame
 - GF - Gold Frame
 - WF - White Frame
 - BR - Bronze Frame
 - CF - Custom Frame
(Specify color on website)
- ⑩ **Accessories**

 - NA - None
 - TS - Touch Sensor
 - NL - Night Light
 - AF - Anti-Fog
 - CT - CCT Sync
 - AN - Anti-Fog & Night Light
 - AT - Anti-Fog & Touch Sensor
 - AL - Anti-Fog, Night Light, Touch Sensor
 - NT - Night Light & Touch Sensor
 - CN - CCT Sync & Night Light
 - CF - CCT Sync & Anti-Fog
 - CL - CCT Sync, Night Light, Anti-Fog

Additional Custom Specification

- Low-Iron Glasses
- Antimicrobial Powder Coat
- Powder Coated Chassis
- Custom Inset & Frosting Sizes (Up to 2")



W01d3072H00E2SFNA



W02d3660H30N2BFNA






BRIGHT LINE.


Light in Frame

Color Availability:







B 0 5 b




B 0 5 d



B 4 5 b



B 4 5 d



2700K 3000K 3500K 4000K 5000K 6000K

2700K 3000K 3500K 4000K 5000K 6000K

ITEM CODE CONFIGURATION

Sample Item Code B 0 5 b 3 0 7 2 S 3 0 N 1 B F N A



- ① Types

 - B - Bright Line
- ② Styles

 - 05 - Full Frame Inward Lighting
- ③ Lighting Styles

 - d - Direct Inward Light
 - b - Direct & Indirect Light
- ④ Standard Sizes

 - 2436-24"x36"
 - 2448-24"x48"
 - 3042-30"x42"
 - 3048-30"x48"
 - 3060-30"x60"
 - 3648-36"x48"
 - 3660-36"x60"
 - 3672-36"x72"
 - 4254-42"x54"
 - 4284-42"x84"
 - Custom (Ex: 3173-31.4"x72.5")
(Specify the accurate size in additional custom specification notes)
- ⑤ Outputs

 - S - Standard Output
(550 lumens/ft; 4.5 watts/ft)
 - H - High Output
(750 lumens/ft; 6 watts/ft)
- ⑥ LED CCT (All CRI 90+)

 - 27 - 2700k
 - 30 - 3000k
 - 35 - 3500k
 - 40 - 4000k
 - 50 - 5000k
 - 00 - Color Switchable
(Only available with high output with touch sensor & CCT Sync accessory)
- ⑦ Drivers

 - V - 100-277VAC 0-10 Dimmable
 - E - 100-277VAC ELV Dimmable
 - N - 100-277VAC Non Dimming
(Mirrors with touch sensors have to use a non-dimming driver)
- ⑧ Mounting

 - 1 - Vertical
 - 2 - Horizontal
- ⑨ Frame Colors

 - BF - Black Frame
 - SF - Silver Frame
 - GF - Gold Frame
 - WF - White Frame
 - BR - Bronze Frame
 - CF - Custom Frame
(Specify color on website)
- ⑩ Accessories

 - NA - None
 - TS - Touch Sensor
 - NL - Night Light
 - AF - Anti-Fog
 - CT - CCT Sync
 - AN - Anti-Fog & Night Light
 - AT - Anti-Fog & Touch Sensor
 - AL - Anti-Fog, Night Light, Touch Sensor
 - NT - Night Light & Touch Sensor
 - CN - CCT Sync & Night Light
 - CF - CCT Sync & Anti-Fog
 - CL - CCT Sync, Night Light, Anti-Fog

Additional Custom Specification

- Low-Iron Glasses
- Antimicrobial Powder Coat
- Powder Coated Chassis
- Custom Inset & Frosting Sizes (Up to 2")

ITEM CODE CONFIGURATION

Sample Item Code B 4 5 b 2 4 3 6 S 3 0 N 1 B F N A



- ① Types

 - B - Bright Line
- ② Styles

 - 45 - Rounded Corners Full Frame Inward Lighting
- ③ Lighting Styles

 - d - Direct Inward Light
 - b - Direct & Indirect Light
- ④ Standard Sizes

 - 2436-24"x36"
 - 2448-24"x48"
 - 3042-30"x42"
 - 3048-30"x48"
 - 3060-30"x60"
 - 3648-36"x48"
 - 3660-36"x60"
 - 3672-36"x72"
 - 4254-42"x54"
 - 4284-42"x84"
 - Custom (Ex: 3173-31.4"x72.5")
(Specify the accurate size in additional custom specification notes)
- ⑤ Outputs

 - S - Standard Output
(550 lumens/ft; 4.5 watts/ft)
 - H - High Output
(750 lumens/ft; 6 watts/ft)
- ⑥ LED CCT (All CRI 90+)

 - 27 - 2700k
 - 30 - 3000k
 - 35 - 3500k
 - 40 - 4000k
 - 50 - 5000k
 - 00 - Color Switchable
(Only available with high output with touch sensor & CCT Sync accessory)
- ⑦ Drivers

 - V - 100-277VAC 0-10 Dimmable
 - E - 100-277VAC ELV Dimmable
 - N - 100-277VAC Non Dimming
(Mirrors with touch sensors have to use a non-dimming driver)
- ⑧ Mounting

 - 1 - Vertical
 - 2 - Horizontal
- ⑨ Frame Colors

 - BF - Black Frame
 - SF - Silver Frame
 - GF - Gold Frame
 - WF - White Frame
 - BR - Bronze Frame
 - CF - Custom Frame
(Specify color on website)
- ⑩ Accessories

 - NA - None
 - TS - Touch Sensor
 - NL - Night Light
 - AF - Anti-Fog
 - CT - CCT Sync
 - AN - Anti-Fog & Night Light
 - AT - Anti-Fog & Touch Sensor
 - AL - Anti-Fog, Night Light, Touch Sensor
 - NT - Night Light & Touch Sensor
 - CN - CCT Sync & Night Light
 - CF - CCT Sync & Anti-Fog
 - CL - CCT Sync, Night Light, Anti-Fog

Additional Custom Specification

- Low-Iron Glasses
- Antimicrobial Powder Coat
- Powder Coated Chassis
- Custom Inset & Frosting Sizes (Up to 2")



ITEM CODE CONFIGURATION

Sample Item Code **B 5 1 b 0 0 3 2 S 3 0 N 1 S F N A**
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩



- ① **Types**
 - B - Bright Line
- ② **Styles**
 - 51 - Circle Full Frame Inward Lighting
- ③ **Lighting Styles**
 - d - Direct Inward Light
 - b - Direct & Indirect Light
- ④ **Standard Sizes**
 - 0032 - 32"
 - 0036 - 36"
 - Custom (Ex: 0038 - 38.1")
(Specify the accurate size in additional custom specification notes)
- ⑤ **Outputs**
 - S - Standard Output (550 lumens/ft; 4.5 watts/ft)
 - H - High Output (750 lumens/ft; 6 watts/ft)
- ⑥ **LED CCT** (All CRI 90+)
 - 27 - 2700k
 - 30 - 3000k
 - 35 - 3500k
 - 40 - 4000k
 - 50 - 5000k
 - 00 - Color Switchable
(Only available with high output with touch sensor & CCT Sync accessory)
- ⑦ **Drivers**
 - V - 100-277VAC 0-10 Dimmable
 - E - 100-277VAC ELV Dimmable
 - N - 100-277VAC Non Dimming
(Mirrors with touch sensors have to use a non-dimming driver)
- ⑧ **Mounting**
 - 1 - Vertical
 - 2 - Horizontal
- ⑨ **Frame Colors**
 - BF - Black Frame
 - SF - Silver Frame
 - GF - Gold Frame
 - WF - White Frame
 - BR - Bronze Frame
 - CF - Custom Frame
(Specify color on website)
- ⑩ **Accessories**
 - NA - None
 - TS - Touch Sensor
 - NL - Night Light
 - AF - Anti-Fog
 - CT - CCT Sync
 - AN - Anti-Fog & Night Light
 - AT - Anti-Fog & Touch Sensor
 - AL - Anti-Fog, Night Light, Touch Sensor
 - NT - Night Light & Touch Sensor
 - CN - CCT Sync & Night Light
 - CF - CCT Sync & Anti-Fog
 - CL - CCT Sync, Night Light, Anti-Fog
- Additional Custom Specification**
 - Low-Iron Glasses
 - Antimicrobial Powder Coat
 - Powder Coated Chassis
 - Custom Inset & Frosting Sizes (Up to 2")

ITEM CODE CONFIGURATION

Sample Item Code **B 5 2 b 2 4 3 6 S 3 0 N 1 G F N A**
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩



- ① **Types**
 - B - Bright Line
- ② **Styles**
 - 52 - Oval Full Frame Inward Lighting
- ③ **Lighting Styles**
 - d - Direct Inward Light
 - b - Direct & Indirect Light
- ④ **Standard Sizes**
 - 2436-24"x36"
 - 2448-24"x48"
 - 3042-30"x42"
 - 3048-30"x48"
 - 3060-30"x60"
 - 3648-36"x48"
 - 3660-36"x60"
 - 3672-36"x72"
 - 4254-42"x54"
 - 4284-42"x84"
 - Custom (Ex: 3173-31.4"x72.5")
(Specify the accurate size in additional custom specification notes)
- ⑤ **Outputs**
 - S - Standard Output (550 lumens/ft; 4.5 watts/ft)
 - H - High Output (750 lumens/ft; 6 watts/ft)
- ⑥ **LED CCT** (All CRI 90+)
 - 27 - 2700k
 - 30 - 3000k
 - 35 - 3500k
 - 40 - 4000k
 - 50 - 5000k
 - 00 - Color Switchable
(Only available with high output with touch sensor & CCT Sync accessory)
- ⑦ **Drivers**
 - V - 100-277VAC 0-10 Dimmable
 - E - 100-277VAC ELV Dimmable
 - N - 100-277VAC Non Dimming
(Mirrors with touch sensors have to use a non-dimming driver)
- ⑧ **Mounting**
 - 1 - Vertical
 - 2 - Horizontal
- ⑨ **Frame Colors**
 - BF - Black Frame
 - SF - Silver Frame
 - GF - Gold Frame
 - WF - White Frame
 - BR - Bronze Frame
 - CF - Custom Frame
(Specify color on website)
- ⑩ **Accessories**
 - NA - None
 - TS - Touch Sensor
 - NL - Night Light
 - AF - Anti-Fog
 - CT - CCT Sync
 - AN - Anti-Fog & Night Light
 - AT - Anti-Fog & Touch Sensor
 - AL - Anti-Fog, Night Light, Touch Sensor
 - NT - Night Light & Touch Sensor
 - CN - CCT Sync & Night Light
 - CF - CCT Sync & Anti-Fog
 - CL - CCT Sync, Night Light, Anti-Fog
- Additional Custom Specification**
 - Low-Iron Glasses
 - Antimicrobial Powder Coat
 - Powder Coated Chassis
 - Custom Inset & Frosting Sizes (Up to 2")



ITEM CODE CONFIGURATION

Sample Item Code **B 5 3 d 2 4 3 6 S 3 0 N 1 G F N A**
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩



- ① **Types**
 - B - Bright Line
- ② **Styles**
 - 53 - Stadium Full Frame Inward Lighting
- ③ **Lighting Styles**
 - d - Direct Inward Light
 - b - Direct & Indirect Light
- ④ **Standard Sizes**
 - 2436-24"x36"
 - 2448-24"x48"
 - 3042-30"x42"
 - 3048-30"x48"
 - 3060-30"x60"
 - 3648-36"x48"
 - 3660-36"x60"
 - 3672-36"x72"
 - 4254-42"x54"
 - 4284-42"x84"
 - Custom (Ex: 3173-31.4"x72.5")
(Specify the accurate size in additional custom specification notes)
- ⑤ **Outputs**
 - S - Standard Output
(550 lumens/ft; 4.5 watts/ft)
 - H - High Output
(750 lumens/ft; 6 watts/ft)
- ⑥ **LED CCT** (All CRI 90+)
 - 27 - 2700k
 - 30 - 3000k
 - 35 - 3500k
 - 40 - 4000k
 - 50 - 5000k
 - 00 - Color Switchable
(Only available with high output with touch sensor & CCT Sync accessory)
- ⑦ **Drivers**
 - V - 100-277VAC 0-10 Dimmable
 - E - 100-277VAC ELV Dimmable
 - N - 100-277VAC Non Dimming
(Mirrors with touch sensors have to use a non-dimming driver)
- ⑧ **Mounting**
 - 1 - Vertical
 - 2 - Horizontal
- ⑨ **Frame Colors**
 - BF - Black Frame
 - SF - Silver Frame
 - GF - Gold Frame
 - WF - White Frame
 - BR - Bronze Frame
 - CF - Custom Frame
(Specify color on website)
- ⑩ **Accessories**
 - NA - None
 - TS - Touch Sensor
 - NL - Night Light
 - AF - Anti-Fog
 - CT - CCT Sync
 - AN - Anti-Fog & Night Light
 - AT - Anti-Fog & Touch Sensor
 - AL - Anti-Fog, Night Light, Touch Sensor
 - NT - Night Light & Touch Sensor
 - CN - CCT Sync & Night Light
 - CF - CCT Sync & Anti-Fog
 - CL - CCT Sync, Night Light, Anti-Fog
- Additional Custom Specification**
 - Low-Iron Glasses
 - Antimicrobial Powder Coat
 - Powder Coated Chassis
 - Custom Inset & Frosting Sizes (Up to 2")

ITEM CODE CONFIGURATION

Sample Item Code **B 5 5 b 2 4 3 6 S 3 0 N 1 G F N A**
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩



- ① **Types**
 - B - Bright Line
- ② **Styles**
 - 55 - Arch Full Frame Inward Lighting
- ③ **Lighting Styles**
 - d - Direct Inward Light
 - b - Direct & Indirect Light
- ④ **Standard Sizes**
 - 2436-24"x36"
 - 2448-24"x48"
 - 3042-30"x42"
 - 3048-30"x48"
 - 3060-30"x60"
 - 3648-36"x48"
 - 3660-36"x60"
 - 3672-36"x72"
 - 4254-42"x54"
 - 4284-42"x84"
 - Custom (Ex: 3173-31.4"x72.5")
(Specify the accurate size in additional custom specification notes)
- ⑤ **Outputs**
 - S - Standard Output
(550 lumens/ft; 4.5 watts/ft)
 - H - High Output
(750 lumens/ft; 6 watts/ft)
- ⑥ **LED CCT** (All CRI 90+)
 - 27 - 2700k
 - 30 - 3000k
 - 35 - 3500k
 - 40 - 4000k
 - 50 - 5000k
 - 00 - Color Switchable
(Only available with high output with touch sensor & CCT Sync accessory)
- ⑦ **Drivers**
 - V - 100-277VAC 0-10 Dimmable
 - E - 100-277VAC ELV Dimmable
 - N - 100-277VAC Non Dimming
(Mirrors with touch sensors have to use a non-dimming driver)
- ⑧ **Mounting**
 - 1 - Vertical
 - 2 - Horizontal
- ⑨ **Frame Colors**
 - BF - Black Frame
 - SF - Silver Frame
 - GF - Gold Frame
 - WF - White Frame
 - BR - Bronze Frame
 - CF - Custom Frame
(Specify color on website)
- ⑩ **Accessories**
 - NA - None
 - TS - Touch Sensor
 - NL - Night Light
 - AF - Anti-Fog
 - CT - CCT Sync
 - AN - Anti-Fog & Night Light
 - AT - Anti-Fog & Touch Sensor
 - AL - Anti-Fog, Night Light, Touch Sensor
 - NT - Night Light & Touch Sensor
 - CN - CCT Sync & Night Light
 - CF - CCT Sync & Anti-Fog
 - CL - CCT Sync, Night Light, Anti-Fog
- Additional Custom Specification**
 - Low-Iron Glasses
 - Antimicrobial Powder Coat
 - Powder Coated Chassis
 - Custom Inset & Frosting Sizes (Up to 2")




ANTI-LIGATURE.


Color Availability:



White



Black



Silver



A 3 3 d



2700K

3000K

3500K

4000K

5000K

6000K

ITEM CODE CONFIGURATION

Sample Item Code **A 3 3 d 2 4 3 6 S 3 0 N 1 W F N A**
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩



① Types

- A - Anti-Ligature

② Styles

- 33 - Double Long Side Inset Frost

③ Lighting Styles

- d - Direct Light

④ Standard Sizes

- 2030-20"x30"
- 2436-24"x36"

⑤ Outputs

- S - Standard Output
(550 lumens/ft; 4.5 watts/ft)

⑥ LED CCT (All CRI 90+)

- 27 - 2700k
- 30 - 3000k
- 35 - 3500k
- 40 - 4000k
- 50 - 5000k

⑦ Drivers

- V - 100-277VAC 0-10 Dimmable
- N - 100-277VAC Non Dimming

⑧ Mounting

- 1 - Vertical

⑨ Frame Colors

- BF - Black Frame
- WF - White Frame
- SF - Silver Frame

⑩ Accessories

- NA - None
- NL - Night Light (Circadian Rhythm Amber Color)

Additional Custom Specification

- Antimicrobial Powder Coated Frame



Sizing and Frost

- Minimum Size: 18" x 24"
- Maximum Size: 60" x 120"
- Inset Frost Size: Up to 2"

Customization

- Low-Iron Glass
- Custom Frame Finishes
- Antimicrobial Powder Coat
- Anti-Ligature Mirrors
- Powder Coat Chassis

Custom Shapes



Dual Rectangular



Hexagon



Organic



Organic



Half Moon



Build Your Own

CUSTOM MIRRORS.

Personalized Sizes and Shapes






ACCESSORIES.

Touch Sensors
CCT Wall Switch
Night Light
Demister

TOUCH SENSORS

Direct **or** Indirect Mirrors Touch Sensor Specifications


- **On/Off Dim**
 - White when lights ON
 - Orange when lights OFF
 - Hold for 2 seconds to turn off the touch sensor light
- Color Temperature switchable between **2700k to 6500k**
- **Custom LOGO** Available




Direct/ Indirect Light

Direct **and** Indirect Mirrors Touch Sensor Specifications


- **On/Off Dim**
 - White when ON
 - Orange when OFF
 - Hold for 2 seconds to turn off the touch sensor light
- Color Temperature switchable between **2700k to 6500k**
- **Custom LOGO** Available



Direct Light



Indirect Light

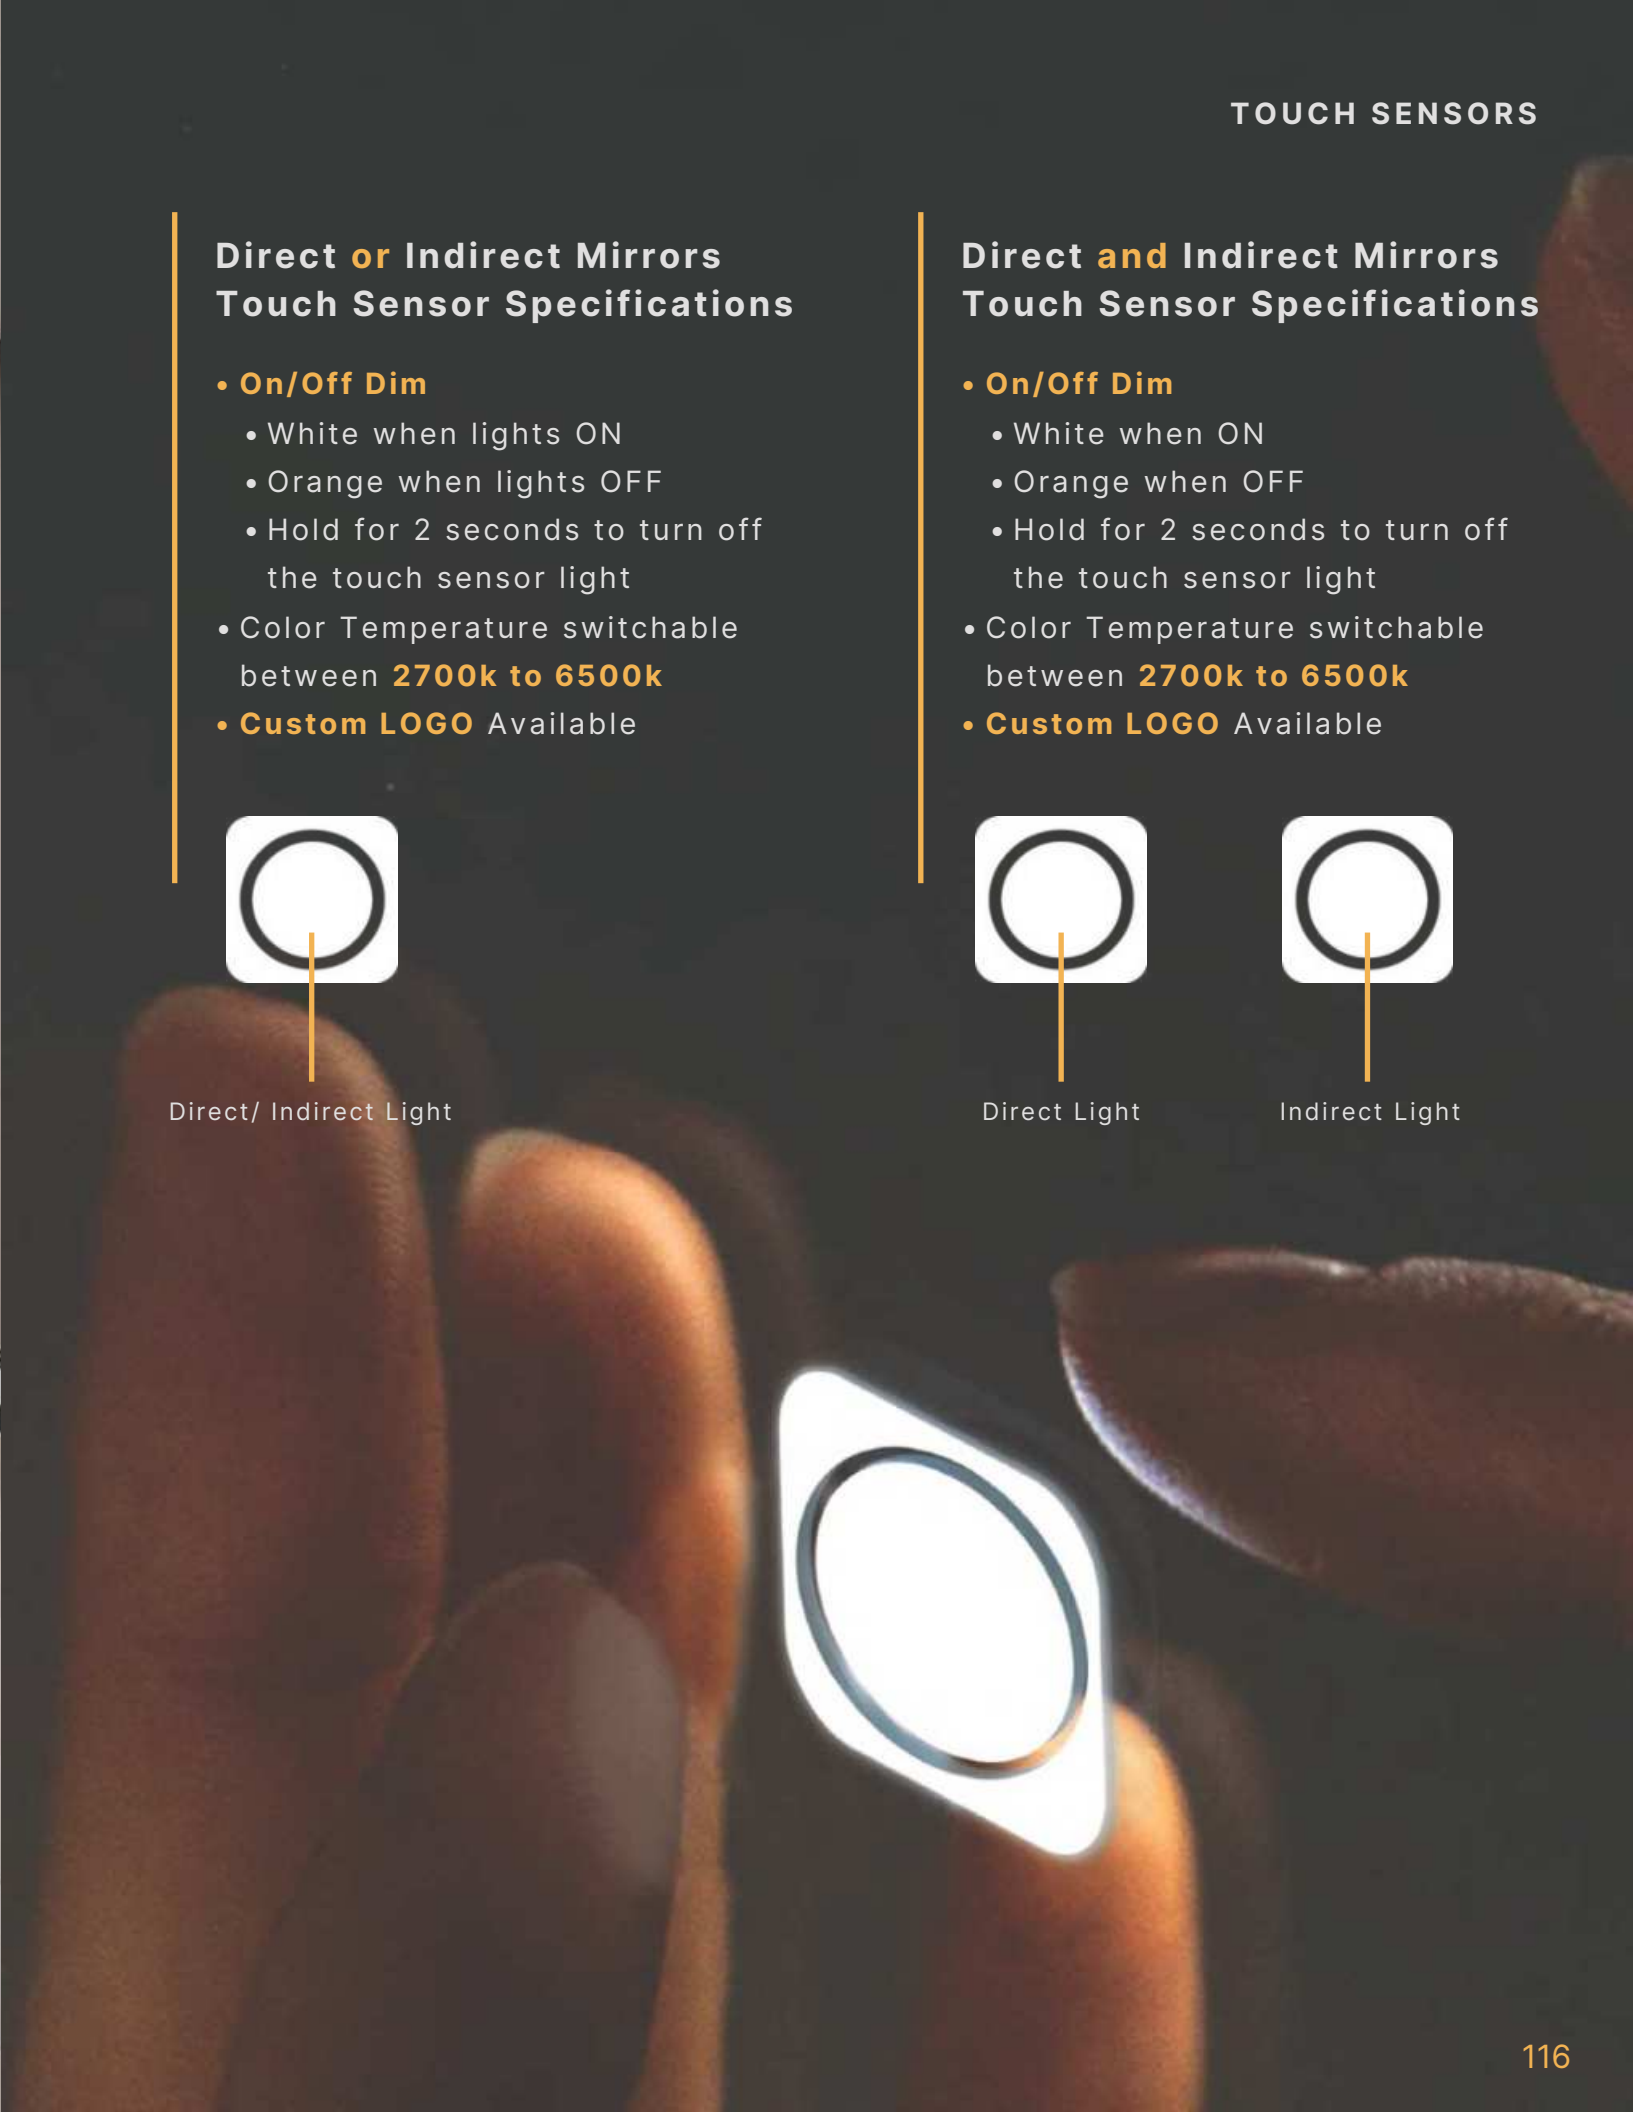




CCT SYNC

- CCT Wall Switch provides independent control of color temperature and light intensity.
- Example Item Code:
L01B2436H00N1NACT

SPECIFICATIONS

- Body Finish: White
- Dimensions:
1.7"W x 4.15"H x 0.27"D

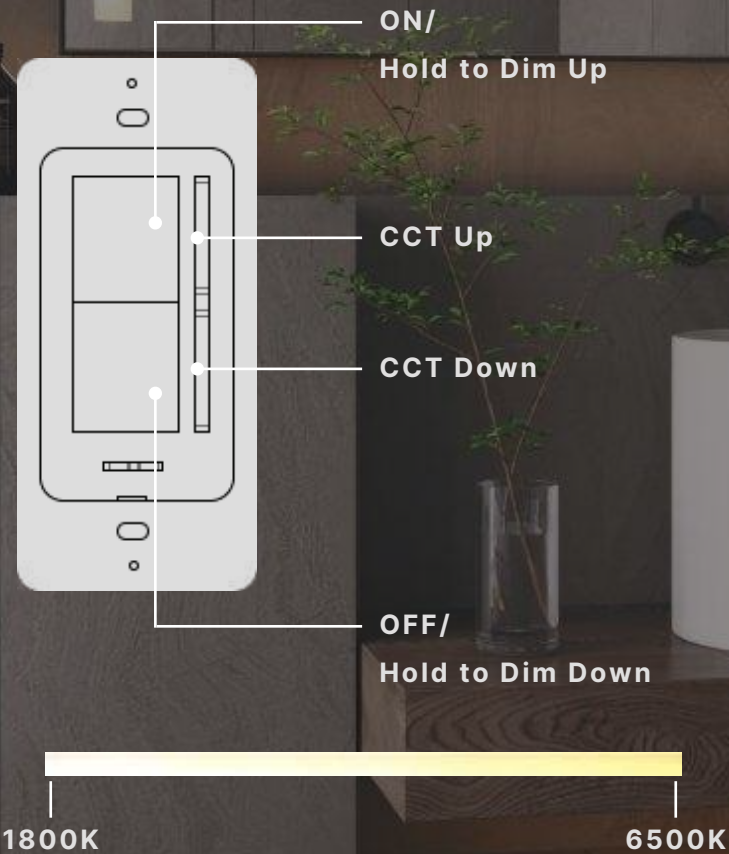

PHOTOCELL

- Each photocell contains **light sensing technology**
- Photocell **detects low-light** environments and **activates a dim LED light**
- **Automatically turns off** when high level of light is detected

Anti-Fog Demister

- Matrix Mirrors' anti-fog system ensures a **fog-free** reflection in steamy bathroom environments
- **Custom Fit**: The demister pad size is tailored to match the mirror dimensions for optimal performance
- Energy Efficient: Designed for **low energy consumption** while providing effective defogging





LATEST INNOVATIONS.

Makeup Mirror

Mirror Cabinet

Suspended Mirror

Polished Mirror

MAKEUP MIRROR

Makeup Mirror

- Built to be durable and **resistant to corrosion**, **UL listed** components.
- **Wall-mounted** configurations for easy mounting
- High color rendering index (**CRI**) of **90+** for exceptional color accuracy
- Finish Options:

-  **Brushed Nickel**
-  **Chrome**
-  **Matte Black**



Matte Black Finish



Brushed Nickel Finish



Chrome Finish

ITEM CODE CONFIGURATION

Sample Item Code **M A 2 d 0 0 1 0 S 3 0 N 1 B F N A**
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩



- | | | |
|--|--|---|
| ① Types <ul style="list-style-type: none">• MA - Makeup Mirror | ② Styles <ul style="list-style-type: none">• 2 - Full Frame Edge Frost | ③ Lighting Styles <ul style="list-style-type: none">• d - Direct Light |
| ④ Standard Sizes <ul style="list-style-type: none">• 0010 - 9.5" Diameter | ⑤ Outputs <ul style="list-style-type: none">• S - Standard Output
(550 lumens/ft; 4.5 watts/ft) | |
| ⑥ Color Temperatures <ul style="list-style-type: none">• 30 - 3000k
(90+ CRI) | ⑦ Drivers <ul style="list-style-type: none">• N - 100-277VAC Non Dimming | ⑧ Mounting <ul style="list-style-type: none">• 1 - Vertical |
| ⑨ Frame Colors <ul style="list-style-type: none">• BF - Black Frame• SF - Silver Frame• GF - Gold Frame | ⑩ Accessories <ul style="list-style-type: none">• NA - None | |

MIRROR CABINET

CA3direct
Mirror Cabinet

Upgrade your bathroom with a mirror cabinet that blends modern elegance with practical design. Built for durability and versatility, it offers both style and convenience.

- Corrosion-Resistant & **Durable** – Crafted to withstand daily use with **UL-listed** components for safety.
- Versatile Installation – Choose between **recessed** or **surface-mounted** configurations for easy installation.
- High **CRI 90+** Color Accuracy – Delivers exceptional color accuracy and clarity for a superior reflection.
- Available in **Single** or **Double Door** Styles – Designed to fit your space and storage needs.
- Infrared Sensor – **Automatically turns off the inner light** when the door is closed, adding convenience and **energy efficiency**.



2430 Single Door



2440 Single Door



3034 Double Door

2700K

3000K

3500K

4000K

5000K

6000K

ITEM CODE CONFIGURATION

Sample Item Code **CA3d2440S30NSNA**
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨



① Types

- CA - Mirror Cabinet

② Styles

- 03 - Double Long Side Inset Frost

③ Lighting Styles

- d - Direct Light

④ Standard Sizes

- Single Door
 - 2430 - 24" x 30"
 - 2440 - 24" x 40"

- Double Doors
 - 3034 - 30" x 34"

⑤ Outputs

- S - Standard Output
(550 lumens/ft; 4.5 watts/ft)

⑥ Color Temperatures (All CRI 90+)

- 27 - 2700k
- 30 - 3000k
- 35 - 3500k
- 40 - 4000k
- 50 - 5000k
- 00 - Color Switchable
(Only available with high output with touch sensor accessory)

⑦ Drivers

- E - 100-277VAC ELV Dimmable
- N - 100-277VAC Non Dimming
(Mirrors with touch sensors have to use a non-dimming driver)

⑧ Mounting

- S - Surface Mounting
- R - Recessed

⑨ Accessories

- NA - None
- TS - Touch Sensor
- AF - Anti-Fog
- AT - Anti-Fog & Touch Sensor

Additional Custom Specification

- Custom Size for Quantity Order




Suspended Mirror

S03direct & S04direct

The Matrix Mirrors Suspended Mirror provides an innovative solution for spaces where traditional wall-mounted mirrors aren't practical, such as bathrooms **with windows behind** the mirror or **rough, textured walls** that prevent secure mounting.

- S03D Double Long Side **Inset** Frost & S04D Double Long Side **Edge** Frost
- Built to be durable and **resistant to corrosion**, **UL listed** components
- **High color rendering index (CRI) of 90+** for exceptional color accuracy
- Thin frame option available



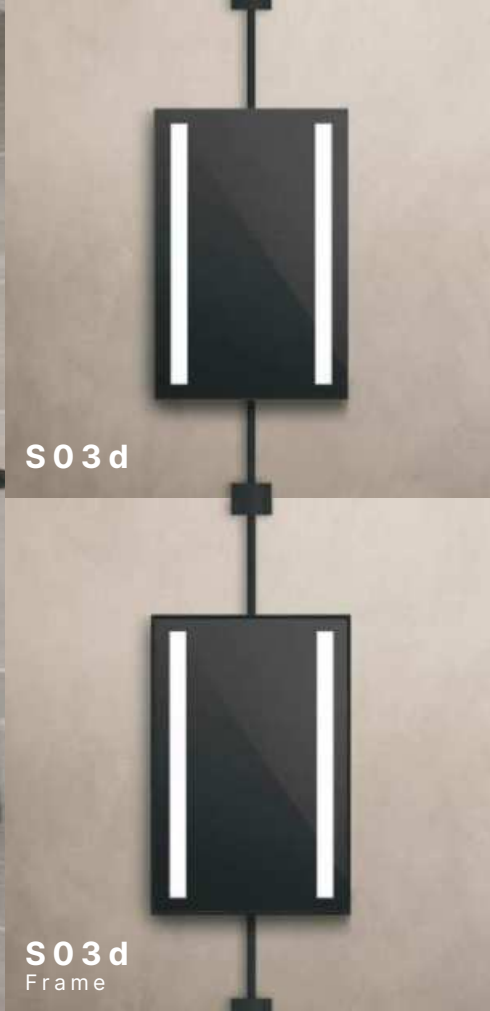

2700K 3000K 3500K 4000K 5000K 6000K 2700K 3000K 3500K 4000K 5000K 6000K

ITEM CODE CONFIGURATION

Sample Item Code S 0 3 d 2 4 4 8 S 3 0 N 1 S F N A



- ① Types

 - S - Suspended Mirror
- ② Styles

 - 03 - Double Long Side Inset Frost
- ③ Lighting Styles

 - d - Direct Light
- ④ Standard Sizes

 - 2436-24"x36"
 - 2448-24"x48"
 - 3042-30"x42"
 - 3048-30"x48"
 - 3060-30"x60"
 - 3072-30"x72"
 - Custom (Ex: 3173-31.4"x72.5")
(Specify the accurate size in additional custom specification notes)
- ⑤ Outputs

 - S - Standard Output
(550 lumens/ft; 4.5 watts/ft)
 - H - High Output
(750 lumens/ft; 6 watts/ft)
- ⑥ LED CCT (All CRI 90+)

 - 27 - 2700k
 - 30 - 3000k
 - 35 - 3500k
 - 40 - 4000k
 - 50 - 5000k
 - 00 - Color Switchable
(Only available with high output with touch sensor & CCT Sync accessory)
- ⑦ Drivers

 - V - 100-277VAC 0-10 Dimmable
 - E - 100-277VAC ELV Dimmable
 - N - 100-277VAC Non Dimming
(Mirrors with touch sensors have to use a non-dimming driver)
- ⑧ Mounting

 - 1 - Vertical
 - 2 - Horizontal
- ⑨ Frame Colors (Only for Framed Mirrors)

 - BF - Black Frame
 - GF - Gold Frame
 - SF - Silver Frame
 - WF - White Frame
 - BR - Bronze Frame
 - CF - Custom Frame
(Specify color on website)
- ⑩ Accessories

 - NA - None
 - TS - Touch Sensor
 - AF - Anti-Fog
 - NL - Night Light
 - AN - Anti-Fog & Night Light
 - AT - Anti-Fog & Touch Sensor
 - NT - Night Light & Touch Sensor
 - AL - Anti-Fog, Night Light, Touch Sensor

Additional Custom Specification

- Low-Iron Glasses
- DIY Touch Sensor Icons
- Antimicrobial Powder Coat
- Powder Coated Chassis
- CT - CCT Sync Switch (Only for 00 Color Temperature)
- Custom Inset & Frosting Sizes (Up to 2")

ITEM CODE CONFIGURATION

Sample Item Code S 0 4 d 2 4 4 8 S 3 0 N 1 G F N A



- ① Types

 - S - Suspended Mirror
- ② Styles

 - 04 - Double Long Side Edge Frost
- ③ Lighting Styles

 - d - Direct Light
- ④ Standard Sizes

 - 2436-24"x36"
 - 2448-24"x48"
 - 3042-30"x42"
 - 3048-30"x48"
 - 3060-30"x60"
 - 3072-30"x72"
 - Custom (Ex: 3173-31.4"x72.5")
(Specify the accurate size in additional custom specification notes)
- ⑤ Outputs

 - S - Standard Output
(550 lumens/ft; 4.5 watts/ft)
 - H - High Output
(750 lumens/ft; 6 watts/ft)
- ⑥ LED CCT (All CRI 90+)

 - 27 - 2700k
 - 30 - 3000k
 - 35 - 3500k
 - 40 - 4000k
 - 50 - 5000k
 - 00 - Color Switchable
(Only available with high output with touch sensor & CCT Sync accessory)
- ⑦ Drivers

 - V - 100-277VAC 0-10 Dimmable
 - E - 100-277VAC ELV Dimmable
 - N - 100-277VAC Non Dimming
(Mirrors with touch sensors have to use a non-dimming driver)
- ⑧ Mounting

 - 1 - Vertical
 - 2 - Horizontal
- ⑨ Frame Colors (Only for Framed Mirrors)

 - BF - Black Frame
 - GF - Gold Frame
 - SF - Silver Frame
 - WF - White Frame
 - BR - Bronze Frame
 - CF - Custom Frame
(Specify color on website)
- ⑩ Accessories

 - NA - None
 - TS - Touch Sensor
 - AF - Anti-Fog
 - NL - Night Light
 - AN - Anti-Fog & Night Light
 - AT - Anti-Fog & Touch Sensor
 - NT - Night Light & Touch Sensor
 - AL - Anti-Fog, Night Light, Touch Sensor

Additional Custom Specification

- Low-Iron Glasses
- DIY Touch Sensor Icons
- Antimicrobial Powder Coat
- Powder Coated Chassis
- CT - CCT Sync Switch (Only for 00 Color Temperature)
- Custom Inset & Frosting Sizes (Up to 2")

POLISHED MIRROR

Clip



Z-Bracket



J-Channel



POLISHED MIRROR

Item Code

MIRR 4880 J 2
① ② ③ ④

① Types

- MIRR - Clear Silver Mirror, 1/4" thick, pencil polish, copper-free (corrosion resistant), ANSI Z97.1 rated

② Glass Size

- Custom (Ex: 3173 - 31.4" X 72.5")
(Specify the accurate size in additional custom specifications notes)

③ Mounting

- J - J-Channels
(Color Options: Gold, Black, or Chrome)
- Z - Silver Z-Brackets
- C- Anodized Hanger Clips

④ Orientation

- 1 - Vertical
- 2 - Horizontal

⑤ Additional Custom Specification Notes

- Low-Iron Glass



HOW TO FIND US.

Contact Information and Website

SHOWROOMS

See a **display and work** directly with lighting design experts at one of our showroom partner locations. Visit matrixmirrors.com to find a showroom in your area.

REPRESENTATIVES

For **specification and distributions sales**, contact one of our sales agencies. They can assist with any project from single units to hundreds. Visit matrixmirrors.com to find your regional sales rep.



MATRIX MIRRORS SITE

(678) 580-5717

www.matrixmirrors.com

admin@matrixmirrors.com

6464 Warren Dr, Norcross, GA 30093

MATRIX[®]
M I R R O R S

MODERN • LUXURIOUS • MADE IN THE USA

(678) 580-5717

www.matrixmirrors.com

admin@matrixmirrors.com

6464 Warren Dr, Norcross, GA 30093