

PEPLINK X STARLINK ANTENNA MAX S

Instruction Guide

PEPLINK X STARLINK ANTENNA MAX S


Table of Contents

Image Guide	3
Powering on the Device	4
Wi-Fi Connection Options	5,6
Wired Ethernet Connection	7
Wi-Fi Starlink App and Updates.....	8
Peplink Portal "InControl".....	9
Magnetic Mount Installation	10

PEPLINK X STARLINK ANTENNA MAX S

Image Guide


Top View of Case:

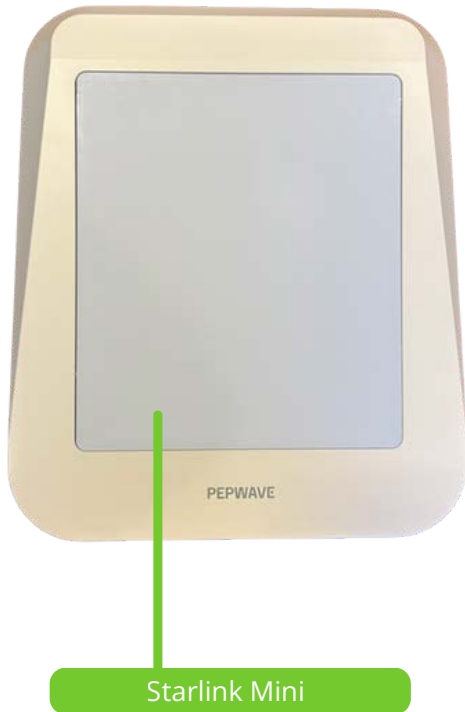

Bottom View of Case:



External Ports (Back Side of Case)

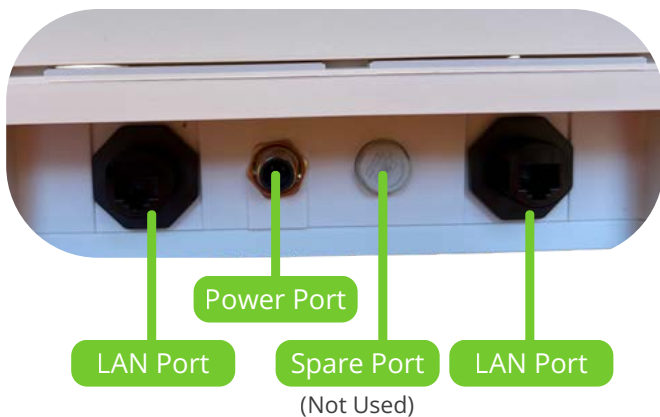

Power Cable (24V DC Cable)




PEPLINK X STARLINK ANTENNA MAX S

Powering on the Device

Step 1

The power cord has a certain orientation required to be inserted into the power port. The cord has a three-hole female connection. The power port has a three-prong male connection.

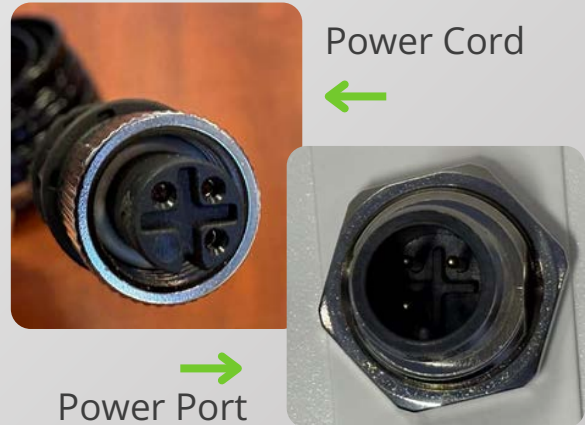

Step 2

Ensure that these connection points are aligned properly. Push the cord into the power port.



Step 3

Once the cord is fully pushed into the power port, twist the silver cap clockwise until it is tight to lock the cord in place.

Step 4

Ensure the other end of the cord is connected to a 24V DC power source.

PEPLINK X STARLINK ANTENNA MAX S

Wi-Fi Connection Options

Starlink Wi-Fi Phone Connection:

1. Ensure kit is on using previous steps
2. Go to "Settings" app
3. Click "Wi-Fi"
4. Select Kit Wi-Fi SSID
 - a. (Should look like "JobCode_StarlinkMini_LastFourSerial")
5. Enter given Wi-Fi Password
 - a. (Should look like "JobCodePeake1!")

Starlink Wi-Fi Computer Connection:

1. Ensure kit is on using previous steps
2. Click on "Internet Connection" symbol in bottom right of computer screen



3. Tap on Kit Wi-Fi
 - a. (Should look like "JobCode_StarlinkMini_LastFourSerial")
4. Enter given Wi-Fi Password
 - b. (Should look like "JobCodePeake1!")

PEPLINK X STARLINK ANTENNA MAX S

Wi-Fi Connection Options

Peplink Wi-Fi Phone Connection:

1. Ensure kit is on using previous steps
2. Go to "Settings" app
3. Click "Wi-Fi"
4. Select Kit Wi-Fi SSID
 - a. (Should look like "JobCode_Peplink_LastFourSerial")
5. Enter given Wi-Fi Password
 - a. (Should look like "JobCodePeake1!")

Peplink Wi-Fi Computer Connection:

1. Ensure kit is on using previous steps
2. Click on "Internet Connection" symbol in bottom right of computer screen



3. Tap on Kit Wi-Fi
 - a. (Should look like "JobCode_Peplink_LastFourSerial")
4. Enter given Wi-Fi Password
 - b. (Should look like "JobCodePeake1!")

PEPLINK X STARLINK ANTENNA MAX S

Wired Ethernet Connection

Step 1

Ensure the kit is powered by using the previous steps.

Step 2

Connect an ethernet cord to either of the two LAN ethernet ports on the back side of the case.



Step 3

Connect the other side of the ethernet cord to your device of choice.

Step 4

The case can utilize up to two ethernet connections at once (one in each port).

Step 5

Your device of choice should now have a wired internet connection.

PEPLINK X STARLINK ANTENNA MAX S

Wi-Fi Starlink App and Updates

Note: Through either the Starlink or Peplink phone Wi-Fi, the Starlink app can be used to get general diagnostics and information about the Starlink Mini, such as performing updates.



1. Go to App Store on phone
2. Search For “Starlink” and download
3. Ensure the phone is connected to the Starlink Mini or Peplink Wi-Fi using previous instructions
4. Open the Starlink App
5. App may say something related to “calculating orientation” or “searching for satellites”. Leave device on for 15 minutes to allow kit to connect to satellites fully.
 - a. If this takes an extended period, ensure the device has a clear view of the sky and has no obstructions such as buildings or trees.
6. Once done connecting, App will say “Online”
7. If any updates needed, an icon will show on the main screen saying something online with “downloading update” or “ready to update”
8. Follow steps given in app to update the Starlink Mini. *Note: updates may require Starlink to go offline temporarily. You may need to reconnect to Wi-Fi afterwards.*

PEPLINK X STARLINK ANTENNA MAX S

Peplink Portal “InControl”

The InControl portal is available with your Peplink device. Through this portal, specific configurations and formats of the Peplink can be edited.

The InControl portal can be accessed locally through one of the wired LAN ports or virtually online.

For more information on the InControl portal, feel free to contact PEAKE support at 1-800-719-4603.

PEPLINK X STARLINK ANTENNA MAX S

Magnetic Mount Installation

Step 1

Flip the Pepwave Antenna Max S over to access the 6 mounting points for the 6 neodymium magnet screw in mounts.

Step 2

Screw each feet in without over torquing the screws.



Step 3

Verify each foot is level with each other and making solid contact with the surface.