## **DURACELL®**

## **Zinc Air Battery**

Typical air access window located top and bottom

26.5 mm

24.6


41.9 mm

44.5 mm

Nominal Voltage:	8.4 V
Rated Capacity:	1,500 mAh at 1,300 ohm to 6.0 V at 21°C (70°F)
Nominal Internal Impedance:	12 ohm @ 1kHz
Average Weight:	34.03 gm
Volume:	17.86 cm <sup>3</sup>
Terminals:	Snap
Operating Temperature Range:	0°C to 50°C (32°F to 122°F)
ANSI: IEC:	7004 Z

146X

## Typical Discharge Characteristics at 21°C (70°F)

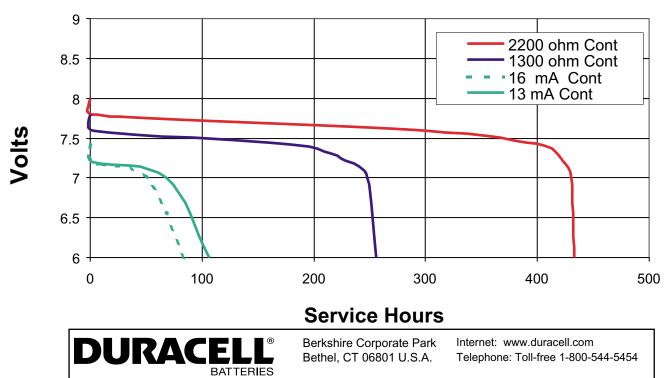

<sup>\*</sup> Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy / service life that the battery will provide for various load conditions.