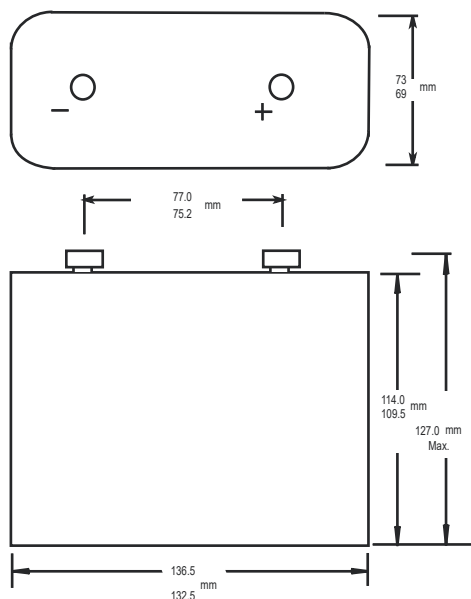


DURACELL®

MN918
Size: Lantern (4LR25-2)


Alkaline-Manganese Dioxide Battery

 Zn/MnO_2 


Dimensions shown are IEC/ANSI standards

Nominal Voltage:	6 V
Nominal Internal Impedance:	330 m-ohm @ 1kHz
Average Weight:	1310 gm (46 oz.)
Volume:	1074 cm ³ (65.5 in. ³)
Terminals:	Screw Caps
Operating Temperature Range:	-20°C to 54°C (-4°F to 130°F)
ANSI:	918A
IEC:	4LR25-2

Typical Discharge Characteristics at 21°C (70°F)

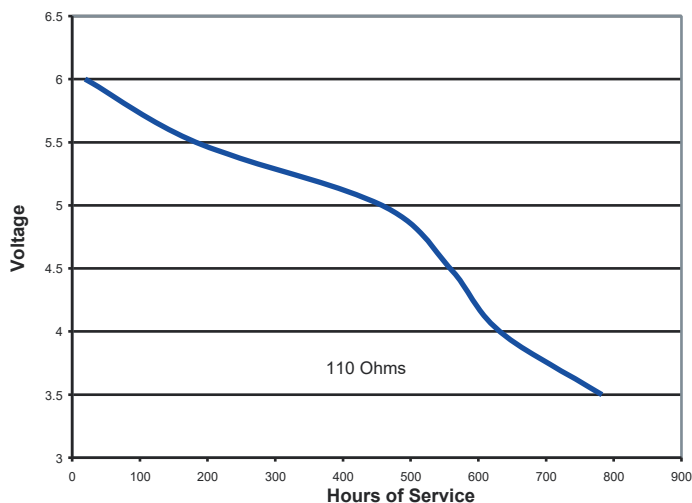

Typical Discharge Characteristics at 21°C (70°F)

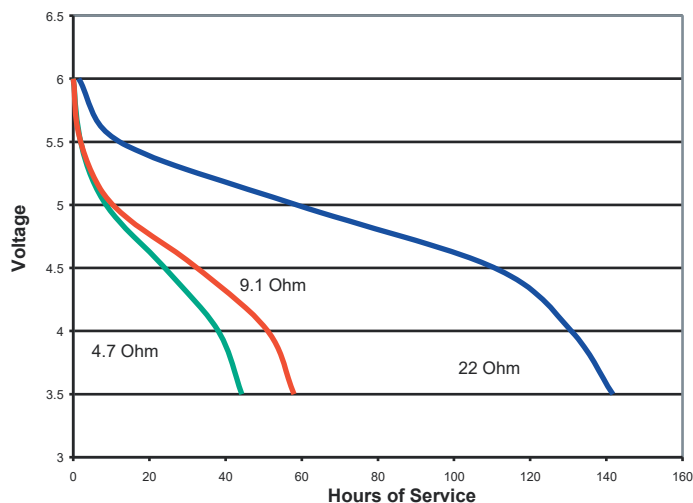

DURACELL®
BATTERIES

Berkshire Corporate Park
Bethel, CT 06801 U.S.A.
Telephone: Toll-free 1-800-544-5454
Internet: www.duracell.com

* Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy / service life that the battery will provide for various load conditions.

This data is subject to change. Performance information is typical. Contact Duracell for the latest information

6/08

UAC