





| | |
|------------------------------------|---|
| Nominal voltage | 1.5 V |
| Impedance | 136 m-ohm @ 1 kHz |
| Typical weight | 139 g (4.9 oz) |
| Typical volume | 56.4 cm ³ (3.4 in ³) |
| Terminals | Flat |
| Storage temperature range | 6°C to 29°C (42°F to 85°F) |
| Operating temperature range | -20°C to 54°C (-4°F to 130°F) |
| Designation | ANSI: 13A IEC: LR20 |

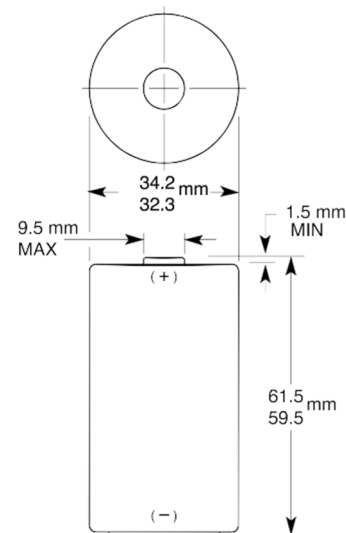


Dimensions shown are IEC standards

Coppertop D Constant Current

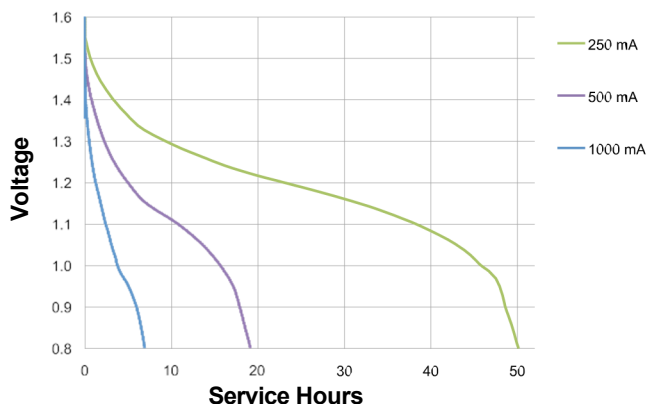





Coppertop D Constant Current

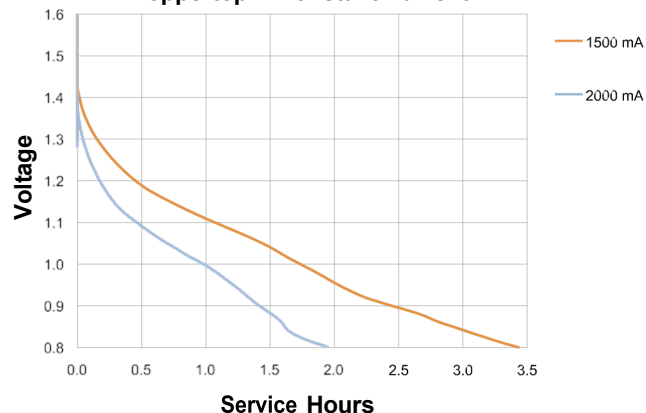

DURACELL®

A Berkshire Hathaway Company
 Berkshire Corporate Park
 Bethel, CT. 06801 U.S.A.
 Telephone: Toll-free 1-800-544-5454
www.duracell.com

Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy/service life that the battery will provide for various load conditions.

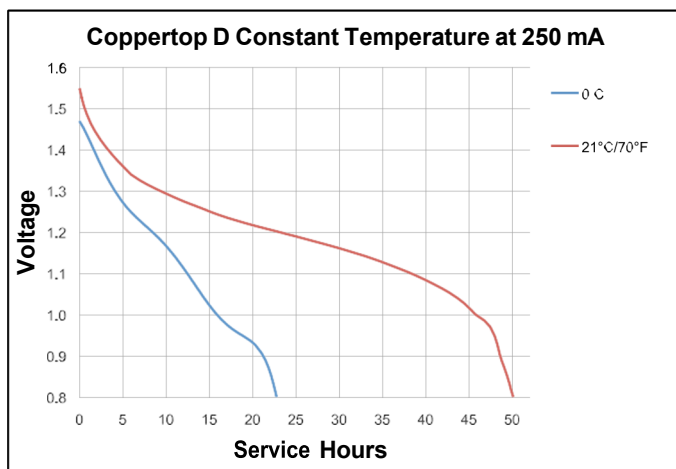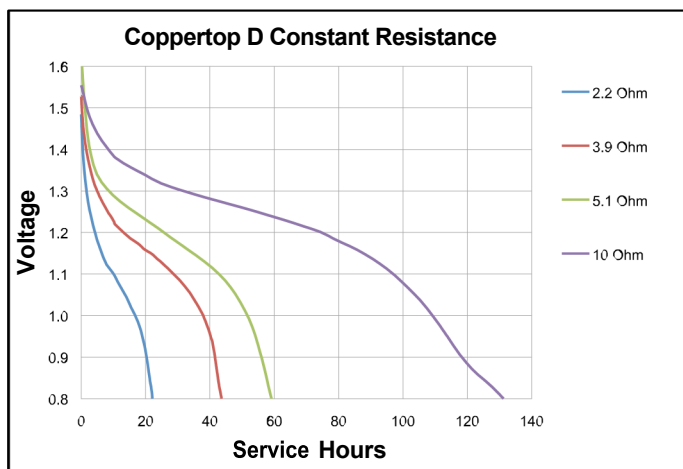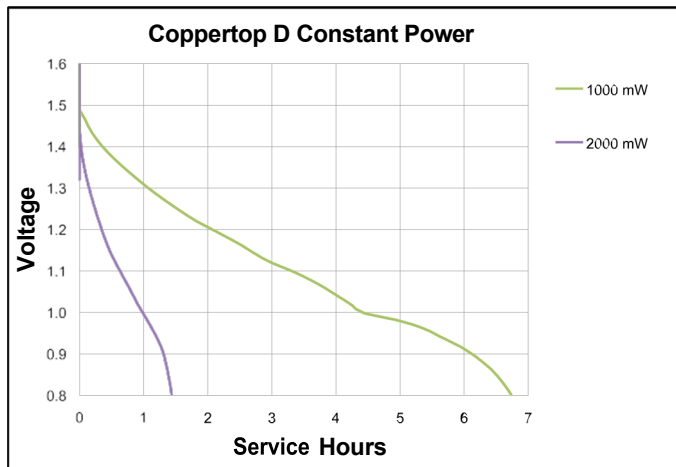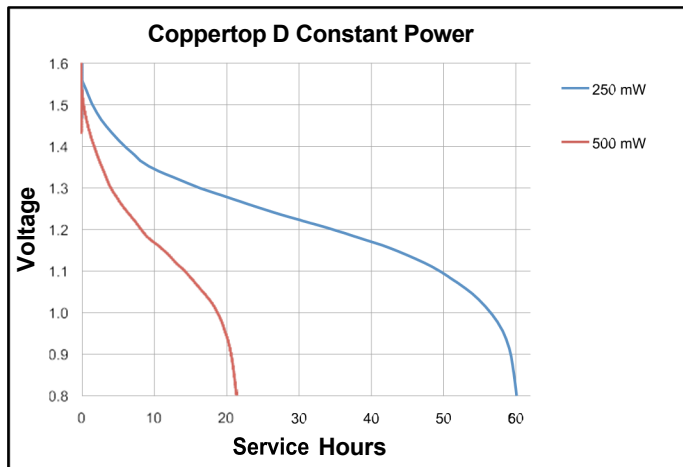

DURACELL[®]

A Berkshire Hathaway Company
 Berkshire Corporate Park
 Bethel, CT. 06801 U.S.A.
 Telephone: Toll-free 1-800-544-5454
www.duracell.com

Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy/service life that the battery will provide for various load conditions.