

# DURACELL®

## MN1604


### Size: 9V (6LP3146)

#### Alkaline-Manganese Dioxide Battery



Zn/MnO<sub>2</sub>



<b>Nominal voltage</b>	9V
<b>Impedance</b>	3,050 m-ohm@1kHz
<b>Typical weight</b>	45 g (1.6oz)
<b>Volume</b>	22.8 cm <sup>3</sup> (1.4 in <sup>3</sup> )
<b>Terminals</b>	Miniature snap
<b>Storage temperature range</b>	5°C to 30°C (41°F to 86°F)
<b>Operating temperature range</b>	-20°C to 54°C (-4°F to 130°F)
<b>Designation</b>	<b>ANSI:</b> 1604A <b>IEC:</b> 6LP3146

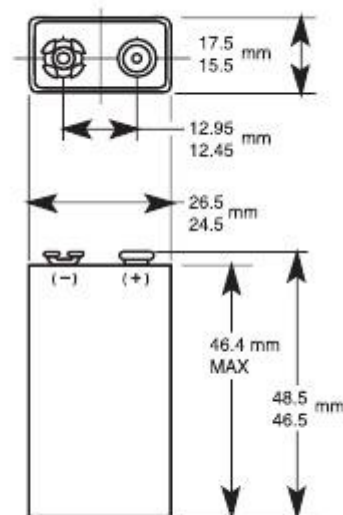

Dimensions shown are IEC standards

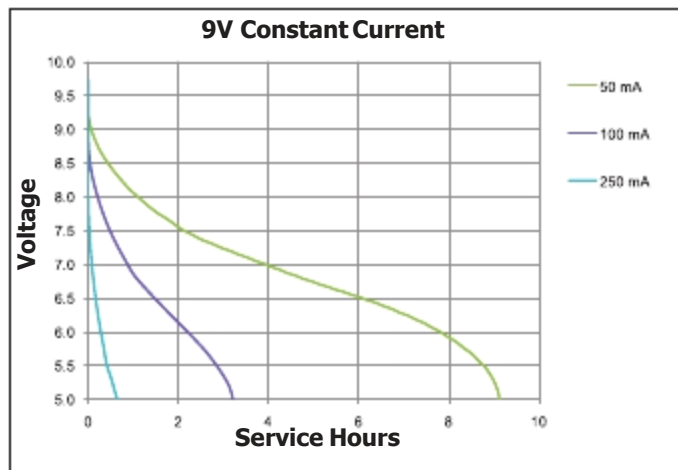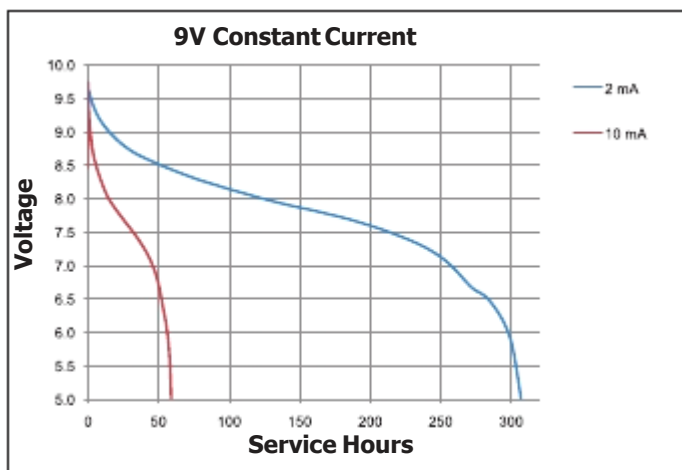

# DURACELL®

BATTERIES

Berkshire Corporate Park  
Bethel, CT. 06801 U.S.A.  
Telephone: Toll-free 1-800-544-5454  
[www.duracell.com](http://www.duracell.com)

Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy/service life that the battery will provide for various load conditions.





# DURACELL®

## MN1604

### Size: 9V (6LP3146)

### Alkaline-Manganese Dioxide Battery

Zn/MnO<sub>2</sub>

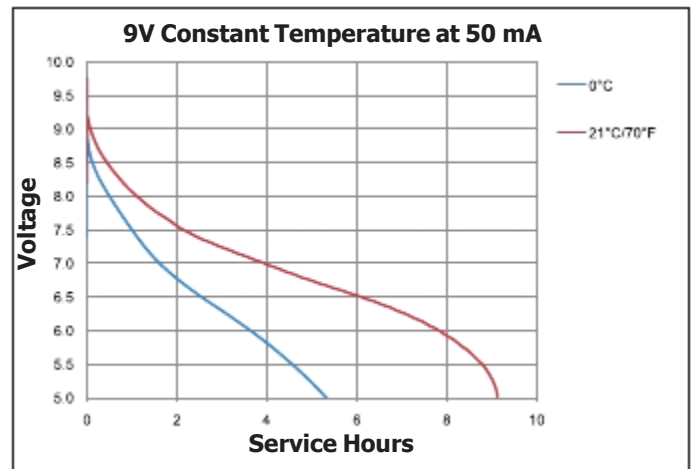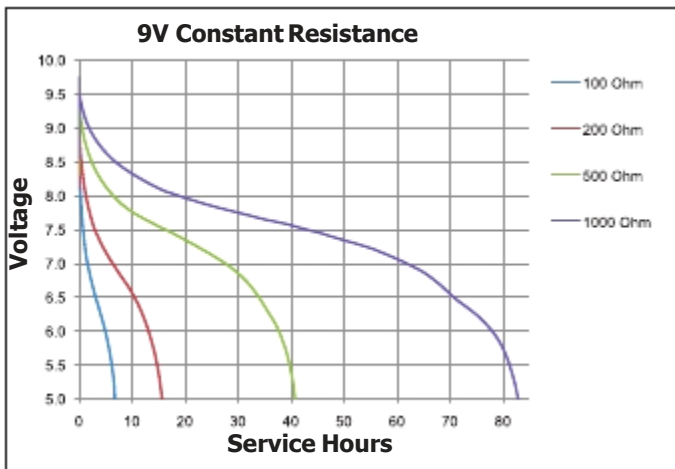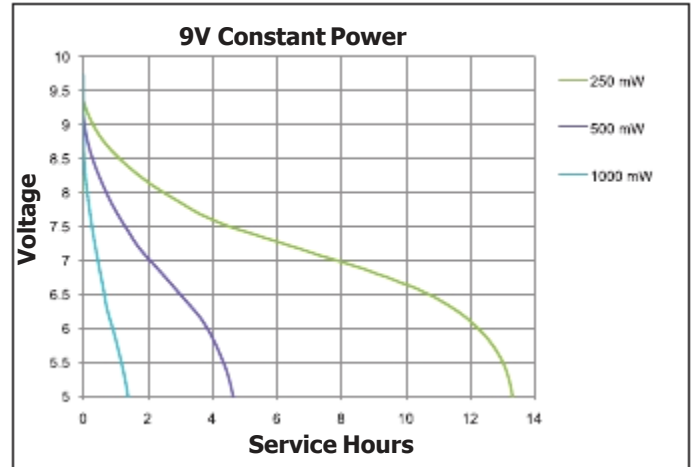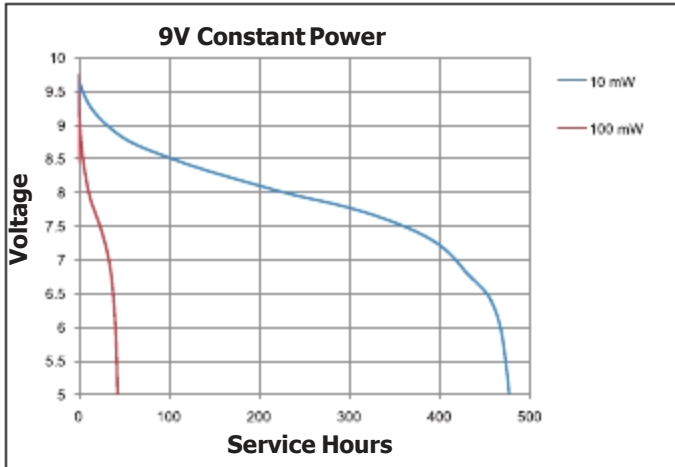

# DURACELL®

BATTERIES

Berkshire Corporate Park  
Bethel, CT. 06801 U.S.A.  
Telephone: Toll-free 1-800-544-5454  
[www.duracell.com](http://www.duracell.com)

Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy/service life that the battery will provide for various load conditions.