

# DURACELL®



## COPPERTOP

### MN1604


### Size: 9V (6LR61)

Alkaline-Manganese Dioxide Battery

Zn/MnO<sub>2</sub>




|                             |                                             |
|-----------------------------|---------------------------------------------|
| Nominal voltage             | 9 V                                         |
| Impedance                   | 1,700 m-ohm @ 1 kHz                         |
| Typical weight              | 45 g (1.6 oz)                               |
| Typical volume              | 22.8 cm <sup>3</sup> (1.4 in <sup>3</sup> ) |
| Terminals                   | Miniature snap                              |
| Storage temperature range   | 5°C to 30°C (41°F to 86°F)                  |
| Operating temperature range | -20°C to 54°C (-4°F to 130°F)               |
| Designation                 | ANSI: 1604A IEC: 6LR61                      |

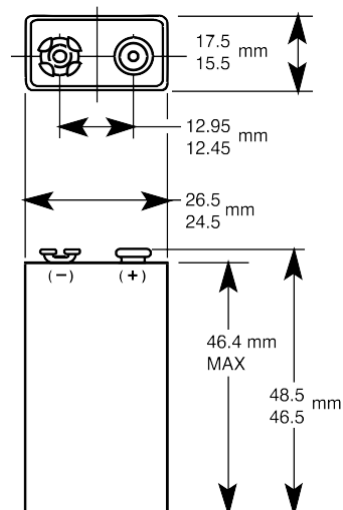


Dimensions shown are IEC standards

Coppertop 9V Constant Current

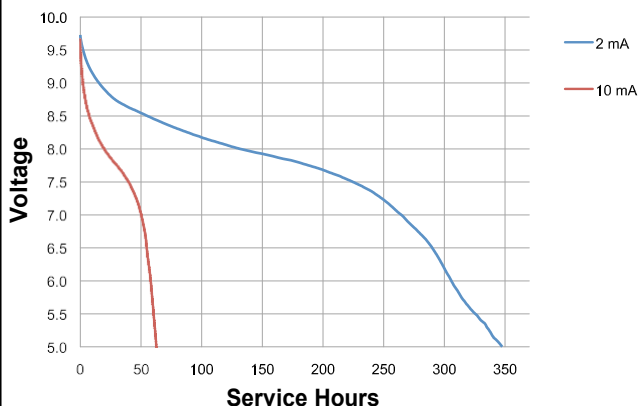

Coppertop 9V Constant Current




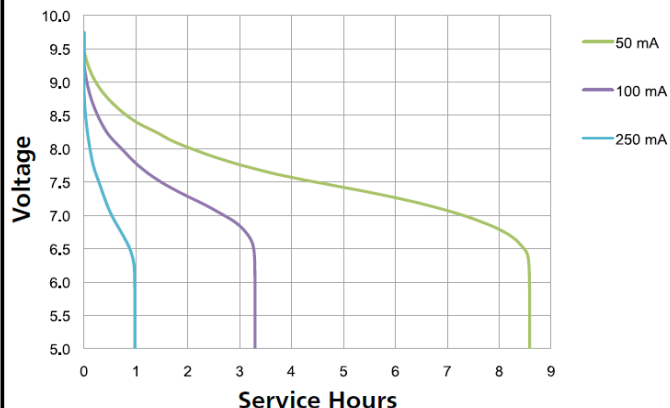


# DURACELL®

BATTERIES

Berkshire Corporate Park  
Bethel, CT. 06801 U.S.A.  
Telephone: Toll-free 1-800-544-5454  
[www.duracell.com](http://www.duracell.com)

Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy/service life that the battery will provide for various load conditions.

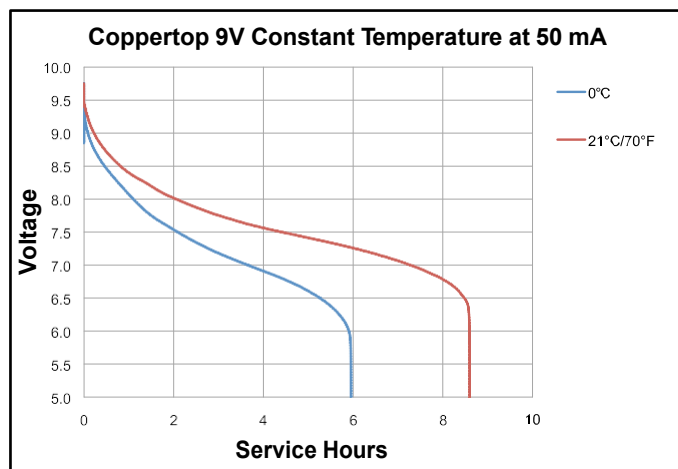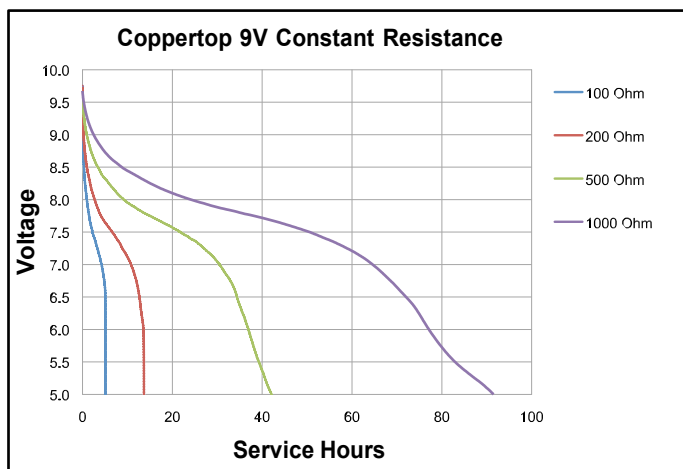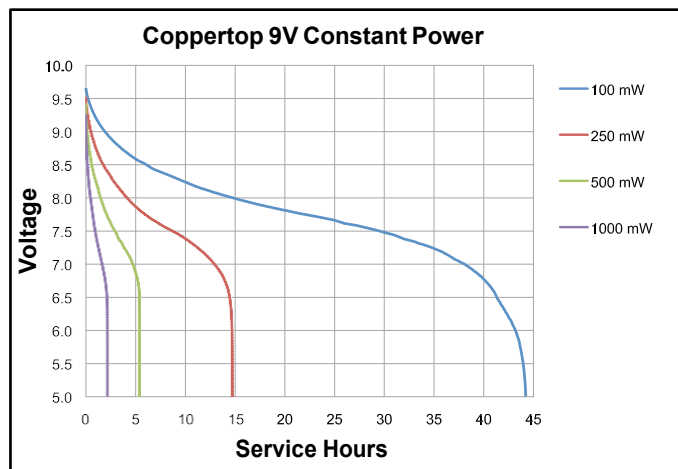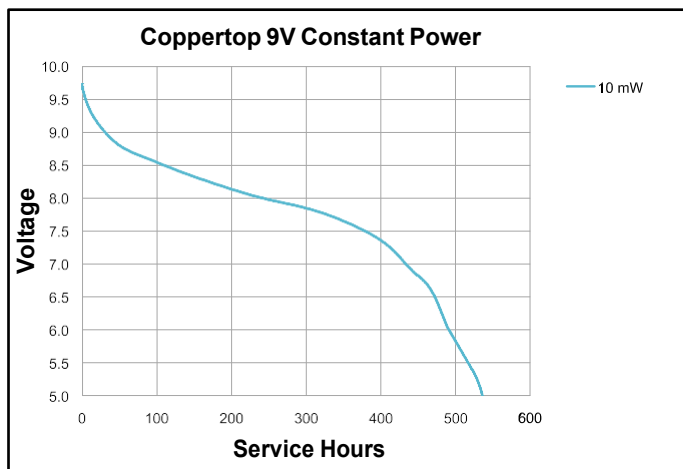

Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy/service life that the battery will provide for various load conditions.

**DURACELL®**  
 BATTERIES

Berkshire Corporate Park  
 Bethel, CT. 06801 U.S.A.  
 Telephone: Toll-free 1-800-544-5454  
[www.duracell.com](http://www.duracell.com)

