

DURACELL[®]

ULTRA



MX1500


Size: AA (LR6)

Alkaline-Manganese Dioxide Battery

Zn/MnO₂




Nominal voltage	1.5 V
Impedance	81 m-ohm @ 1 kHz
Typical weight	24 g (0.8 oz)
Typical volume	8.4 cm ³ (0.5 in ³)
Terminals	Flat
Storage temperature range	5°C to 30°C (41°F to 86°F)
Operating temperature range	-20°C to 54°C (-4°F to 130°F)
Designation	ANSI: 15A IEC: LR6

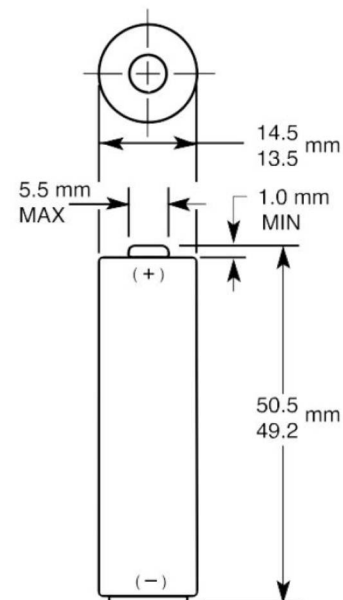


Dimensions shown are IEC standards

MX1500 AA - Constant Current (mA)

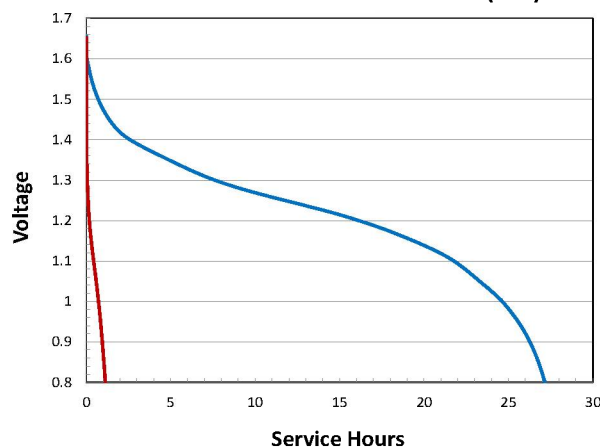

MX1500 AA - Constant Power (mW)

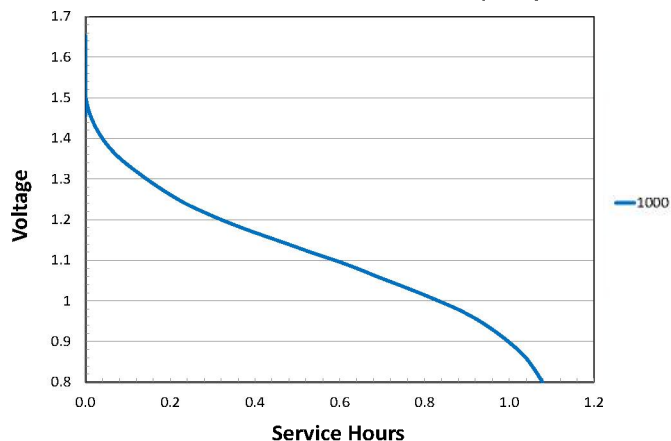

DURACELL[®]

BATTERIES

Berkshire Corporate Park
Bethel, CT. 06801 U.S.A.
Telephone: Toll-free 1-800-544-5454
www.duracell.com

Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy/service life that the battery will provide for various load conditions.

DURACELL[®] ULTRA




MX1500 Size: AA (LR6)


Alkaline-Manganese Dioxide Battery

Zn/MnO₂

MX1500 AA - Constant Resistance (Ohms)

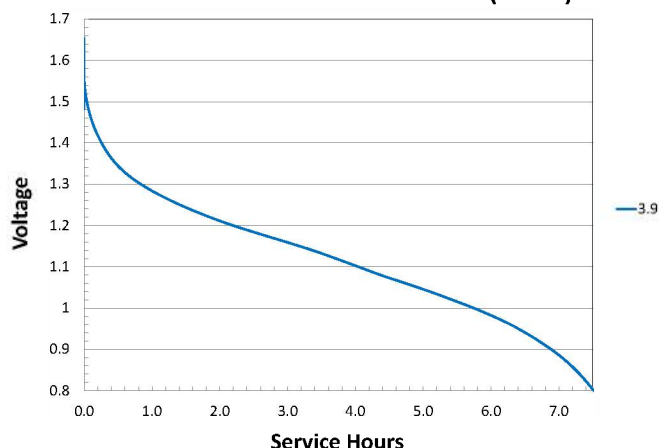

MX1500 AA - 3.9 Ohms at 1 Hour/Day

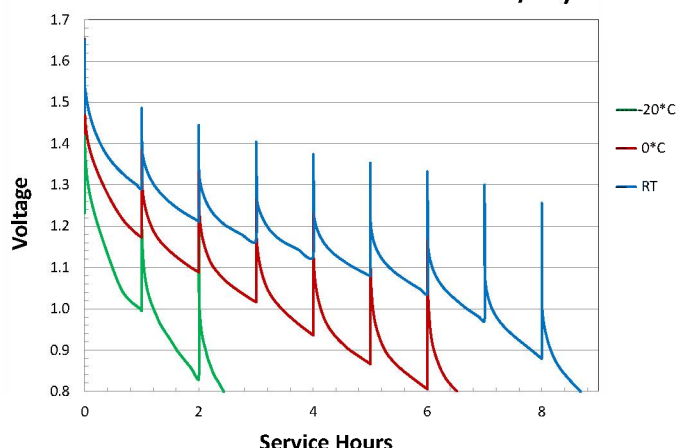

DURACELL[®] BATTERIES

Berkshire Corporate Park
Bethel, CT. 06801 U.S.A.
Telephone: Toll-free 1-800-544-5454
www.duracell.com

Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy/service life that the battery will provide for various load conditions.