


Nominal Voltage:	1.5 V
Operating Voltage	1.6 - 0.75V
Impedance:	150 m-ohm @ 1kHz
Typical Weight:	69 gm (2.4 oz.)
Typical Volume:	26.9 cm <sup>3</sup> (1.6 in. <sup>3</sup> )
Terminals:	Flat
Storage Temperature Range:	-20 °C to 35 °C
Operating Temperature Range:	-20 °C to 54 °C (-4 °F to 130 °F)
ANSI: IEC:	14A LR14

TYPICAL DISCHARGE CHARACTERISTICS AT 21 °C (70 °F)

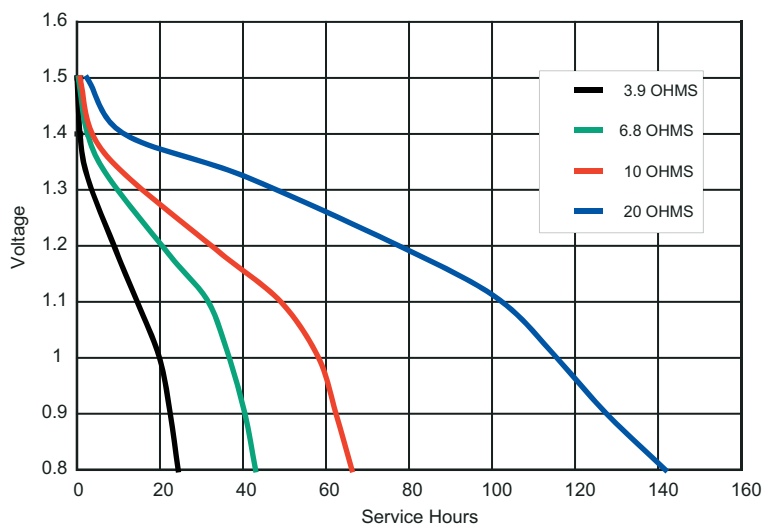


## DURACELL®

BATTERIES


Berkshire Corporate Park  
Bethel, CT 06801 U.S.A.  
Telephone: Toll-free 1-800-544-5454  
Internet: [www.duracell.com](http://www.duracell.com)

\* Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy / service life that the battery will provide for various load conditions.


TYPICAL DISCHARGE CHARACTERISTICS  
AT 21°C (70°F)

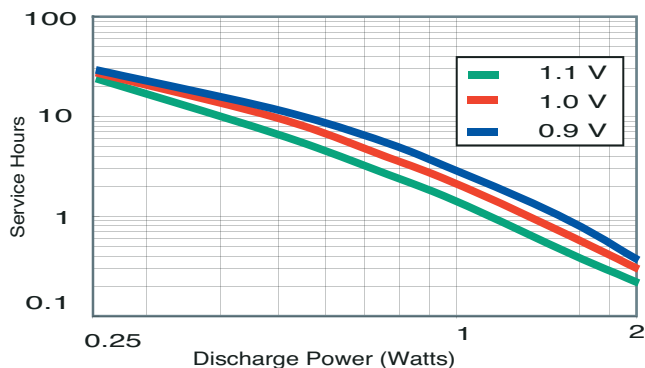


TYPICAL DISCHARGE CHARACTERISTICS  
AT 21°C (70°F)

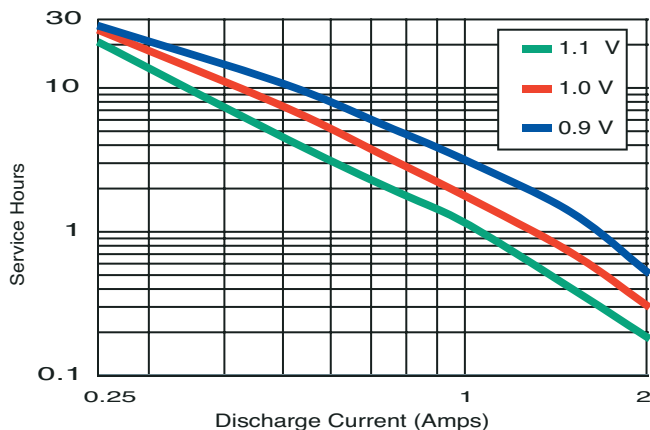


TYPICAL DISCHARGE CHARACTERISTICS  
AT 21°C (70°F)

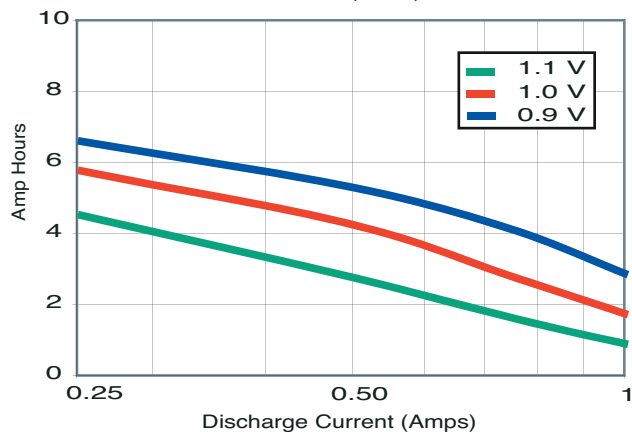

TYPICAL DISCHARGE CHARACTERISTICS  
AT 21°C (70°F)

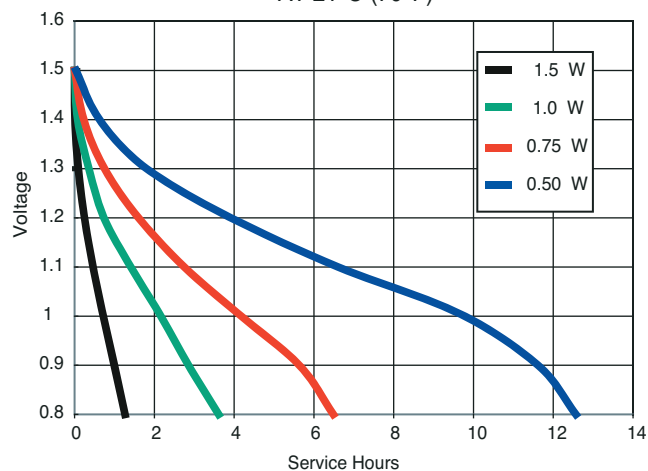

TYPICAL FLASHLIGHT TEST  
AT 21°C AND 0°C

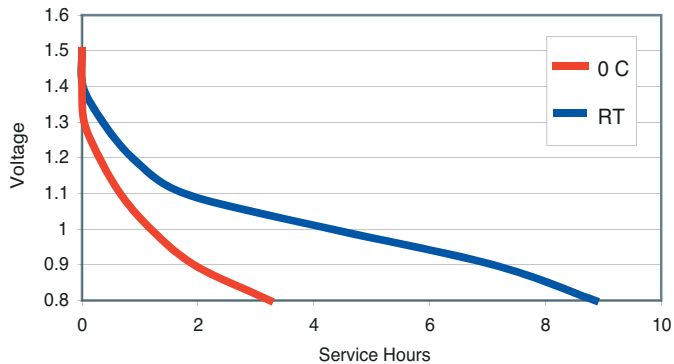

**DURACELL®**  
BATTERIES

Berkshire Corporate Park  
Bethel, CT 06801 U.S.A.  
Telephone: Toll-free 1-800-544-5454  
Internet: [www.duracell.com](http://www.duracell.com)

\* Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy / service life that the battery will provide for various load conditions.