


Nominal Voltage:	6 V
Typical Voltage:	6.4-6.6 V
Nominal Internal Impedance:	0.4 ohm @ 1kHz
Average Weight:	38 gm
Typical Volume:	22.6 cm ³
Terminals:	Flat, Recessed Contacts Nickel Plated Steel
Operating Temperature Range:	-20°C to 75°C (-4°F to 167°F)
NEDA/ANSI:	5024LC
IEC:	CR-P2

Delivered Energy vs. Power Drain
@ Various Cutoff Voltage - Room Temperature

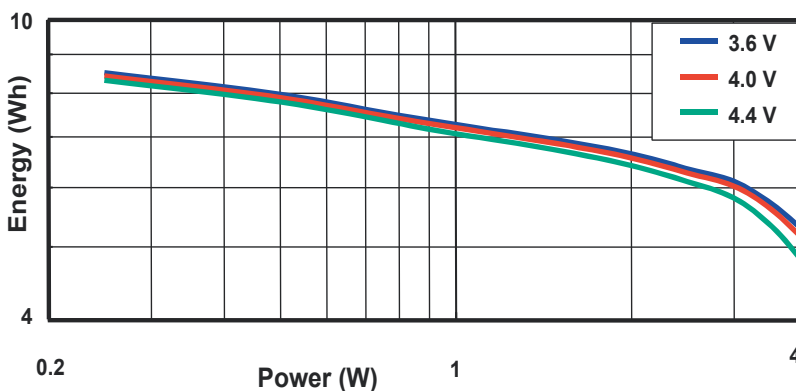


Duracell Ultra 223 Typical Performance

35mm Point & Shoot Camera
1.2A, 3 sec on 7sec off, cont.
to 3.6 V @ 20°C


35mm SLR Photo
1.8A, 3 sec on 7sec off, cont.
to 3.6 V @ 20°C

Photo
0.9A, 3 sec on 27sec off, cont.
to 3.6 V @ 20°C

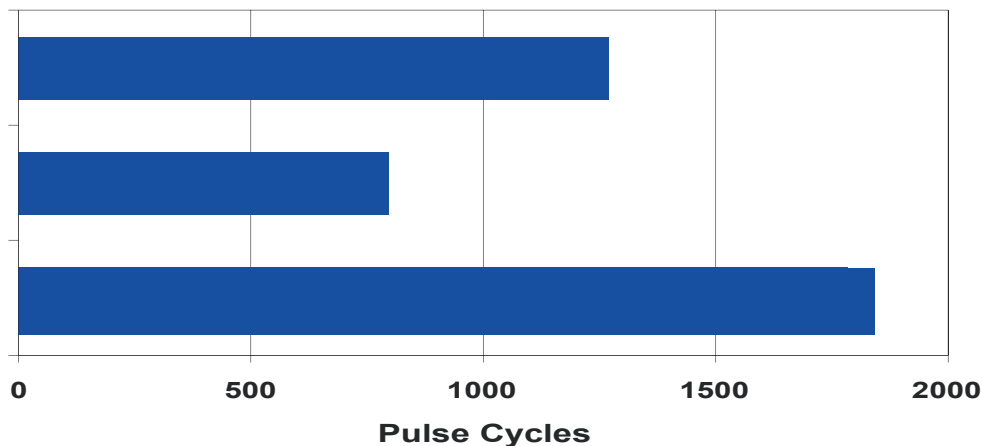


* Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy / service life that the battery will provide for various load conditions.


1.2 Amp, 3 sec on/ 7 sec off
@ Various Temperatures

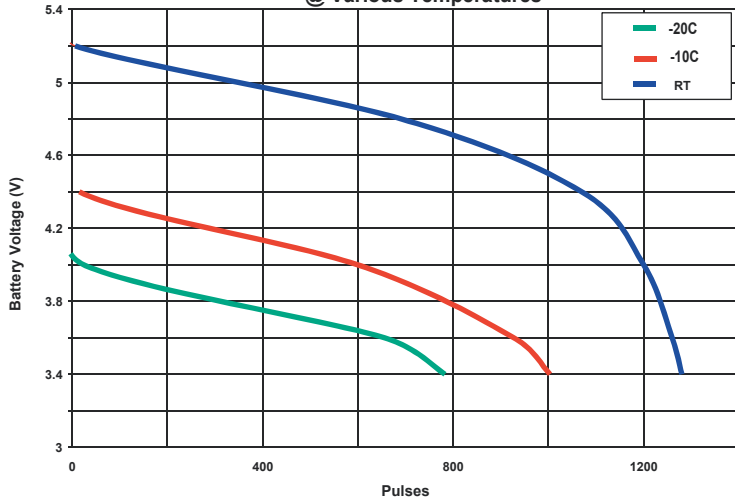


1.8 Amp 3 sec on/ 7 sec off
@ Various Temperatures

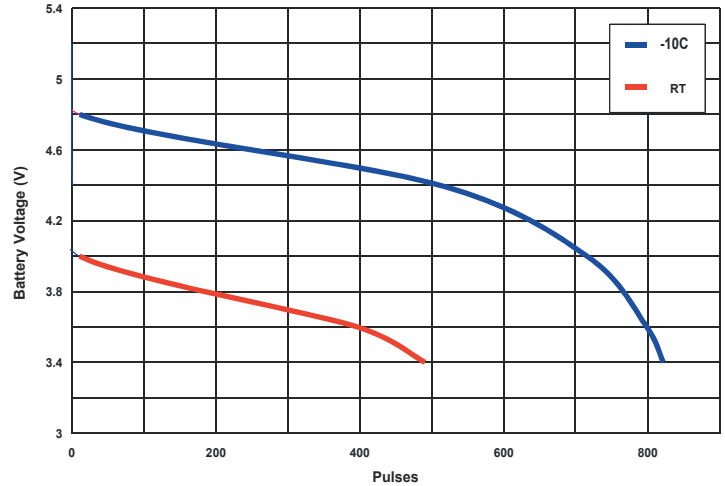

Continuous Discharge
RT to 3.4 Volts

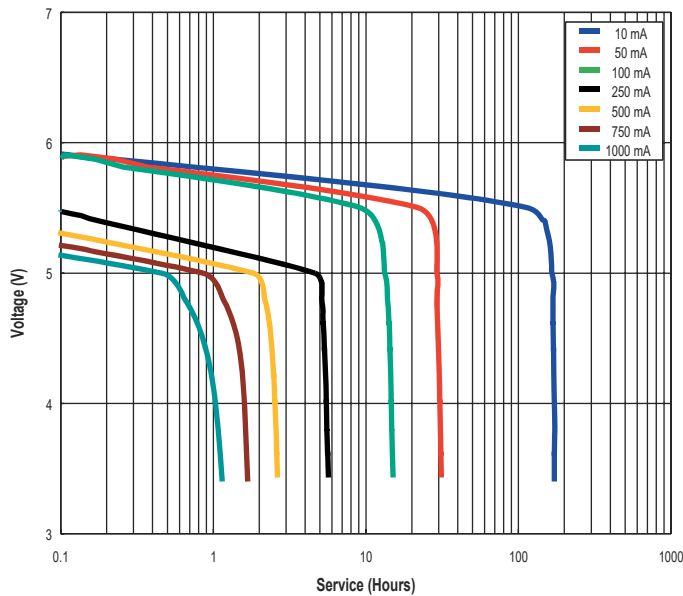

0.9 Amp, 3 sec on/27 sec off
@ Various Temperatures

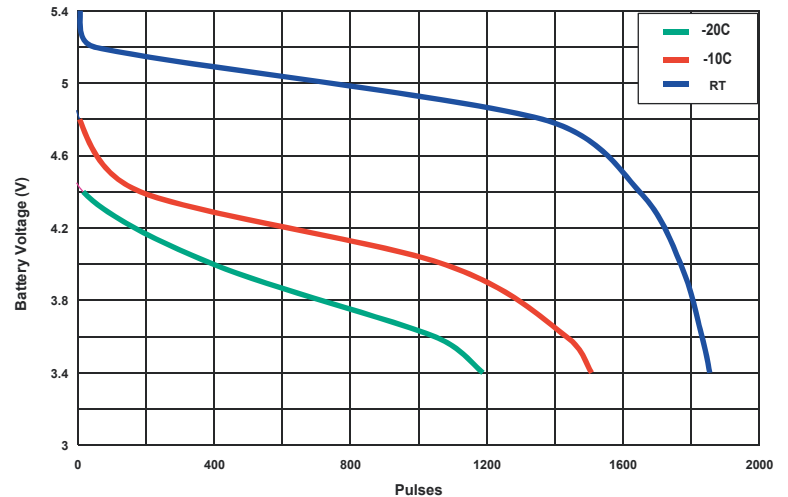

DURACELL®

BATTERIES

Berkshire Corporate Park
Bethel, CT 06801 U.S.A.
Telephone: Toll-free 1-800-544-5454
Internet: www.duracell.com

* Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy / service life that the battery will provide for various load conditions.