
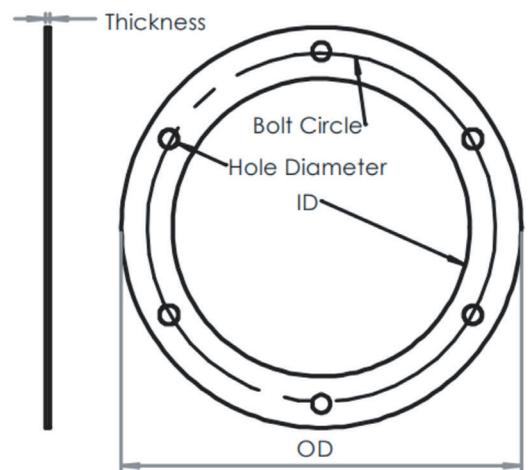


ANGLE FLANGE GASKET

The standard black nitrile gasket is used to fill microscopic spaces between flange faces creating air, dust, or gas tight seals to guarantee superior air flow and smooth transitions. One gasket per joint.

	Øin.	ID in.	OD in.	Width	Thickness		QTY Holes	Holes Ø in.	Bolt Circle in.
					Nitrile	Silicone			
*	3	3.06	5.06	1	0.1875	0.125	6	9/32	4.31
	4	4.06	6.06	1	0.1875	0.125	6	9/32	5.31
*	5	5.06	7.06	1	0.1875	0.125	6	9/32	6.31
	6	6.09	8.59	1.25	0.1875	0.125	6	9/32	7.31
*	7	7.13	9.63	1.25	0.1875	0.125	6	3/8	8.50
	8	8.13	10.63	1.25	0.1875	0.125	6	3/8	9.56
*	9	9.13	11.63	1.25	0.1875	0.125	6	7/16	10.63
	10	10.13	12.63	1.25	0.1875	0.125	6	7/16	11.81
*	11	11.13	13.63	1.25	0.1875	0.125	6	7/16	12.75
	12	12.13	15.13	1.5	0.1875	0.125	8	7/16	14.00
*	13	13.13	16.13	1.5	0.1875	0.125	8	7/16	15.00
*	14	14.13	17.13	1.5	0.1875	0.125	8	7/16	16.00
*	15	15.13	18.13	1.5	0.1875	0.125	8	7/16	17.00
*	16	16.13	19.13	1.5	0.1875	0.125	8	7/16	18.00
*	17	17.13	20.13	1.5	0.1875	0.125	8	7/16	19.00
*	18	18.13	21.13	1.5	0.1875	0.125	8	7/16	20.00
**	19	19.13	22.13	1.5	0.1875	0.125	12	7/16	20.75
*	20	20.13	23.13	1.5	0.1875	0.125	12	7/16	21.75
**	21	21.13	24.13	1.5	0.1875	0.125	12	7/16	22.75
*	22	22.13	25.13	1.5	0.1875	0.125	12	7/16	23.75
**	23	23.13	26.13	1.5	0.1875	0.125	12	7/16	24.88
*	24	24.13	27.13	1.5	0.1875	0.125	12	7/16	25.88
**	25	25.13	28.13	1.5	0.1875	0.125	16	7/16	26.88
**	26	26.13	30.13	2	0.1875	0.125	16	7/16	28.38
**	27	27.13	31.13	2	0.1875	0.125	16	7/16	29.38
**	28	28.13	32.13	2	0.1875	0.125	16	7/16	30.38
**	29	29.13	33.13	2	0.1875	0.125	16	7/16	31.38
**	30	30.13	34.13	2	0.1875	0.125	16	7/16	32.38
**	31	31.13	35.13	2	0.1875	0.125	16	7/16	33.38
**	32	32.13	36.13	2	0.1875	0.125	16	7/16	34.38
**	33	33.13	37.13	2	0.1875	0.125	16	7/16	35.38
**	34	34.13	38.13	2	0.1875	0.125	16	7/16	36.38
**	35	35.13	39.13	2	0.1875	0.125	16	7/16	37.38
**	36	36.13	40.13	2	0.1875	0.125	16	7/16	38.38
**	37	37.13	41.13	2	0.1875	0.125	24	7/16	39.38
**	38	38.13	42.13	2	0.1875	0.125	24	7/16	40.38
**	39	39.13	43.13	2	0.1875	0.125	24	7/16	41.38
**	40	40.13	44.13	2	0.1875	0.125	24	7/16	42.38
**	42	42.13	46.13	2	0.1875	0.125	24	7/16	44.38
**	44	44.13	48.13	2	0.1875	0.125	24	7/16	46.38
**	46	46.13	50.13	2	0.1875	0.125	24	7/16	48.38
**	48	48.13	52.13	2	0.1875	0.125	24	7/16	50.38
**	50	50.13	54.13	2	0.1875	0.125	24	7/16	52.38
**	52	52.13	56.13	2	0.1875	0.125	24	7/16	54.38
**	54	54.13	58.13	2	0.1875	0.125	24	7/16	56.38
**	56	56.13	60.13	2	0.1875	0.125	24	7/16	58.38
**	58	58.14	62.14	2	0.1875	0.125	32	7/16	60.38
**	60	60.13	64.13	2	0.1875	0.125	32	7/16	62.38
**	62	62.13	66.13	2	0.1875	0.125	32	7/16	64.38
**	64	64.13	68.13	2	0.1875	0.125	32	7/16	66.38
**	66	66.13	70.13	2	0.1875	0.125	32	7/16	68.38
**	68	68.13	72.13	2	0.1875	0.125	32	7/16	70.38
**	70	70.13	74.13	2	0.1875	0.125	32	7/16	72.38
**	72	72.13	76.13	2	0.1875	0.125	32	7/16	74.38

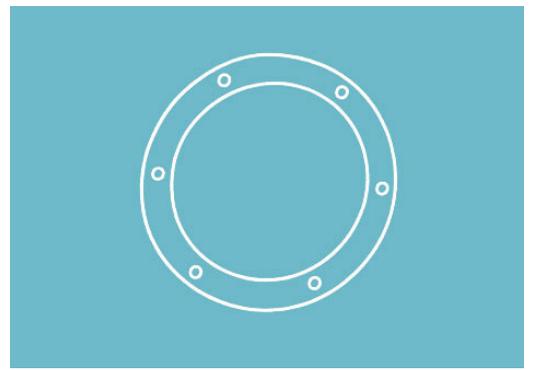

GALV		S. STEEL	
Size in		Size in	
Min Øin.	Max Øin.	Min Øin.	Max Øin.
3	72	3	72

- * silicone flange 10 days lead time
- ** both nitrile and silicone are 10 days lead time
- ** sizes 46" and above are pieced gaskets