
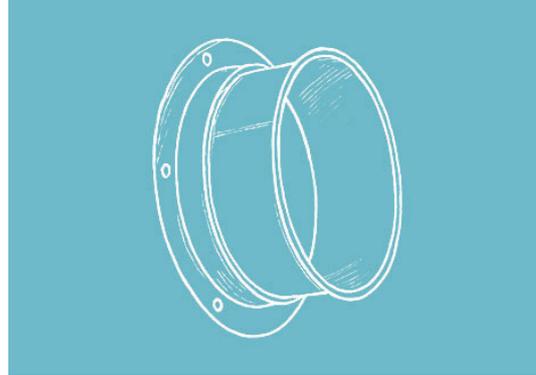


# ORIGIN DUCTWORKS

## ANGLE FLANGE ADAPTER

Our Angle Flange Adapter features the industry-standard angle flange on one end and a rolled edge on the other. This will enable quick connection between flanged and rolled-lip duct pipes or fittings. The flange is retained with a Van Stone lip, allowing for easy rotation and alignment minimizing installation time. \*This is available for custom bolt patterns, just denote Flat Flange (FFL) with required bolt pattern, otherwise will be left blank.

Øin.	Length in.	Std Weight Lbs.
3	5	1.40
4	3.5	1.70
5	3.5	2.15
6	3.5	2.55
7	3.5	3.10
8	3.5	3.15
9	3.5	3.25
10	3.5	5.00
11	3.5	5.60
12	3.5	6.15
13	5	7.02
14	5	7.70
15	5	9.25
16	5	11.05
17	5	12.90
18	5	15.20
19	5	19.15
20	5	19.15
21	5	26.05
22	5	26.05
23	5	30.00
24	5	30.00

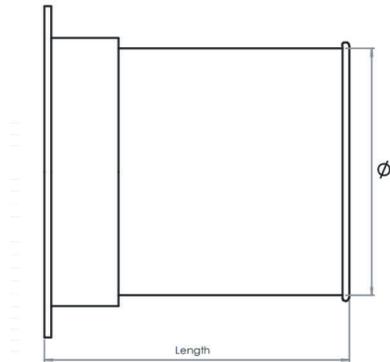

### SNAPLOCK MATERIAL OPTIONS

GALVANIZED				STAINLESS STEEL			
Gauges	Size in			Gauges	Size in		
	Min Øin.	Max Øin.			Min Øin.	Max Øin.	
STD.	22	3	12	STD.	22	3	12
	20	13	24		20	13	24
OPT.	18	4	24	OPT.	18	8	24
	16	8	24		16	8	24
	14	8	24				

### FLANGED MATERIAL OPTIONS

GALVANIZED				STAINLESS STEEL			
Gauges	Size in			Gauges	Size in		
	Min Øin.	Max Øin.			Min Øin.	Max Øin.	
STD.	22	3	12	STD.	22	3	12
	20	13	40		20	13	40
OPT.	18	4	40	OPT.	18	8	40
	16	8	40		16	8	40
	14	8	50				
	12	10	72				