
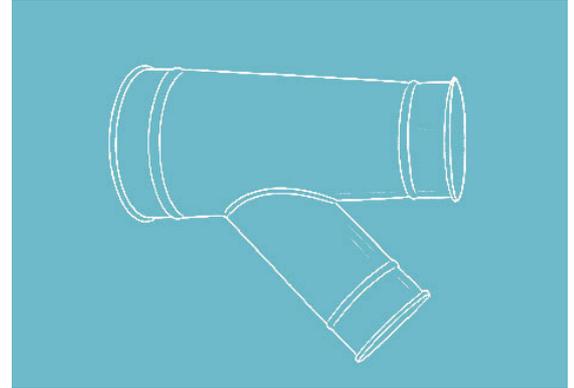


ORIGIN DUCTWORKS

BRANCH

Branches (sometimes called “wyes” or “laterals”) are standard with SNAPLOCK Rolled Ends, allowing quick connections with other SNAPLOCK ductwork.

Øin.	Length in.	Weight Lbs.	
3	QF/Raw: C×2 + 9” To manuf: A - C ≥ C - B	2.32	
4		3.00	
5		3.75	
6		4.25	
7		5.00	
8		6.00	
9		7.25	
10		8.50	
11		9.25	
12		10.75	
13		11.40	
14		13.50	
15		15.60	
16		17.56	
17		19.00	
18		21.00	
19		25.00	
20		30.00	
21		35.00	
22		39.50	
23		47.00	
24		53.50	
25		Angle/ Flat Flange: C×2 + 15” To manuf: A - C ≥ C - B	63.00
26			74.00
27	81.00		
28	98.00		
29	107.00		
30	117.05		
31	121.00		
32	125.94		
33	130.00		
34	134.83		
35	138.00		
36	142.78		
37	148.00		
38	153.47		
39	158.00		
40	162.81		

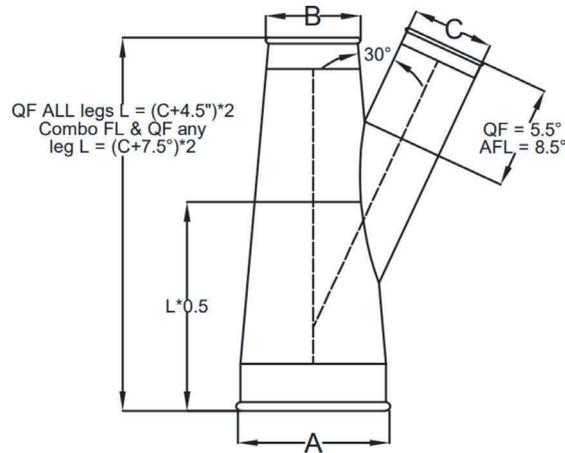

SNAPLOCK MATERIAL OPTIONS

GALVANIZED				STAINLESS STEEL			
Gauges	Size in		Gauges	Size in			
	Min Øin.	Max Øin.		Min Øin.	Max Øin.		
STD.	22	3	12	STD.	22	3	12
	20	13	24		20	13	24
OPT.	18	4	24	OPT.	18	8	24
	16	8	24		16	8	24

FLANGED MATERIAL OPTIONS

GALVANIZED				STAINLESS STEEL			
Gauges	Size in		Gauges	Size in			
	Min Øin.	Max Øin.		Min Øin.	Max Øin.		
STD.	22	3	12	STD.	22	3	12
	20	13	24		20	13	24
	18	26	30		18	26	30
	16	32	40		16	32	40
	14	42	50		20	4	12
OPT.	12	52	72	OPT.	18	4	24
	20	4	12		16	8	30
	18	4	24				
	16	8	30				
	14	8	50				
	12	10	72				