


ORIGIN DUCTWORKS

SNAPLOCK SLEEVE & O-RING GASKET

An adjustable sleeve for ductwork is a telescoping section of duct that allows easy length adjustments without cutting or custom fabrication. It provides a secure, air-tight fit and is available in galvanized steel, stainless steel, or aluminum. Compatible with SNAPLOCK and flanged it simplifies installation by accommodating length variations on-site. Commonly used in dust collection and industrial ventilation, adjustable sleeves often include integrated seals to minimize air leakage and support future system changes.

Øin.	Length in.	ID in.	OD in.	Rolled Edge (nom in.)	Std Weight Lbs.
3.16	11.250	3.16	3.15	0.2	0.80
3.96	11.375	3.96	4.03	0.2	1.05
4.96	11.375	4.96	5.03	0.2	1.30
5.99	11.375	5.99	6.06	0.2	1.60
7.00	11.125	7.00	7.07	0.3	2.40
8.00	11.125	8.00	8.06	0.3	2.70
9.00	11.125	9.00	9.06	0.3	3.05
10.00	11.125	10.00	10.07	0.3	3.40
11.12	11.125	11.12	11.19	0.3	3.80
12.11	10.875	12.11	12.17	0.4	4.20
13.12	10.875	13.12	13.2	0.4	4.70
14.10	10.875	14.10	14.18	0.4	5.85
15.10	10.875	15.10	15.2	0.4	6.25
16.10	10.875	16.10	16.18	0.4	6.65
17.07	10.875	17.07	17.15	0.4	7.45
18.10	10.875	18.10	18.18	0.4	7.45
19.13	10.875	19.13	19.21	0.4	8.10
20.10	10.875	20.10	20.18	0.4	8.80
21.25	10.875	21.25	21.33	0.4	9.70
22.11	10.875	22.11	22.19	0.4	8.10
23.13	10.875	23.13	23.21	0.4	8.80
24.06	10.875	24.06	24.14	0.4	9.70

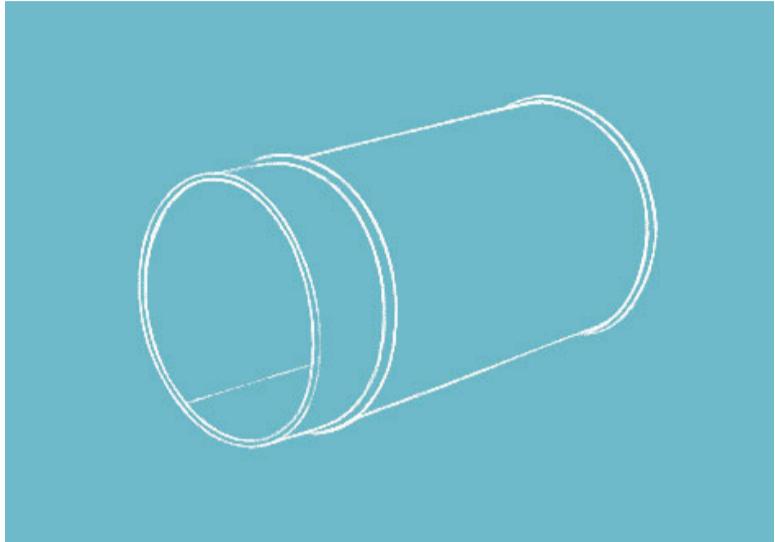

SNAPLOCK MATERIAL OPTIONS

GALVANIZED				STAINLESS STEEL			
Gauges	Size in			Gauges	Size in		
	Min Øin.	Max Øin.			Min Øin.	Max Øin.	
STD.	22	3	12	STD.	22	3	12
	20	13	24		20	13	24
OPT.	18	4	24				

O-RING GASKET

Øin.	Rubber Cord Ø mm	Weight Lbs.
3	7	0.01
4	7	0.02
5	7	0.03
6	7	0.04
7	9	0.08
8	9	0.09
9	9	0.10
10	9	0.11
11	9	0.17
12	11	0.22
13	11	0.23
14	11	0.25
15	11	0.26
16	11	0.27
17	11	0.28
18	11	0.29
20	11	0.30
22	11	0.31
24	11	0.33

