


ORIGIN DUCTWORKS

END CAP with BIRDSCREEN

End Caps are used to terminate or block off unused ducting ports in a system. They are ideal for sealing ports reserved for future expansion or where machinery has been relocated. End Caps can also feature an integrated bird screen for applications requiring ventilation while preventing debris or foreign objects from entering the ductwork.

Øin.	Length in.	Std Weight Lbs.	W/ Birdscreen Weight Lbs.
3	2.25	0.30	0.25
4	2.25	0.37	0.30
5	2.25	0.50	0.35
6	2.25	0.72	0.52
7	2.00	0.92	0.60
8	2.00	1.10	0.70
9	2.00	1.40	0.80
10	2.00	1.65	0.90
11	2.00	1.85	0.95
12	1.88	2.05	1.00
13	1.88	2.45	1.15
14	1.88	3.10	1.25
15	1.88	3.55	1.36
16	1.88	4.00	1.48
17	1.88	4.45	1.60
18	1.88	4.90	1.75
19	1.88	5.20	1.82
20	1.88	5.45	1.90
21	1.88	5.90	2.00
22	1.88	6.30	2.10
23	1.88	7.10	2.45
24	1.88	7.90	2.85

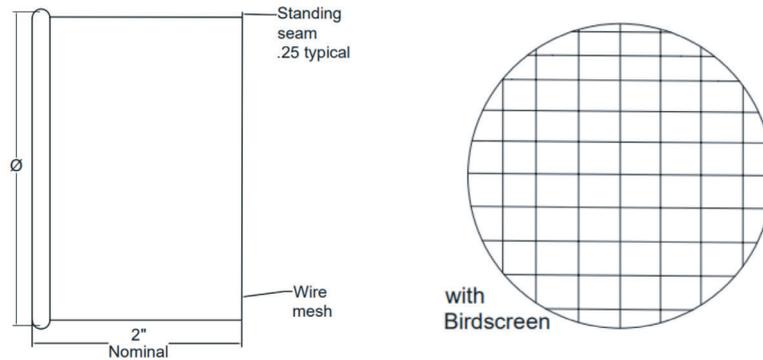

SNAPLOCK MATERIAL OPTIONS

GALVANIZED				STAINLESS STEEL			
Gauges	Size in			Gauges	Size in		
	Min Øin.	Max Øin.			Min Øin.	Max Øin.	
STD.	22	3	12	STD.	22	3	12
	20	13	24		20	13	24
OPT.	18	4	24	OPT.	18	8	24
	16	8	24		16	8	24
	14	8	24				

FLANGED MATERIAL OPTIONS

GALVANIZED				STAINLESS STEEL				
Gauges	Size in			Gauges	Size in			
	Min Øin.	Max Øin.			Min Øin.	Max Øin.		
STD.	22	3	12	STD.	22	3	12	
	20	13	24		20	13	24	
	18	26	30		18	26	30	
	16	32	40		16	32	40	
	14	42	50		OPT.	20	4	12
	12	52	72			18	4	24
OPT.	20	4	12	16	8	30		
	18	4	24					
	16	8	30					
	14	8	50					
	12	10	72					
	10	12	72					