


BUTTERFLY VALVE

The Butterfly Valve, also known as a Butterfly Damper or Volume Damper, is designed to regulate airflow in clean air applications. It features a circular disk mounted on an internal shaft that pivots to control airflow from fully open to fully closed, with the locking quadrant handle securing the valve in any set position. Constructed from galvanized steel or 304 stainless steel, with optional 316 stainless steel, it is available in diameters up to 24" with flanged ends or other end types, and optional 16- and 18-gauge materials for added durability. Diameters are manufactured to a tolerance of 3/8 inch.

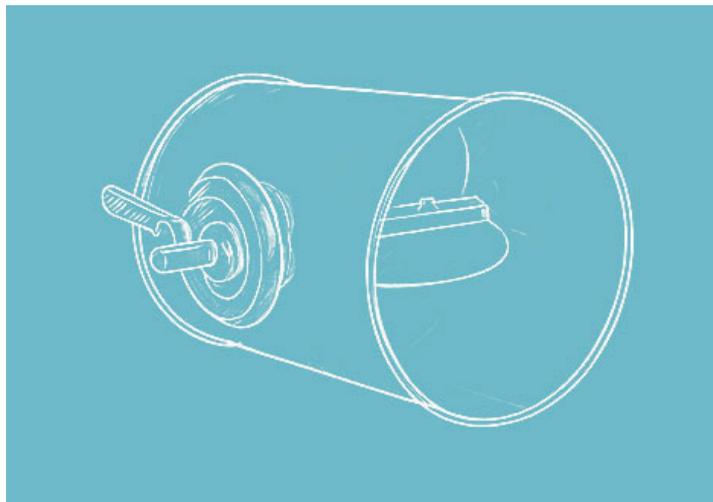

Øin.	Length in.	Std. Weight Lbs.
3	8	1.50
4	8	1.65
5	8	2.00
6	8	2.40
7	8	3.20
8	13	4.10
9	13	4.85
10	13	5.45
11	13	7.00
12	13	8.40
13	17	9.75
14	17	11.85
15	17	12.70
16	17	14.20
17	23	16.10
18	23	18.00
19	23	22.50
20	23	27.75
21	23	30.00
22	23	32.40
23	23	37.50
24	23	37.90

SNAPLOCK & FLANGED MATERIAL OPTIONS

GALVANIZED			
	Gauges	Size in	
		Min Øin.	Max Øin.
STD.	22	3	12
	20	13	24
OPT.	18	4	24
	16	8	24

STAINLESS STEEL			
	Gauges	Size in	
		Min Øin.	Max Øin.
STD.	22	3	16
	20	13	24
OPT.	18	4	24
	16	8	24

Additional Product Components and Notes

Quadrant (3/8" dial regulator)	Butterfly Valve Size	Mfr. Part No. (Duro Dyne)
	3" - 11"	KSR195L
	12" - 24"	KS385
	All SS	KR3SS