


# ORIGIN DUCTWORKS

## PIPE

Origin's Rolled Lip Duct features a laser-welded seam with rolled ends, designed for fast, secure assembly using SNAPLOCK gasketed clamp. It allows for easy installation, clean-out, and relocation. Available in galvanized or stainless steel with diameters up to 24" and gauges from 18ga to 10ga, designed to integrate with other systems. Origin's flanged duct is available in standard offering up to 72" diameter. Origin offers full support, components, and custom fittings to build the best system for your needs.

Øin.	Length in.	SL Std Pipe Weight Lbs.	AFT Std Pipe Weight Lbs.	SL 14ga Pipe Weight Lbs.
3	59.25	4.00	5.40	
4	59.25	5.35	7.05	
5	59.25	6.65	9.05	
6	59.25	7.93	10.73	
7	59.06	11.70	15.70	
8	59.06	13.25	17.75	36
9	58.75	14.62	19.92	40
10	58.75	16.60	23.10	44
11	58.75	18.10	25.10	49
12	58.75	19.75	27.75	53
13	58.75	21.40	29.90	57
14	58.75	27.30	36.80	61
15	58.75	29.25	44.25	66
16	58.75	31.15	47.15	70
17	58.75	33.09	49.59	74
18	58.75	34.00	51.00	79
19	58.75	36.00	55.00	83
20	58.75	38.00	57.00	87
21	58.75	40.00	59.50	92
22	58.75	42.00	63.50	96
23	58.75	44.00	65.50	100
24	58.75	45.82	68.82	104
26	59.00		98.56	
28	59.00		118.00	
30	59.00		137.05	
32	59.00		145.94	
34	59.00		154.83	
36	59.00		162.76	
38	59.00		173.47	
40	59.00		182.81	

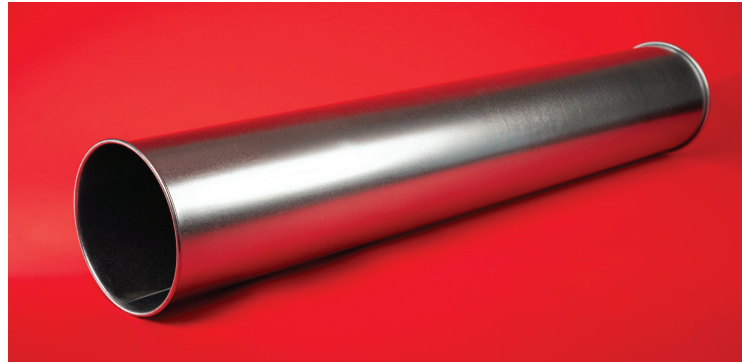

### SNAPLOCK MATERIAL OPTIONS

GALVANIZED				STAINLESS STEEL			
Gauges	Size in			Gauges	Size in		
	Min Øin.	Max Øin.	Min Øin.		Max Øin.		
STD.	22	3	12	STD.	22	3	12
	20	13	24		20	13	24
OPT.	18	4	24	OPT.	18	8	24
	16	8	24		16	8	24
	14	8	24				

### FLANGED MATERIAL OPTIONS

GALVANIZED				STAINLESS STEEL			
Gauges	Size in			Gauges	Size in		
	Min Øin.	Max Øin.	Min Øin.		Max Øin.		
STD.	22	3	12	STD.	22	3	12
	20	13	24		20	13	24
	16	26	40		16	26	40
	14	42	50	OPT.	20	4	12
	12	52	72		18	4	24
OPT.	20	4	12	OPT.	16	8	24
	18	4	24				
	16	8	24				
	14	8	50				
	12	10	72				
	10	12	72				