


ORIGIN DUCTWORKS

BRANCH

Branches (sometimes called “wyes” or “laterals”) are standard with SNAPLOCK Rolled Ends, allowing connections with other SNAPLOCK ductwork.

Øin.	Length in.	Weight Lbs.
3	SL/Raw: $C \times 2 + 9''$ To manuf: $A - C \geq C - B$	2.32
4		3.00
5		3.75
6		4.25
7		5.00
8		6.00
9		7.25
10		8.50
11		9.25
12		10.75
13		11.40
14		13.50
15		15.60
16		17.56
17		19.00
18		21.00
19		25.00
20	Angle/ Flat Flange: $C \times 2 + 15''$ To manuf: $A - C \geq C - B$	30.00
21		35.00
22		39.50
23		47.00
24		53.50
25		63.00
26		74.00
27		81.00
28		98.00
29		107.00
30		117.05
31		121.00
32		125.94
33		130.00
34		134.83
35		138.00
36		142.78
37		148.00
38		153.47
39		158.00
40		162.81

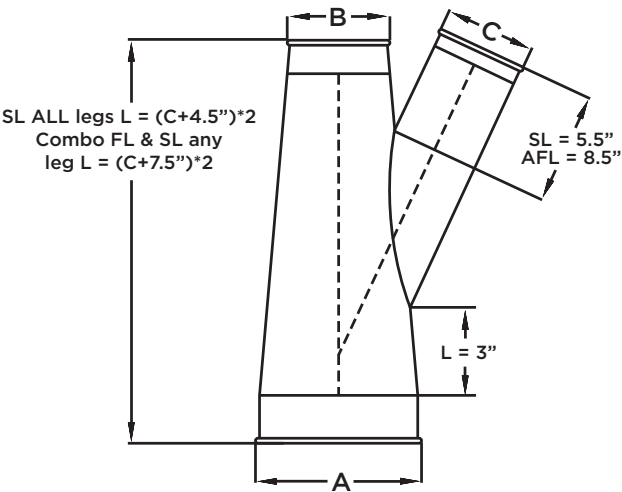

SNAPLOCK MATERIAL OPTIONS

GALVANIZED				STAINLESS STEEL			
Gauges		Size in		Gauges		Size in	
		Min Øin.	Max Øin.			Min Øin.	Max Øin.
STD.	22	3	12	STD.	22	3	12
	20	13	24		20	13	24
OPT.	18	4	24	OPT.	18	8	24
	16	8	24		16	8	24
	14	8	24				

FLANGED MATERIAL OPTIONS

GALVANIZED				STAINLESS STEEL			
Gauges		Size in		Gauges		Size in	
		Min Øin.	Max Øin.			Min Øin.	Max Øin.
STD.	22	3	12	STD.	22	3	12
	20	13	24		20	13	24
	18	26	30		18	26	30
	16	32	40		16	32	40
	14	42	50	OPT.	20	4	12
	12	52	72		18	4	24
OPT.	20	4	12		16	8	30
	18	4	24				
	16	8	30				
	14	8	50				
	12	10	72				
	10	12	72				