



TRACKED CONE CRUSHER STRIKER CM500

TECHNICAL SPECIFICATION





STRIKER CM500 - TECHNICAL SPECIFICATION

Feeder

Capacity - 5m³ / 7m³ (6yd³ / 9yd³) Width - 1200mm (3'11")

Crusher

Size - 1350mm (53")

Forward Product Conveyor

Width - 1200mm (3'11") Discharge Height - 3002mm (9'10")

Tracks

Length - 4085mm (13'4") Width - 500mm (1'8")

Power Pack

Engine Power - 456 kW Hyd. Tank - 600Litre (132gal)
Diesel Tank - 1200Litre (264gal)

Performance

Capacity (up to) - 500T/hr Gap Setting - 10-50mm (0.39"-2")

Operating Dimension

Length - 16095mm (52'10") Height - 4739mm (15'7")
Width - 4350mm (14'3") Weight - 57T (125,663lbs)

Transport Dimension


Length - 17180mm (56'4") Height - 4182mm (13'9")
Width - 3380mm (11'1")

STANDARD EQUIPMENT

- Cone
- Belt Feeder
- Feed Hopper
- Forward Product Conveyor
- Product Transfer Chute
- Track Frame
- Power Pack - CATERPILLAR model C18 engine

OPTIONS

- Hardox hopper liners, water pump for dust suppression, 3mtr air intake snorkel kit, auto zero set cone gap adjustment, hydraulic stacker outlet, radiator blast guards, plant lighting, umbilical remote, dual drive on conveyor, control panel pressuriser, higher & wider track kit.

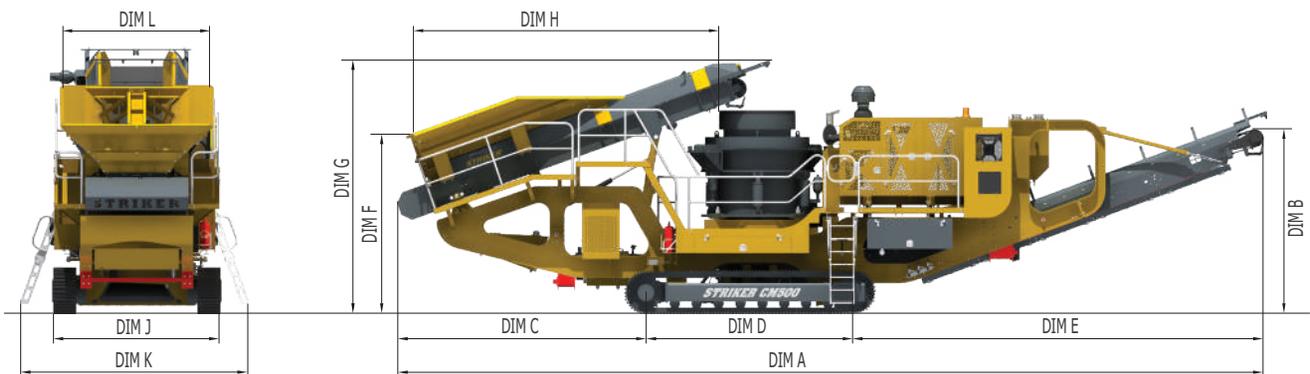

CM500	WORKING DIMENSIONS											TRANSPORT			
	A	B	C	D	E	F	G	H	J	K	L	WIDTH	HEIGHT	LENGTH	WEIGHT
METRIC	16095	3002	4450	4085	7560	3338	4739	5781	3380	4350	2496	3380	4182	17180	57T
IMPERIAL	52' 10"	9' 10"	14' 7"	13' 4"	24' 10"	10' 11"	15' 7"	19'	11' 1"	14' 3"	8' 2"	11' 1"	13' 9"	56' 4"	125,663lbs

*. Weight Variable With Options