



STRIKER CQ300 - TECHNICAL SPECIFICATION

Feeder						
Capacity - 5m ³ / 7m ³ (6yd ³ / 9yd ³)	Width - 1200mm (3'11")					
Crusher						
Size - 900mm (36")						
Forward Product Conveyor						
Width - 1200mm (3'11")	Discharge Height - 3310mm (10'10")					
Tracks						
Length - 3800mm (12'6")	Width - 400mm (1'4")					
Power Pack						
Engine Power - 310 kW	Hyd. Tank - 600Litre (132gal)					

Performance	
Capacity (up to) - 260T/hr	Gap Setting - 6-45mm (0.24"-1.8")
Operating Dimension	
Length - 14600mm (47'11") Width - 2800mm (9'2")	Height - 4200mm (13'9") Weight - 41T (90,390lbs)
Transport Dimension	
Length - 15400mm (50'6") Width - 2800mm (9'2")	Height - 3600mm (11'10")


STANDARD EQUIPMENT

Diesel Tank - 640Litre (141gal)

- Cone
- Belt Feeder
- Feed Hopper
- **Forward Product Conveyor**
- Product Transfer Chute
- Track Frame
- Power Pack CATERPILLAR model C9.3 engine

OPTIONS

Hardox hopper liners, water pump for dust suppression, 3mtr air intake snorkel kit, auto zero set cone gap adjustment, hydraulic stacker outlet, radiator blast guards, plant lighting, umbilical remote, dual drive on conveyor, control panel pressuriser, higher & wider track kit.

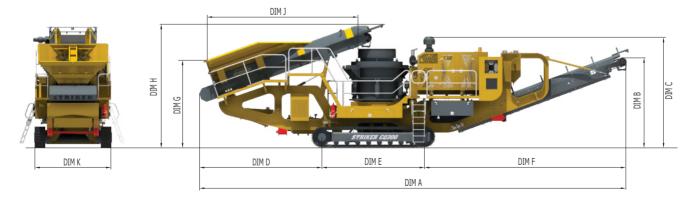

WORKING DIMENSIONS									TRANSPORT					
CQ300	A	В	C	D	Е	F	G	Н	J	K	WIDTH	HEIGHT	LENGTH	WEIGHT
METRIC	14600	3310	4115	4450	3800	6350	3310	4200	5500	2800	2800	3600	15400	41T
IMPERIAL	47' 11"	10' 10"	13' 6"	14' 7"	12' 6"	20' 10"	10' 10"	13' 9"	18' 1"	9' 2"	9' 2"	11' 10"	50' 6"	90,390lbs

*- Weight Variable With Options