



TRACKED IMPACT CRUSHER STRIKER HQ1112

TECHNICAL SPECIFICATION





STRIKER HQ1112 - TECHNICAL SPECIFICATION

Hopper

Capacity - 7m³ / 10m³ (9yd³ / 13yd³)

Crusher

Size (D x W) - 1120mm x 1210mm (44" x 48")

Forward Product Conveyor

Width - 1200mm (3'11")

Discharge Height - 3227mm (10'7")

Side Conveyor (*Optional)

Width - 600mm (2')

Discharge Height (adj.) -2094mm (6'10")

Tracks

Length - 3840mm (12'7")

Width - 400mm (1'4")

Power Pack

Engine Power - 310 kW

Hyd. Tank - 600Litre (132gal)

Diesel Tank - 640Litre (141gal)

Performance

Capacity (up to) - 350T/hr

Gap Setting - 5-150mm (0.2"-5.9")

Operating Dimension

Length - 14636mm (48')

Height - 3947mm (12'11")

Width - 4383mm (14'5")

Weight - 40.8T (89,949lbs)

Transport Dimension

Length - 14940mm (49')

Height - 3580mm (11'9")


Width - 2860mm (9'5")

STANDARD EQUIPMENT

- Vibrating Grizzly Feeder
- Fines Transfer Chute
- Vibrating Unit
- Track Frame
- Pan
- Power Pack - CATERPILLAR model C9.3 engine
- Grizzly Section
- Extra Heavy Duty Rotor
- Feed Hopper
- Hydraulic Impact Arms
- Forward Product Conveyor

OPTIONS

- High-speed kit, water pump for dust suppression, hopper extension wings, bolt in hardox liners in feed hopper, side dirt conveyor, independent vibrating grizzly with pre-screener, belt magnet, hydraulic stacker outlet, control panel pressuriser, 3mtr air intake snorkel kit, dual drive on conveyor, radiator blast guards, plant lighting, umbilical remote control, higher & wider track kit.

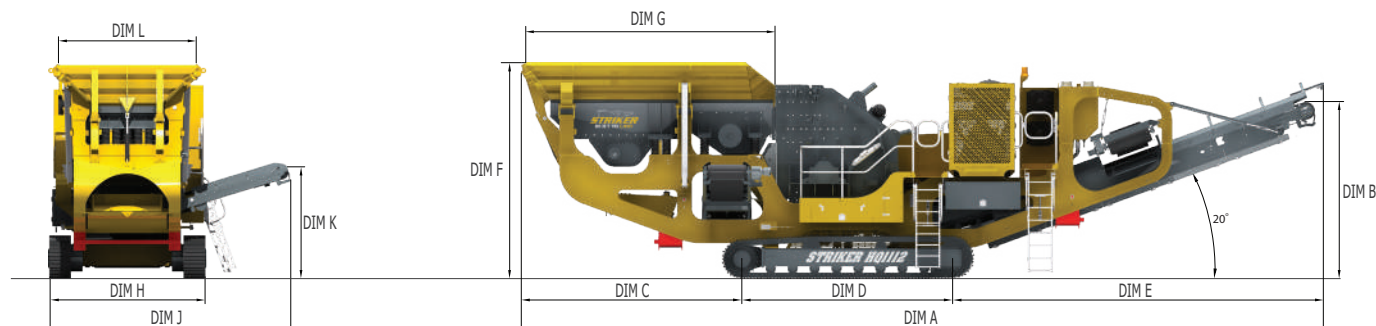

	WORKING DIMENSIONS											TRANSPORT			
HQ1112	A	B	C	D	E	F	G	H	J	K	L	WIDTH	HEIGHT	LENGTH	WEIGHT
METRIC	14636	3227	4024	3840	6772	3947	4557	2860	4383	2094	2560	2860	3580	14940	40.8T
IMPERIAL	48'	10' 7"	13' 2"	12' 7"	22' 3"	12' 11"	14' 11"	9' 5"	14' 5"	6' 10"	8' 5"	9' 5"	11' 9"	49'	89,949lbs

* - Weight Variable With Options