



# TRACKED IMPACT CRUSHER STRIKER HQ1312

TECHNICAL SPECIFICATION





## STRIKER HQ1312 - TECHNICAL SPECIFICATION

### Hopper

Capacity - 10m<sup>3</sup> / 14m<sup>3</sup> (13yd<sup>3</sup> / 18yd<sup>3</sup>)

### Crusher

Size (D x W) - 1300mm x 1200mm (51" x 48")

### Forward Product Conveyor

Width - 1200mm (3'11")

Discharge Height - 3342mm (11')

### Side Conveyor (\*Optional)

Width - 600mm (2')

Discharge Height (adj.) - 2240mm (7'4")

### Tracks

Length - 4085mm (13'5")

Width - 500mm (1'8")

### Power Pack

Engine Power - 315 kW

Hyd. Tank - 600Litre (132gal)

Diesel Tank - 840Litre (185gal)

### Performance

Capacity (up to) - 500T/hr

Gap Setting - 10-150mm (0.4"-5.9")

### Operating Dimension

Length - 15310mm (50'3")

Height - 4435mm (14'7")

Width - 4460mm (14'8")

Weight - 53T (116,845lbs)

### Transport Dimension

Length - 15450mm (50'8")

Height - 4090mm (13'5")


Width - 3020mm (9'11")

## STANDARD EQUIPMENT

- Vibrating Grizzly Feeder
- Fines Transfer Chute
- Vibrating Unit
- Track Frame
- Pan
- Power Pack - CATERPILLAR model C13 engine
- Grizzly Section
- Extra Heavy Duty Rotor
- Feed Hopper
- Hydraulic Impact Arms
- Forward Product Conveyor

## OPTIONS

- High-speed kit, water pump for dust suppression, hopper extension wings, bolt in hardox liners in feed hopper, side dirt conveyor, independent vibrating grizzly with pre-screener, belt magnet, hydraulic stacker outlet, control panel pressuriser, 3mtr air intake snorkel kit, dual drive on conveyor, radiator blast guards, plant lighting, umbilical remote control, higher & wider track kit.

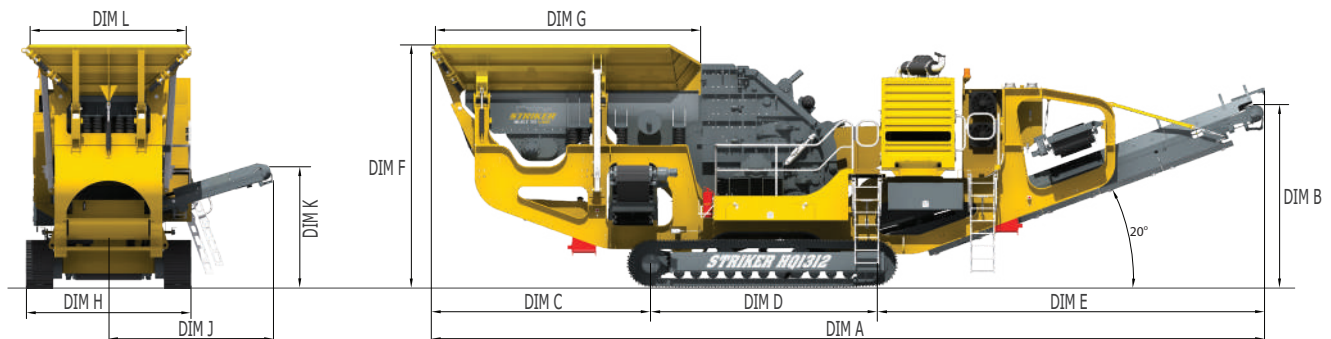

	WORKING DIMENSIONS											TRANSPORT			
HQ1312	A	B	C	D	E	F	G	H	J	K	L	WIDTH	HEIGHT	LENGTH	WEIGHT
METRIC	15310	3342	4028	4085	7197	4435	4864	3020	2950	2240	2844	3020	4090	15450	53T
IMPERIAL	50' 3"	11'	13' 3"	13' 5"	23' 7"	14' 7"	16'	9' 11"	9' 8"	7' 4"	9' 4"	9' 11"	13' 5"	50' 8"	116,845lbs

\* - Weight Variable With Options