

TRACKED IMPACT CRUSHER STRIKER HQR1312

TECHNICAL SPECIFICATION





STRIKER HOR1312 - TECHNICAL SPECIFICATION

-	n l	a1	0.1

Capacity - 10m3 / 14m3 (13yd3 / 18yd3)

Crusher

Size (D x W) - 1300mm x 1210mm (51" x 48")

Forward Product Conveyor	
Width - 1200mm (3'11")	Discharge Height - 3192mm (10'6")
Side Conveyor (*Optional)	
Width - 600mm (2')	Discharge Height (adj.) -2100mm (6'11")
Tracks	
Length - 4085mm (13'5")	Width - 500mm (1'8")

Power Pack

Engine Power - 315 kW Diesel Tank - 840Litre (185gal) Hyd. Tank - 600Litre (132gal)

K - BUULITTE (132gai)

STANDARD EQUIPMENT

- Vibrating Grizzy Feeder
- Vibrating Unit
- Pan
- Grizzly Section
- Feed Hopper
- Forward Product Conveyor
- Screen

- Screen To Impactor Transfer Conveyor
- Fines Transfer Chute
- Track Frame
- Power Pack CATERPILLAR model C13 engine
- Extra Heavy Duty Rotor
- Hydraulic Impact Arms


Screen

Size - 4300mm x 1500m (14' x 5') - Single Deck

Performance	
Capacity (up to) - 500T/hr	Gap Setting - 10-150mm (0.4"-5.9")
Operating Dimension	
Length - 19226mm (63'1") Width - 4278mm (14')	Height - 5194mm (17') Weight - 62T (136,687lbs)
Transport Dimension	
Length - 17982mm (59') Width - 3612mm (11'10")	Height - 4087mm (13'5")

OPTIONS

High-speed kit, water pump for dust suppression, hopper extension wings, bolt in hardox liners in feed hopper, side dirt conveyor, independent vibrating grizzly with pre-screener, belt magnet, hydraulic stacker outlet, control panel pressuriser, 3mtr air intake snorkel kit, dual drive on conveyor, radiator blast guards, plant lighting, umbilical remote control, higher & wider track kit.

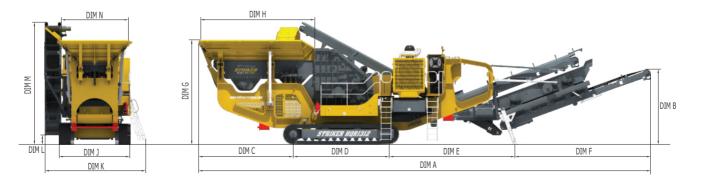

WORKING DIMENSIONS										TRANSPORT							
HQR1312	A	В	С	D	E	F	G	Н	J	K	L	M	N	WIDTH	HEIGHT	LENGTH	WEIGHT
METRIC	19226	3192	4029	4085	5334	5778	4432	4864	3020	4278	410	5194	2844	3612	4087	17982	62T
IMPERIAL	63' 1"	10' 6"	13' 3"	13' 5"	17' 6"	18' 11"	14' 6"	15' 11"	9' 11"	14'	1'4"	17'	9' 4"	11' 10"	13' 5"	59'	136,687lbs

*- Weight Variable With Options