



## STRIKER JQ1380 - TECHNICAL SPECIFICATION

Hopper	
Capacity - 10m <sup>3</sup> / 14m <sup>3</sup> (13yd <sup>3</sup> / 18yd <sup>3</sup> )	
Crusher	
Size - 1220mm x 850mm (48" x 34")	
Forward Product Conveyor	
Width - 1200mm (3'11")	Discharge Height - 3268mm (10'9")
Side Conveyor (*Optional)	
Width - 600mm (2')	Discharge Height (adj.) -2100mm (6'11")
Tracks	
Length - 4085mm (13'5")	Width - 500mm (1'8")
Power Pack	

Performance	
Capacity (up to) - 575T/hr	Gap Setting - 100-200mm (4"-7.9")
Operating Dimension	
Length - 15527mm (50'11") Width - 3739mm (12'3")	Height - 4432mm (14'6") Weight - 63T (138,891lbs)
Transport Dimension	
Length - 15730mm (51'7") Width - 3200mm (10'6")	Height - 3902mm (12'10")

## STANDARD EQUIPMENT

Diesel Tank - 840Litre (185gal)

■ Vibrating Unit

Engine Power - 315 kW

■ Track Frame

■ Pan


■ Power Pack - CATERPILLAR model C13 engine

Hyd. Tank - 600Litre (132gal)

- Grizzly Section
- Jaw Crusher
- Feed Hopper
- **■** Extra Heavy Duty Body
- Forward Product Conveyor
- **■** Crushing Chamber
- Fines Transfer Chute

## **OPTIONS**

Water pump for dust suppression, hopper extension wings, bolt in hardox liners in feed hopper, side dirt conveyor, independent vibrating grizzly with pre-screener, belt magnet, hydraulic stacker outlet, control panel pressuriser, 3mtr air intake snorkel kit, rock breaker and boom, dual drive on conveyor, radiator blast guards, plant lighting, umbilical remote control, higher & wider track kit.

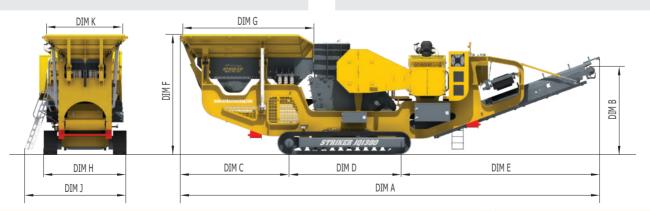

WORKING DIMENSIONS							TRANSPORT							
JQ1380	A	В	С	D	E	F	G	Н	J	K	WIDTH	HEIGHT	LENGTH	WEIGHT
METRIC	15527	3268	4035	4085	7407	4432	4851	3040	3739	2819	3200	3902	15730	63T
IMPERIAL	50' 11"	10' 9"	13' 3"	13' 5"	24' 4"	14' 6"	15' 11"	10'	12' 3"	9' 3"	10' 6"	12' 10"	51' 7"	138,891lbs

\*- Weight Variable With Options