



TRACKED SCALPING SCREEN STRIKER SQR2062

TECHNICAL SPECIFICATION



+61 8 9437 3533

info@strikercrushing.com

www.strikercrushing.com





STRIKER SQR2062 - TECHNICAL SPECIFICATION

Feeder	
Capacity - 10m³ (13yd³)	Type - Belt or Apron with Heavy-Duty Liners
Screenbox	
Top Deck - 20' x 6' (6.1m x 1.8m)	Angle - 13° - 17°
Bottom Deck - 20' x 6' (6.1m x 1.8m)	
Fines Product Conveyor	
Width - 1000mm (40")	Discharge Height - 4168mm (13'8")
Middle Product Conveyor	
Width - 1000mm (40")	Discharge Height - 4307mm (14'2")
Oversize Product Conveyor	
Width - 1500mm (5')	Discharge Height - 3477mm (11'5")
Tracks	
Width -400mm (1'4")	



Power Pack	
Engine Power - 185 kW	Hydraulic Tank - 460Litre (101gal)
Diesel Tank - 430Litre (95gal)	
Performance	
Capacity (up to) - 600T/hr	
Operating Dimension	
Length - 16292mm (53'5")	Height - 5053mm (16'7")
Width - 14353mm (47'1")	Weight- 44T (97,003lbs)
Transport Dimension	
Length - 15947mm (52'4")	Height - 3651mm (12')
Width - 2998mm (9'10")	

STANDARD EQUIPMENT

- Chassis
 - Hopper
 - Feeder
 - Vibrating Screen
 - Fines Product Conveyor
 - Middle Product Conveyor
- Oversize Product Conveyor
 - Access Walkways
 - Power Pack - CATERPILLAR model C7.1 turbo charged water cooled engine
 - Track Controls

OPTIONS

- Metal apron feeder, hydraulic folding hopper extension wings, chevron conveyor belts, spherical roller bearings with split bearing housings, hydraulic stacker outlet, screen box soft start and stop technology, plant lighting, safety lanyards on all conveyors, safety lanyards on each side of the conveyor, full mine spec guarding on all conveyors.

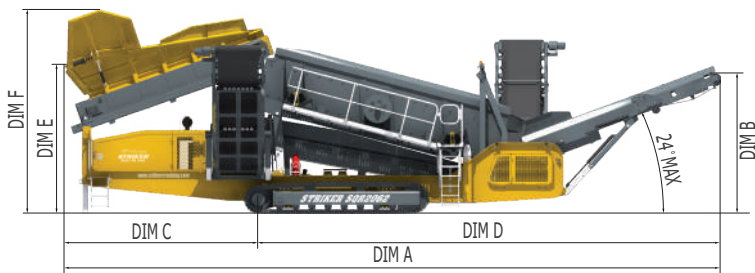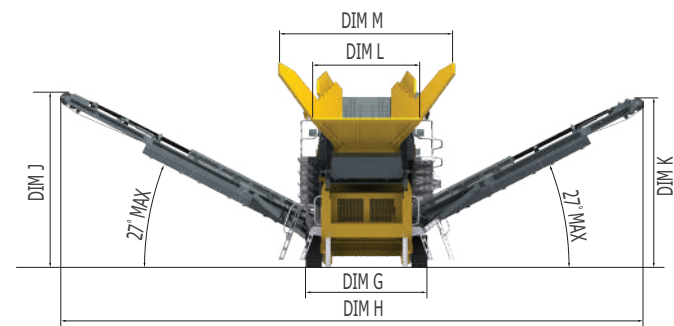

WORKING DIMENSIONS													TRANSPORT			
SQR2062	A	B	C	D	E	F	G	H	J	K	L	M	WIDTH	HEIGHT	LENGTH	WEIGHT
METRIC	16292	3477	4807	11485	3686	5053	2998	14353	4307	4168	2632	4256	2998	3651	15947	44T
IMPERIAL	53' 5"	11' 5"	15' 9"	37' 8"	12' 1"	16' 7"	9' 10"	47' 1"	14' 2"	13' 8"	8' 8"	14'	9' 10"	12'	52' 4"	97,003lbs

*- Weight Variable With Options