



TRACKED SCALPING SCREEN STRIKER SQR1652

TECHNICAL SPECIFICATION



+61 8 9437 3533

✉ info@strikercrushing.com

🌐 www.strikercrushing.com





STRIKER SQR1652 - TECHNICAL SPECIFICATION

Feeder

Capacity - 8.7m³ (11.7yd³) Type - Belt or Apron with Heavy- Duty Liners

Screenbox

Top Deck - 16' x 5' (4.9m x 1.5m) Angle - 15° - 19°
Bottom Deck - 16' x 5' (4.9m x 1.5m)

Fines Product Conveyor

Width - 900mm (2'11") Discharge Height - 4350mm (14'3")

Middle Product Conveyor

Width - 900mm (2'11") Discharge Height - 4106mm (13'6")

Oversize Product Conveyor

Width - 1500mm (4'11") Discharge Height - 3371mm (11'1")

Tracks

Width -400mm (1'4")

Power Pack

Engine Power - 96 kW Hydraulic Tank - 460Litre (101gal)
Diesel Tank - 430Litre (95gal)

Performance

Capacity (up to) - 450T/hr

Operating Dimension

Length - 14789mm (48'6") Height - 4521mm (14'10")
Width - 14358mm (47'1") Weight- 30.4T (67,021lbs)

Transport Dimension



Length - 14115mm (46'4") Height - 3411mm (11'2")
Width - 2998mm (9'10")

STANDARD EQUIPMENT

- Hopper
- Feeder
- Vibrating Screen
- Fines Product Conveyor
- Middle Product Conveyor
- Oversize Product Conveyor
- Access Walkways
- AR model C4.4 turbo charged water cooled engine
- Air Cleaner
- Track Controls

OPTIONS

- Metal apron feeder, hydraulic folding hopper extension wings, chevron conveyor belts, spherical roller bearings with split bearing housings, hydraulic stacker outlet, screen box soft start and stop technology, plant lighting, safety lanyards on all conveyors, safety lanyards on each side of the conveyor, full mine spec guarding on all conveyors.

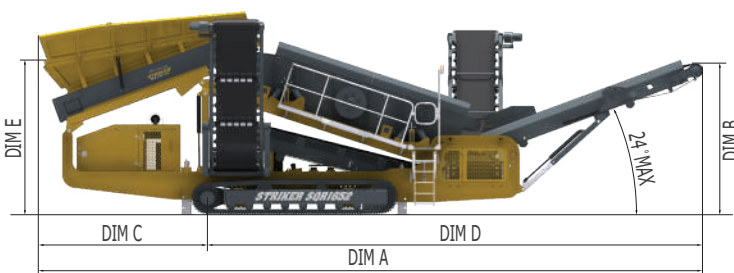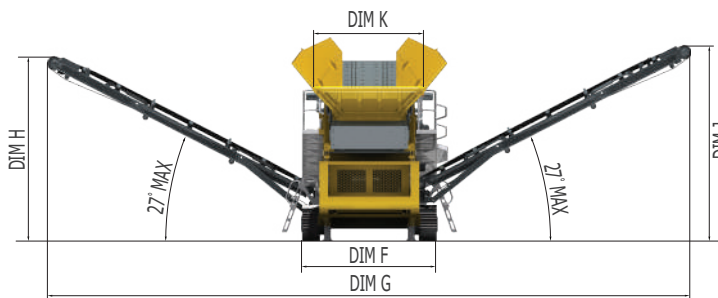

WORKING DIMENSIONS											TRANSPORT			
SQR1652	A	B	C	D	E	F	G	H	J	K	WIDTH	HEIGHT	LENGTH	WEIGHT
METRIC	14789	3371	3767	11022	3437	2998	14358	4106	4350	2455	2998	3411	14115	30.4T
IMPERIAL	48' 6"	11' 1"	12' 4"	36' 2"	11' 3"	9' 10"	47' 1"	13' 6"	14' 3"	8' 1"	9' 10"	11' 2"	46' 4"	67,021lbs

*- Weight Variable With Options

While Striker Australia Pty Ltd makes every endeavour to ensure of the information presented in this brochure, we cannot be held liable in any way for any loss or damage for any inaccuracies or errors you may find. Striker Australia Pty Ltd cannot make any warranty as to the fitness of purpose of any goods, equipment or material in this brochure for your purposes and you must use your own endeavours and make your own enquiries in that regard.

SP02SI91-2500