

C12 CONE CRUSHER

ANACONDA[®]
A McLanahan Company

The Anaconda C12 is a tracked mobile cone crusher for secondary and tertiary reduction in sand and gravel, river rock, hard stone, ores and minerals. Equipped with the FLSmidth Raptor[®] R250 chamber, the C12 accepts feed up to 235 mm (9.25") and delivers up to 240 tph (265 US tph). The chamber is designed to be choke-fed to produce consistent reduction and a cubical product while minimising wear and tear on the crusher's internal component. Ultrasonic level control manages the feed, while hydraulic CSS adjustment allows quick setting changes to maintain output.

Material is discharged on a 1,050 mm (42") main conveyor with a stockpile height of 3.8 m (12' 6"). A twin-coil metal detector protects the chamber, and an optional purge chute is available to automatically diverts tramp material. The C12 can be set up in under 10 minutes, and with compact transport dimensions and tracked mobility it relocates easily between sites. Optional telematics provide remote monitoring of production and utilisation, helping operators plan maintenance and maximise uptime.

FEATURES

FLSmidth Raptor[®] R250
cone chamber


Scheduled pre heat
system

Excellent ground
clearance under crusher

Fitted with medium liner
as standard

Dust suppression as
standard

Set up in under
10 minutes

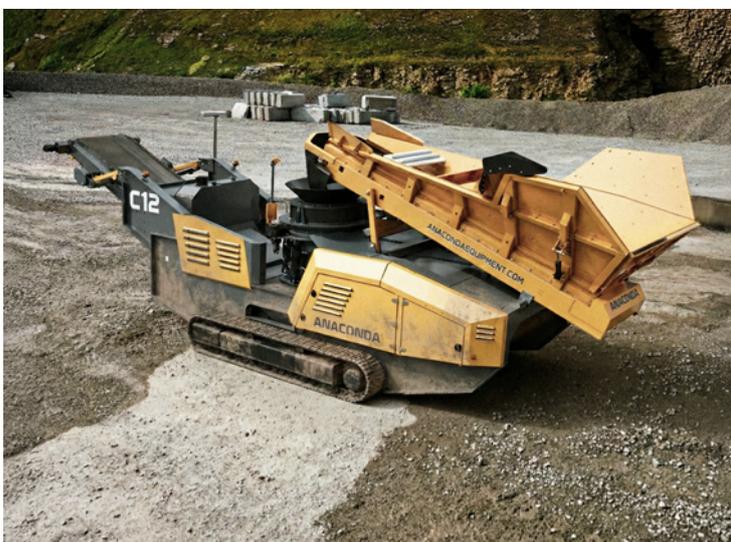

Technical Specifications

Feeder Conveyor		
Belt Width	1,050 mm	41"
Metal Detector	Twin coil	Twin coil
Volume	6.3 m ³	8 yd ³
Cone Crusher Chamber		
Brand	FLSmidth Raptor [®] R250	FLSmidth Raptor [®] R250
Min. CSS	6 mm	¼"
Max Feed	235 mm	9.25"
Throw	89 mm	4"
Capacity	Up to 240 tph	Up to 265 US tph
Main Conveyor		
Discharge Height	3.8 m	12' 6"
Belt Width	1,050 mm	42"
Weight		
Operating Weight	34,000 kg	74,957 lbs

Engine Options



CAT 9.3 LRC	310 kW	416 HP	Tier 2
CAT 9.3	310 kW	416 HP	Stage V

Tier 2: Rest of World | **Stage V:** EU/UK/US



Optional Extras

- Liners - fine, medium, coarse
- Working lights
- Conveyor basket guards
- Complete conveyor under guarding
- Feed camera
- Belt scales
- Telematics
- Mining spec - includes twin isolators, battery jump receptacle, and anti-burst hydraulic hose covering (for full details contact your Anaconda representative).

WORKING DIMENSIONS

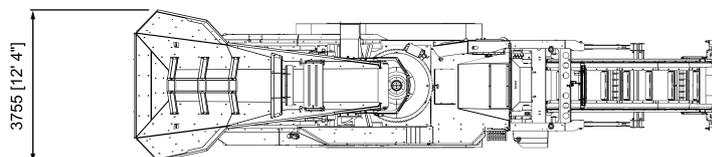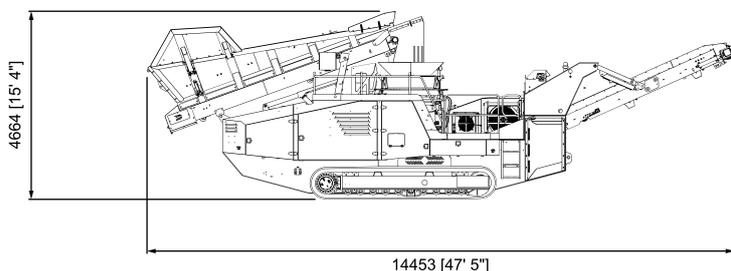

TRANSPORT DIMENSIONS

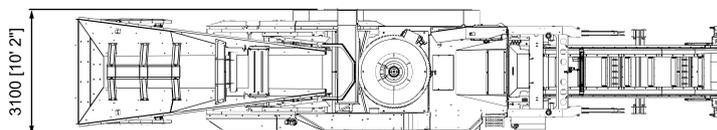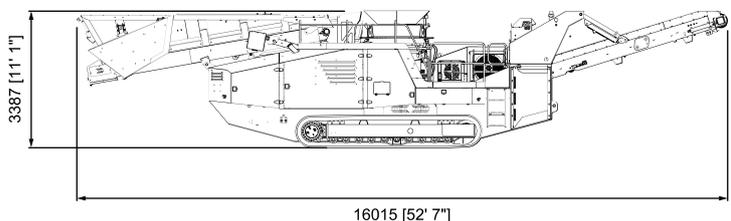

Anaconda Equipment is sold and supported worldwide through our authorised dealer network. For enquiries or to find your nearest dealer, please visit: anacondaequipment.com. Anaconda reserves the right to alter design and specifications without notice. Throughput rates may vary depending on material type, feed size and application.