

ST50/60/80

WHEELED CONVEYOR

ANACONDA[®]
A McLanahan Company

Anaconda Wheeled Conveyors are engineered for stockpiling and material transfer in quarrying, sand and gravel, recycling and bulk loading operations. The range includes three models: the **ST50** features a 15 m (50') conveyor with an 800 mm (32") belt and delivers up to 200 tph (221 US tph); the **ST60** offers an 18 m (60') conveyor with an 800 mm (32") belt and the same capacity of up to 200 tph (221 US tph); and the **ST80** provides a 24.5 m (80') conveyor with a 900 mm (36") belt and capacities of up to 400 tph (440 US tph).

Designed to work in line with crushers, screens, washing equipment or static plants, they reduce the need for loaders and excavators to re-handle material, lowering operating costs while improving site efficiency. Each model is available with hydraulic, electric or diesel drive to integrate with site infrastructure, and options such as radial undercarriages, containerised transport and dust suppression allow them to adapt to both fixed installations and mobile operations.

FEATURES

Heavy-duty wheeled chassis

Hydraulic, electric or diesel drives

Radial undercarriage options

Container-ready for global transport

Optional belt, skirt and dust packages



ST50/60/80 WHEELED CONVEYOR

Specification	ST50	ST60	ST80
Conveyor Length	15.2 m (50')	18.0 m (60')	24.5 m (80')
Belt Width	800 mm (32")	800 mm (32")	900 mm (36")
Discharge Height	4.6 - 7.05 m (15' - 23' 1")	5.4 - 8.25 m (17' 7" - 27')	7.2 - 10.2 m (23' 3" - 33' 5")
Capacity*	Up to 200 tph (221 US tph)	Up to 200 tph (221 US tph)	Up to 400 tph (221 US tph)
Max Feed Size	100 mm (4")		
Feedboot Capacity	1 - 3 m ³ (1.3 - 3.9 yd ³)		
Machine Weight	2,800 kg (6,200 lbs)	3,200 kg (7,000 lbs)	8,700 kg (19,180 lbs)


* Capacity varies with application and feed material

Engine Options			
ST50, ST60	CAT 2.2	36.3 kW (49 HP)	Tier 3a
ST80	CAT 2.2	36.3 kW (49 HP)	Tier 3a
ST50, ST60, ST80	Deutz 2.9 L4	50 kW (67 HP)	Stage V
ST80	CAT C1.7	36.3 kW (49 HP)	Stage V


Tier 3 / Stage 3a: Rest of World | Stage V: JCB - EU/UK; CAT - EU/UK/US

Optional Features	
• Belt upgrade	• Side skirts (ST50 and ST60)
• Chevron belt	• Hydraulic or electric powered radial drive (ST50)
• Dust canopy	• Impact rollers (ST80)

WORKING DIMENSIONS (Self Powered)

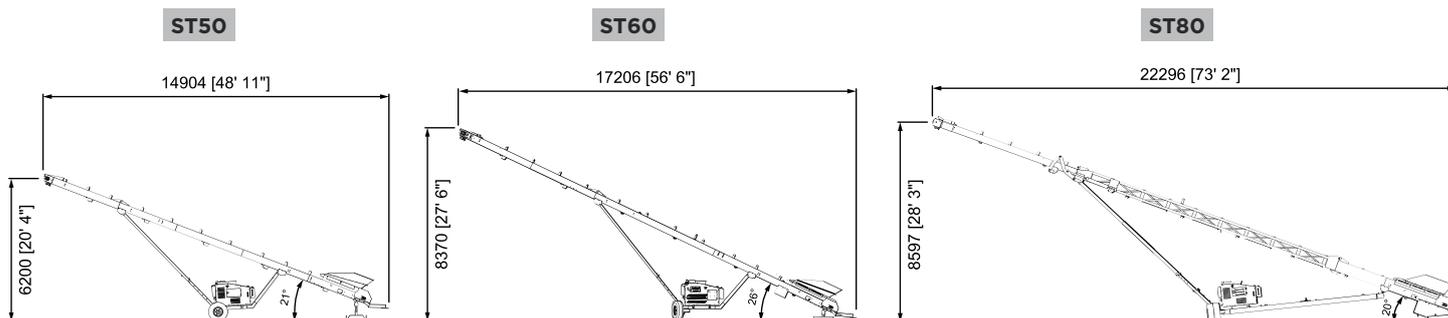

TRANSPORT DIMENSIONS (Self Powered)

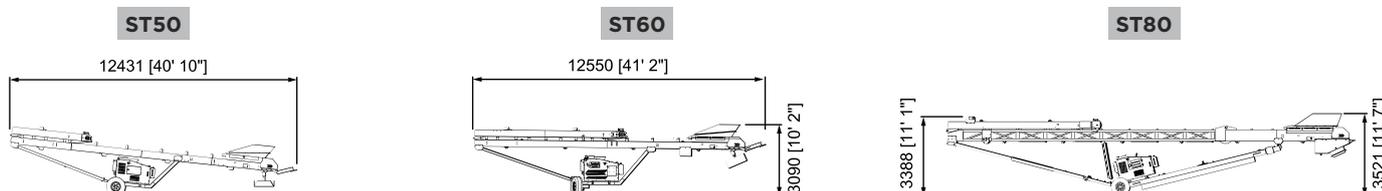

Anaconda Equipment is sold and supported worldwide through our authorised dealer network. For enquiries or to find your nearest dealer, please visit: anacondaequipment.com. Anaconda reserves the right to alter design and specifications without notice. Throughput rates may vary depending on material type, feed size and application.