

TR60

TRACKED CONVEYOR

ANACONDA[®]
A McLanahan Company

The TR60 is an 18.3 m (60') tracked conveyor with a 900 mm (36") 3-ply belt, capable of stockpiling up to 8.92 m (29' 3"). With a throughput of 450 tph (496 US tph), it works directly behind crushers, screens and trommels to transfer soil, aggregates, coal, sand and overburden up to 100 mm (4"). A 1.4 m³ (1.8 yd³) feedboot with impact bed protects the belt during loading, and the hydraulic folding head section provides quick adjustment of discharge height.

Built for mobile use, the TR60 containerises without breakdown to reduce relocation time. Hydraulic folding capabilities speeds up on-site set-up, and the tracked undercarriage provides stable movement across varied ground conditions. These features allow the TR60 to maintain consistent flow and reliable stockpiling in demanding production environments.

FEATURES

Compact design for material transfer and stockpiling

Track-mounted for on-site movement

Hydraulic folding head section for quick setup

Standard 3-ply wide plain belt

Impact bed under feedboot

Containerises without breakdown



Technical Specifications

Capacity*	Up to 450 tph	Up to 496 US tph
Conveyor Length	18.3 m	60' 0"
Belt Width	900 mm	36"
Max Discharge Height	8.92 m	29' 3"
Max Feed Size	100 mm	4"
Feedboot Capacity	1.4 m ³	1.8 yd ³
Machine Weight	11,000 kg	24,251 lbs

* Capacity varies with application and feed material

Engine Options



CAT 2.2 NA	36.3 kW	49 HP	Tier 3
JCB 444 DieselMAX	63 kW	85 HP	Tier 3
JCB 444 EcoMAX	55 kW	74 HP	Tier 4 Final
CAT C2.8	55 kW	74 HP	Stage V
DEUTZ 2.9 L4	50 kW	67 HP	Stage V

Tier 3 / Stage 3a: Rest of World | **Tier 4 Final:** US, CA, JP, KR, AU (opt.)
Stage V: JCB - EU/UK; CAT - EU/UK/US



Optional Features

- Belt upgrade
- Chevron belt
- Side skirts
- Dust canopy
- Ar400 lined feedboot
- Overband magnet
- Belt scales
- Anti-roll back
- Under guard

WORKING DIMENSIONS

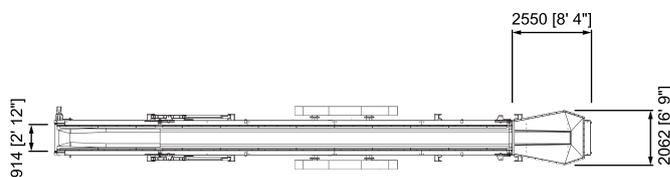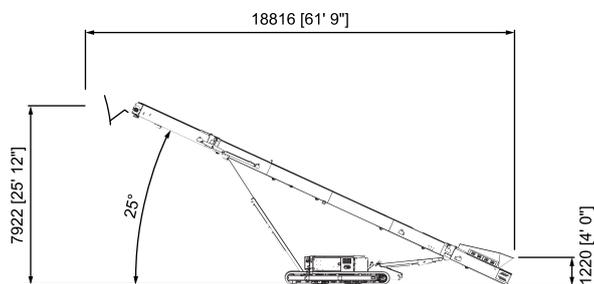

TRANSPORT DIMENSIONS

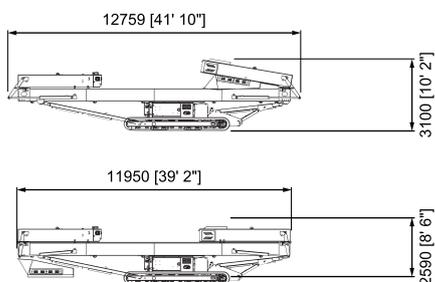

Anaconda Equipment is sold and supported worldwide through our authorised dealer network. For enquiries or to find your nearest dealer, please visit: anacondaequipment.com. Anaconda reserves the right to alter design and specifications without notice. Throughput rates may vary depending on material type, feed size and application.