



TRACKED SIZING SCREEN STRIKER SQ1862

TECHNICAL SPECIFICATION





STRIKER SQ1862 - TECHNICAL SPECIFICATION

Hopper

Capacity - 9m³ (12yd³)

Feeder

Belt Width - 1000mm (3'3")

Screenbox

Top Deck - 18' x 6' (5.5m x 1.8m) Bottom Deck - 18' x 6' (5.5m x 1.8m)
Angle - 20° - 30°

Tail Conveyor

Belt Width - 1500mm (4'11") Discharge Height - 4599mm (15'1")

Side Conveyors

Width - 800mm (2'8") Discharge Height (adj.) - 5184mm (17')

Main Feed Conveyor

Width - 1200mm (3'11")

Tracks

Length - 3840m (12'7") Width - 400mm (1'4")

Power Pack

Engine Power - 96 kW
Diesel Tank - 300Litre (66gal)

Hyd. Tank - 460Litre (101gal)

Performance

Capacity (up to) - 500T/hr

Operating Dimension

Length - 19109mm (62'8") Height - 5840mm (19'2")
Width - 18352mm (60'3") Weight - 36T (79,366lbs)

Transport Dimension



Length - 18114mm (59'5") Height - 3460mm (11'4")
Width - 3046mm (10')

STANDARD EQUIPMENT

- Main Chassis
- Side Product Conveyors
- Belt Feed Hopper
- Screen Box
- Remote Tipping Grizzly
- Access Walkways
- Main Feed Conveyor
- Power Pack - CATERPILLAR model C4.4 engine
- Tail Conveyor
- Track Frame

OPTIONS

- Tipping grid or no tipping grid, 2 deck vibrating tipping grid, chevron conveyor belts, spherical roller bearings with split bearing housings, hydraulic stacker outlet, screen box soft start and stop technology, plant lighting, safety lanyards on all conveyors, safety lanyards on each side of the conveyor, full mine spec guarding on all conveyors.

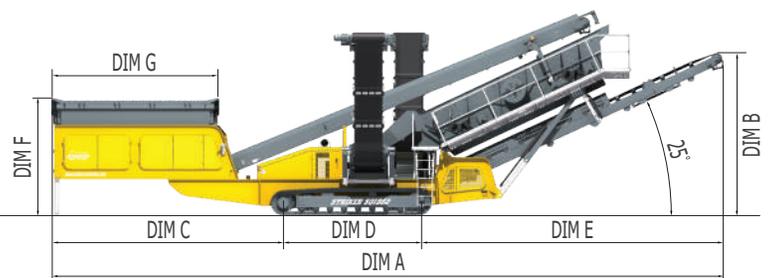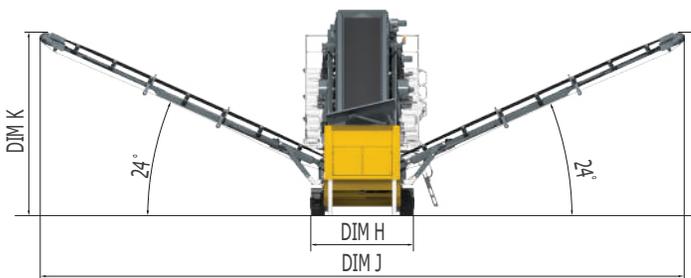

SQ1862	WORKING DIMENSIONS										TRANSPORT			
	A	B	C	D	E	F	G	H	J	K	WIDTH	HEIGHT	LENGTH	WEIGHT
METRIC	19109	4599	6438	3840	8831	3337	4697	2928	18352	5184	2928	3460	18114	36T
IMPERIAL	62' 8"	15' 1"	21' 1"	12' 7"	29'	10' 11"	15' 5"	9' 7"	60' 3"	17'	9' 7"	11' 4"	59' 5"	79,366lbs

*- Weight Variable With Options