

Eclipse 2.2 - adjustable concealed hinge with frame part reduced





Description

Reversible concealed hinge with a frame part reduced to 21 mm.
Eclipse 2.2 is adjustable on 3 axis and allows a 180° opening.
The hinge can be used with the door closer.


Capacity


60 kg with 2 hinges, 80 kg with 3 hinges.

Note. *Consult the document "Positioning and application fields" to determine the number of hinges required based on the weight, dimensions of the sash, and any third-party accessories.*

Fastening

Perform pre-holes. Mill sash and frame as indicated in the picture and fasten the hinge with ø5 mm screws of a suitable length for the sash part and with ø5 mm screws of a suitable length for the frame part.

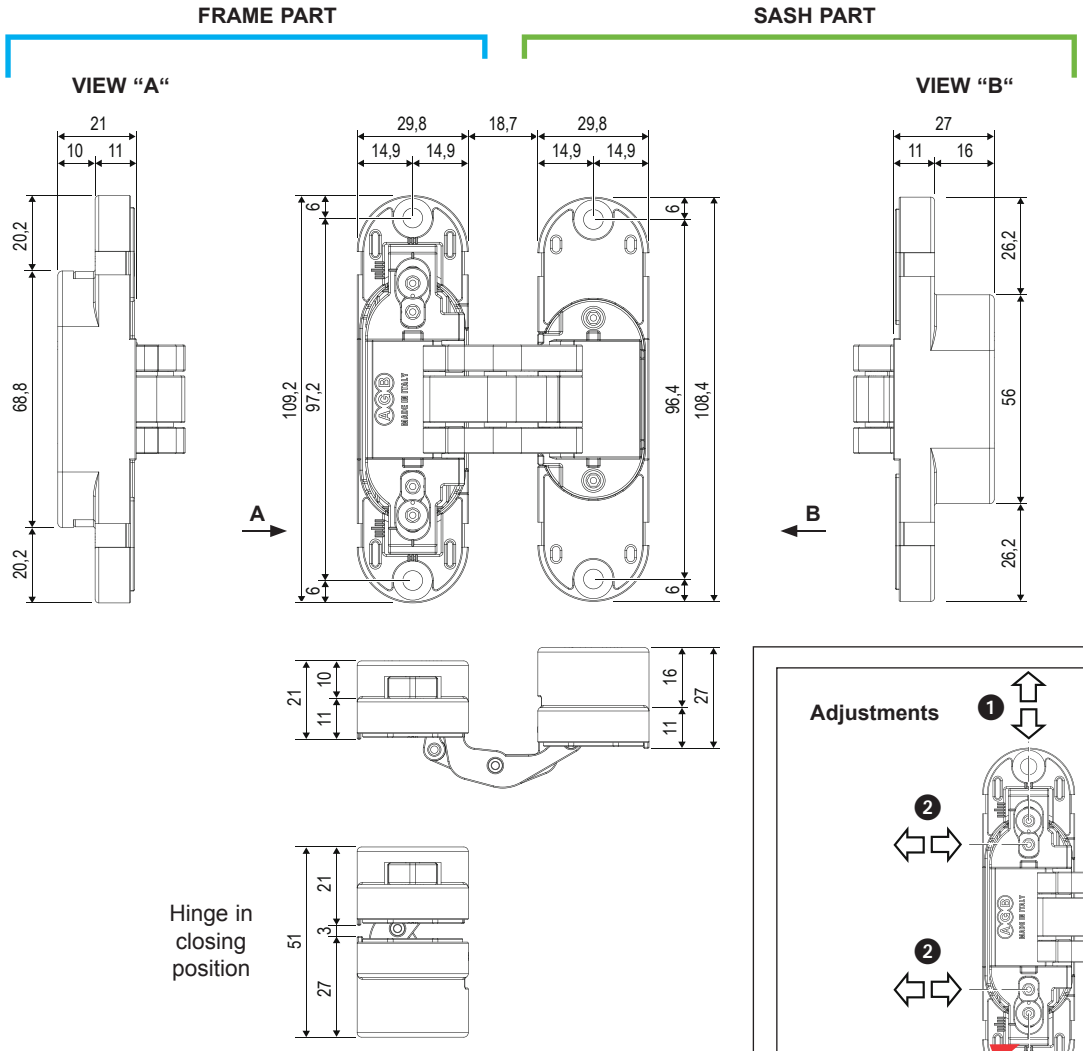


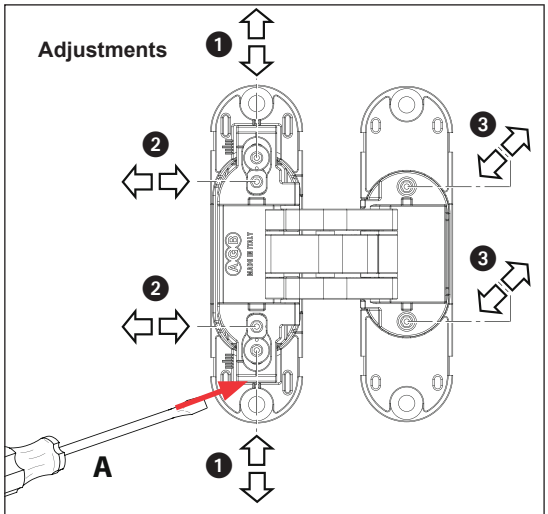

Please adjust the hinges with a 3 mm Allen key, as indicated here below:

- **±2 mm vertical adjustment:** loosen the screws ❶ using a screwdriver (**A**) or a wedge which is suitable for Eclipse hinges, art. E30200.89.01. After this operation fasten the screws
- **±1 mm pressure adjustment:** loosen the screws ❷ and move the hinge body. After this operation fasten the screws.
- **±1,5 mm horizontal adjustment:** move the screws ❸.


Covers available



Plastic material:
Art. E30200.87.XX

Eclipse 2.2 - adjustable concealed hinge with frame part reduced

DRILLING DIAGRAM

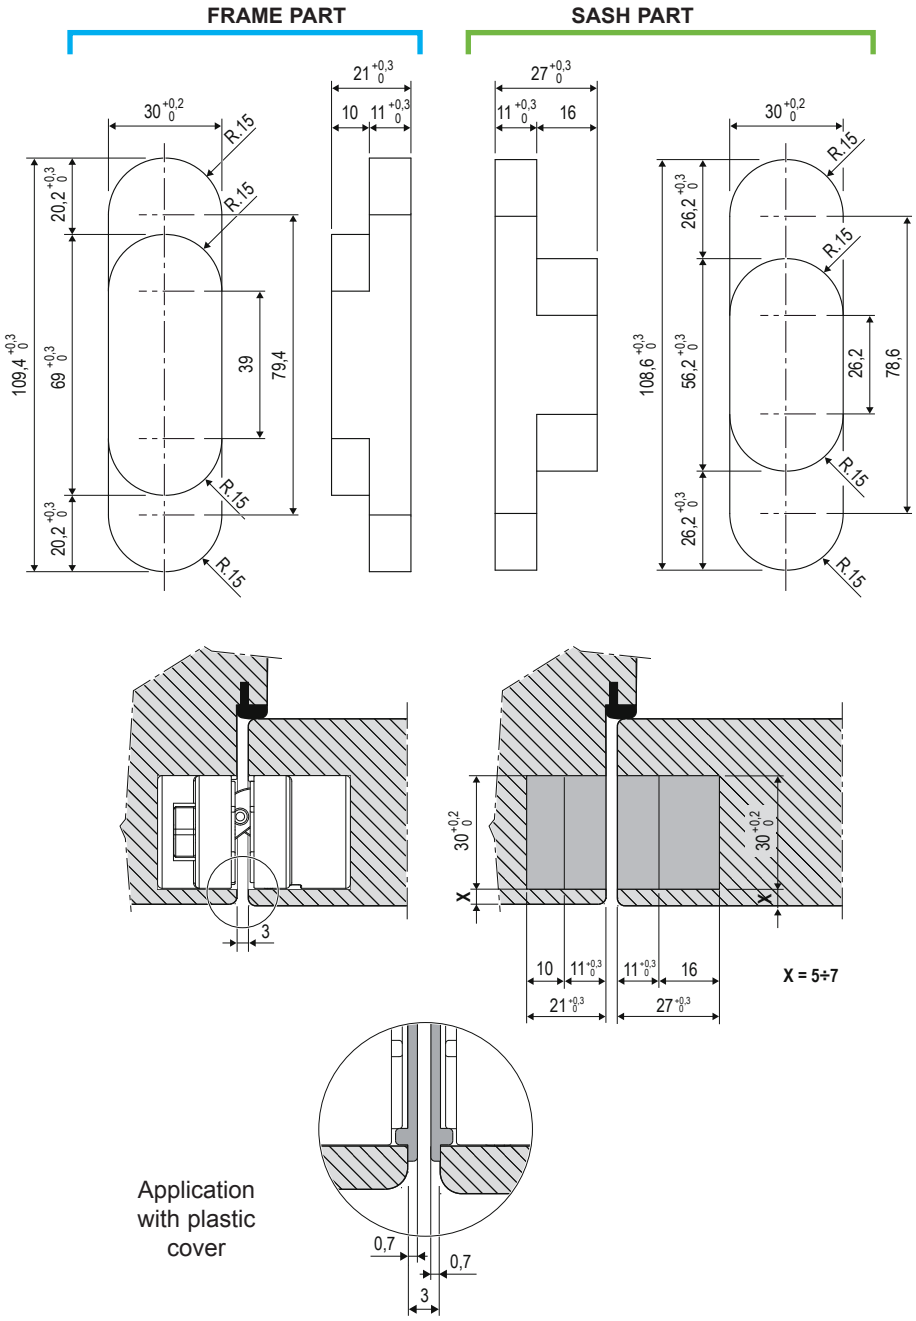

Order specifications

Material	Article
ZAMAK	E30200.85.XX

Note. *Refer to the price list in force to check the availability of the finishes.*