

multi-pavers

Product data sheet no. 9154 - R-05

Issue: June 2025

SPORTEC® multi-pavers are the ideal flooring for walkways and fitness or leisure areas, both outdoors and indoors. They offer a pleasant walking feeling and protect exercise equipment and dumbbells by its springy effect. The shape of the pavers allow cost-effective and easy installation. Important features are the environmentally production and recycling (KRAIBURG Relastec GmbH & Co.KG double recycling guarantee).

Material


Material:

Recycling tyre rubber granules bonded with polyurethane elastomer.

Product design

Colour(s): red, black or green
(small colour differences can occur due to raw material)

Colour(s):

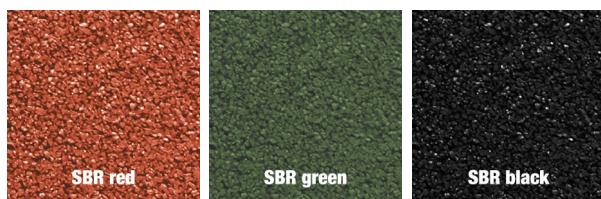

Surface: closed-pored smooth , edges chamfered

Lower side: smooth, edges not chamfered

Dimensions / Tolerances / Weight

Thickness(es): 43 mm (± 1,5 mm)

The product data sheet is not subject to any change service! All information is without guarantee.

Latest version of this document available on www.kraiburg-relastec.com/sportec

page 1 of 3

multi-pavers

Product data sheet no. 9154 - R-05

Issue: June 2025

| | |
|-----------------|---|
| Length x width: | 200 mm/ 165 mm (full) 100 mm/ 165 mm (half) 200 mm/ 140 mm (starter) (± 0.8 %) |
| Density: | approx. 900 kg/m ³ |
| Weight: | 1.2 kg/piece (full) 0.6 kg/piece (half) 1.1 kg/piece (starter) |

Product Testing

| | |
|--------------------------------|---|
| Fire resistance: | Efl (B2) (EN 13501-1) |
| Tensile strength: | min. 1.7 N/mm ² (internal tested) |
| Elongation at break: | min. 58 % (internal tested) |
| Water permeability: | 23,878 mm/h (DIN EN 12616) |
| Abrasion: | 0.4 g (DIN EN ISO 5470-1) |
| Remaining deformation: | 0.74 mm / after 5 min 0.24 mm / after 24 h (DIN EN 1516) |
| Light reflectance value (LRV): | 3.0 % (at black) (EN 17317) |
| Stress -static: | 0.36 mm / after 30 min 0.32 mm / after 1 h 0.21 mm / after 6 h 0.18 mm / after 24 h 0.10 mm / after 72 h (DIN EN 1516) |
| Stress -dynamic: | 0.08 mm / after 30 min 0.06 mm / after 1 h 0.05 mm / after 6 h 0.05 mm / after 24 h 0.03 mm / after 72 h (DIN EN 1516) |

The product data sheet is not subject to any change service! All information is without guarantee.

Latest version of this document available on www.kraiburg-relastec.com/sportec

page 2 of 3

VOC emission rating: French VOC Regulation (A+)

Installation

Installation has to be done in accordance to the Installation Recommendation of **SPORTEC® multi-pavers**. The latest version of the Installation Recommendation can be downloaded at the website of KRAIBURG Relastec GmbH & Co. KG.