

1. Applications

EUROFLEX® Cubes are used as seating and communication islands in playing areas and also as sandbox edging and barriers.

EUROFLEX® Cubes are manufactured by an environment-friendly process and can be recycled as process raw material at the end of their service life.

They can be played on under almost any weather conditions.

2. Material

Rubber granulate:	granulated recycled rubber (Standard Cubes) surface EPDM (EPDM Cubes)
Binding agent:	MDI polyurethane

3. Characteristics

Colour:	red, green, grey or black (Standard Cubes) EPDM Topping minor colour variation possible
---------	---



EPDM Cubes



All information without guarantee, subject to change. The Data Sheet is not subject to any change service.
Each current and valid from can be recalled at www.kraiburg-relastec.com/euroflex

page 1 of 4

ATTENTION: the color specification base on RAL and may differ from the product.



All information without guarantee, subject to change. The Data Sheet is not subject to any change service.
Each current and valid from can be recalled at www.kraiburg-relastec.com/euroflex

page 2 of 4

4. Dimensions / Tolerances

L x W x T : 300 x 300 x 300mm

Only available as a standard version in red, green, gray or black!

Dimensional tolerances: $\pm 0.8\%$

Ground anchor: 2 pcs. tube 5/4" (42.4x2mm) 30cm long
(2 holes available for fastening in the base)

Weight: approx. 24kg

Rounded edges


L x W x T: 400 x 400 x 400 mm

Tolerances: $\pm 0,8\%$

Ground anchor: 2 pcs. tube 5/4" (42.4x2mm) 30cm long
(2 holes available for fastening in the base)


Weight: approx. 50 kg

Rounded edges

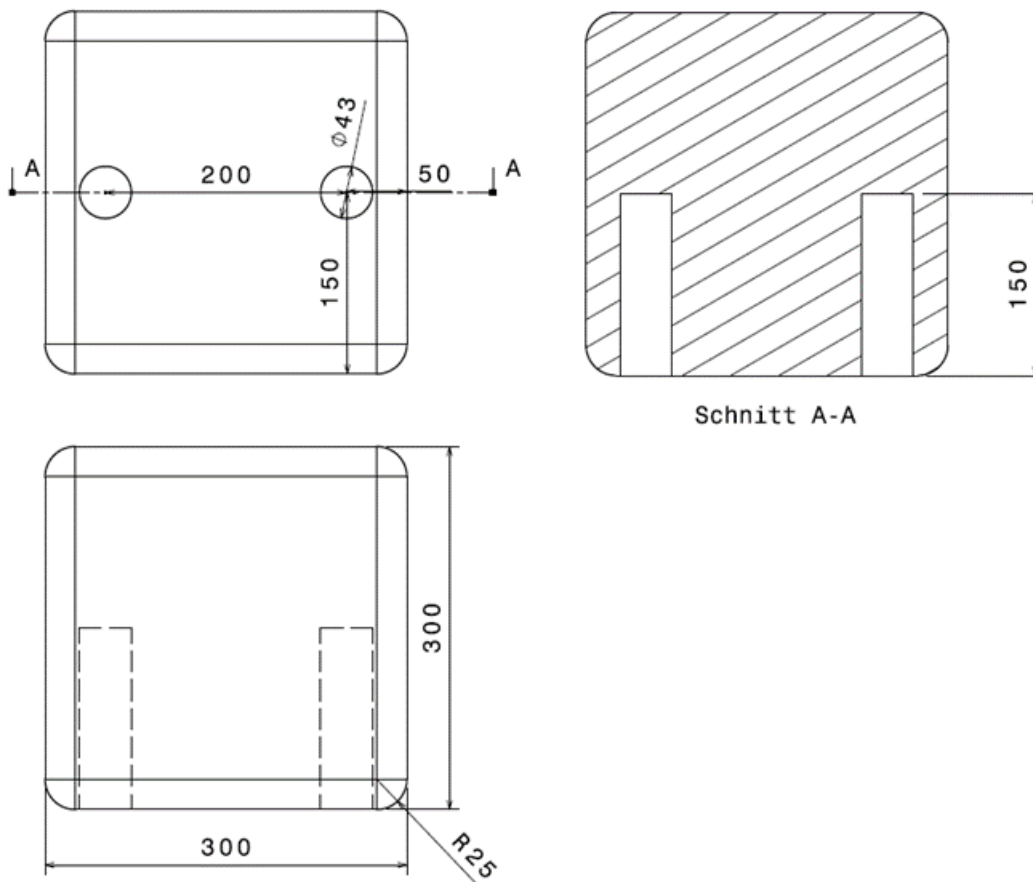

All information without guarantee, subject to change. The Data Sheet is not subject to any change service.
Each current and valid from can be recalled at www.kraiburg-relastec.com/euroflex

page 3 of 4

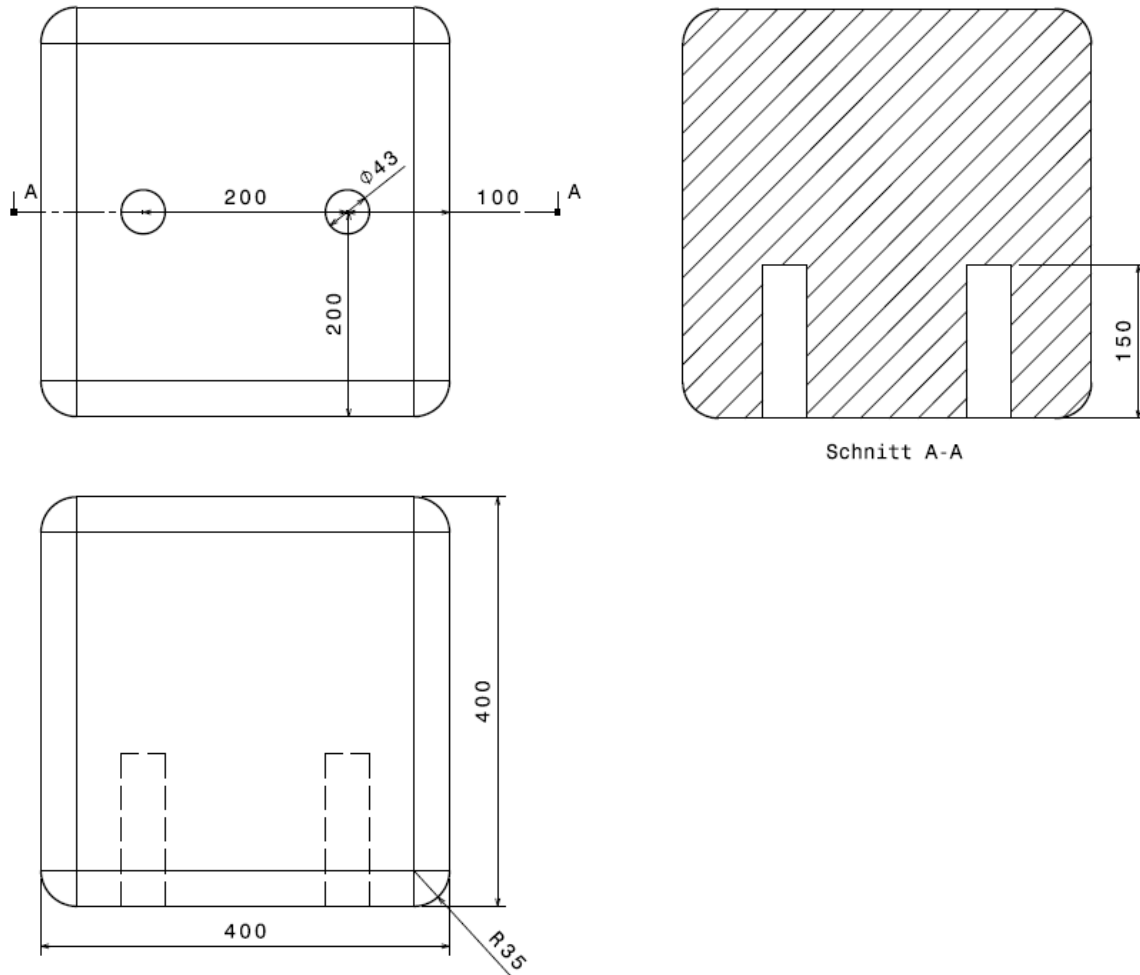

Schnitt A-A

5. Test Data

Conformity acc. to Regulation (EC) 1907/2006 SVHC list and appendix XVII
Production facility inspection

6. Installation

Note complete installation instruction.

All information without guarantee, subject to change. The Data Sheet is not subject to any change service.
Each current and valid from can be recalled at www.kraiburg-relastec.com/euroflex

page 4 of 4