

Substructure


The substructure must be frost-stable and even level.

Installation

EUROFLEX® S- & C-Blocks may be loosely stacked on flat, stable ground, or permanently bonded together. When installing on elastic, rubber-based substrates, applying adhesive to the substrate is permissible.

Gluing should have done with a polyurethane based glue Ottocoll M500 (red) or P83 (grey).

Required 1 cartridge for two blocks

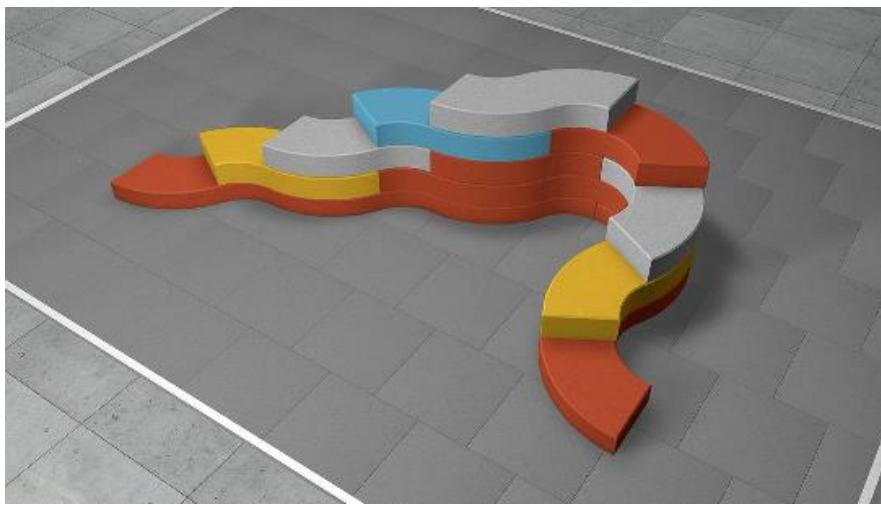


All information without guarantee, subject to change. The installation instruction is not subject to any change service. Each current and valid from can be recalled at www.kraiburg-relastec.com/euroflex/


page 1 of 4

There are two available for installation on sandy ground or lawn options:

1. Production of a strip foundation in accordance with DIN EN 206-1 and DIN 1045-2, with full-surface bonding of the lower elements or, in the case of an existing concrete substructure, adhesion using a 1-component PUR adhesive to clean, dry, and smooth concrete surfaces, ensuring a tight joint between elements. Glue or join the joints between the elements.

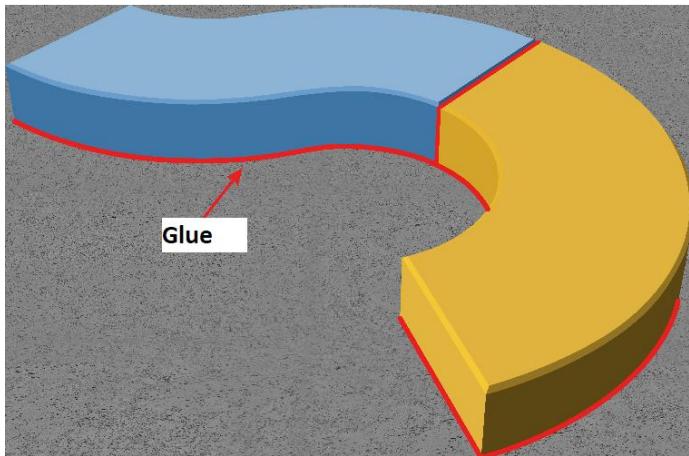

2. The EUROFLEX® C & S Blocks may be used without adhesion to the substructure and can be installed directly in a fresh concrete bed (dimensionally stable at B15). For this purpose, several galvanized hex lag screws (10 × 200 mm, minimum embedment 70 mm) are driven into the rubber and the screw heads are embedded in the fresh concrete. Glue or join the joints between the block steps.



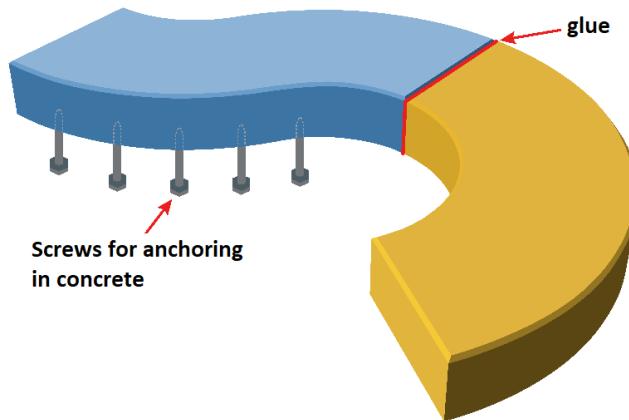


All information without guarantee, subject to change. The installation instruction is not subject to any change service. Each current and valid from can be recalled at www.kraiburg-relastec.com/euroflex/

page 2 of 4

To prevent color variation caused by differing sunlight exposure, keep the UV protection film on the products as supplied until just prior to installation.

Possible Designs

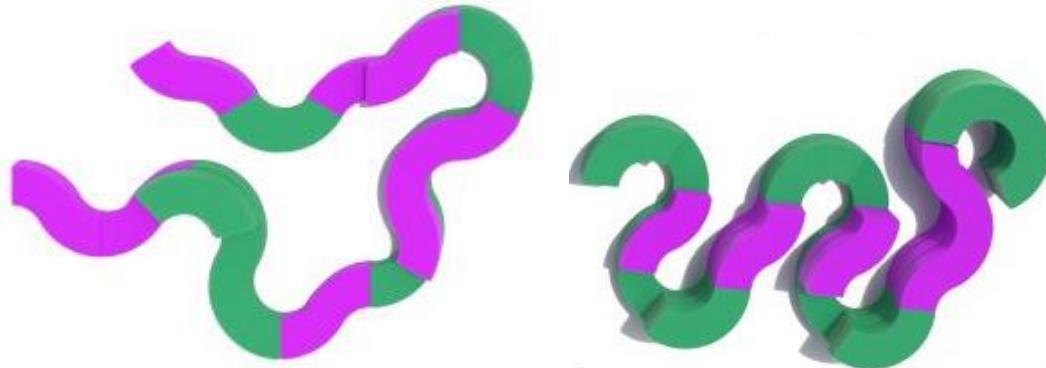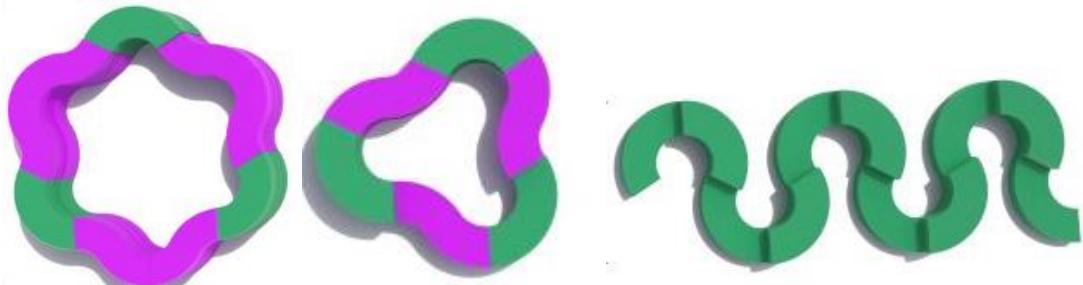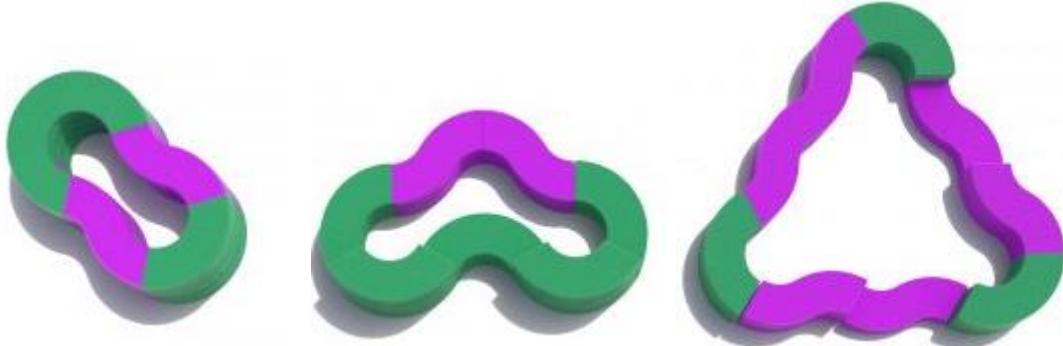

All information without guarantee, subject to change. The installation instruction is not subject to any change service. Each current and valid from can be recalled at www.kraiburg-relastec.com/euroflex/

page 3 of 4



All information without guarantee, subject to change. The installation instruction is not subject to any change service. Each current and valid from can be recalled at www.kraiburg-relastec.com/euroflex/

page 4 of 4